

SPEAKMAN®

SE-603

COMBINATION SHOWER & EYE/FACE WASH

DESCRIPTION

SE-603 Safe-T-Zone® features the SE-400 eye/face wash with six aerated sprays and rectangular stainless steel bowl combined on a powder coated galvanized steel stanchion with an impeller action deluge showerhead which is activated by a high visibility yellow pull rod.

SPECIFICATIONS

Showerhead: 8" diameter Cylolac® yellow plastic

Flow Control: Internal 20 gpm regulator

Valve: 1" NPT female brass, chrome-plated full flow stay-open ball valve

Activator: Powder coated yellow, aluminum triangular pull rod

Stanchion: 1 1/4" IPS galvanized steel piping with brass fittings

Inlet & Waste: 1 1/4" NPT female

Finish: Dura Jade powder coated finish

Performance: 20 gpm @ 20 psi flowing

EYE/FACE WASH: SE-400

Bowl: 300 series stainless steel

Spray Heads: (6) brass, chrome-plated aerated

Valve: 1/2" NPT female brass, chrome-plated

Activator: Stainless steel push handle


Inlet: 1/2" NPT female

Strainer: Brass, chrome-plated, in-line

Performance: 6.9 gpm @ 30 psi

Compliance: ANSI Z358.1

Universal Emergency Sign Included

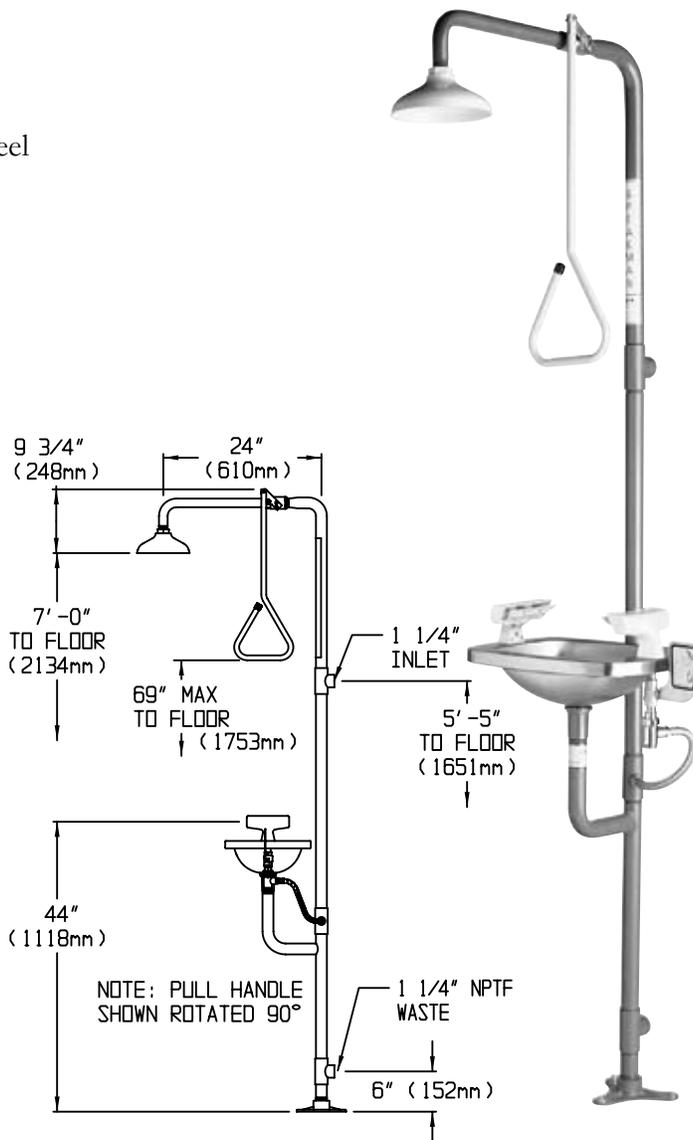

OPTIONS

- | | |
|-------------------------------|--------------------------------|
| <input type="checkbox"/> HFO | Hand foot operation |
| <input type="checkbox"/> FPV | Freeze protection valve |
| <input type="checkbox"/> SPV | Scald protection valve |
| <input type="checkbox"/> FLW | Flow switch |
| <input type="checkbox"/> HS | Hand held spray |
| <input type="checkbox"/> TS | Top supply |
| <input type="checkbox"/> SSH | Stainless steel showerhead |
| <input type="checkbox"/> SPR | Stainless steel pull rod |
| <input type="checkbox"/> SSBV | Stainless steel ball valves |
| <input type="checkbox"/> BH | Chrome plated brass showerhead |

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____