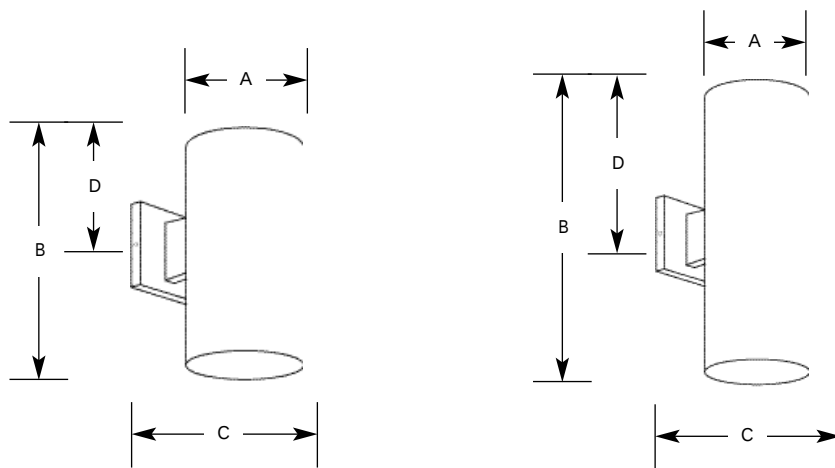


Incandescent

6" Cylinders
Wall**Outdoor**

Type	-20	-30	-31	-82
☐	☐	☐	☐	☐
☐	☐	☐	☐	☐

Catalog No.	Finish				Lamping	Dimensions (Inches)			
	Bronze	White	Black	Metallic Gray		A	B	C	D
	-20	-30	-31	-82	1-250w , 150w	6	12	8-7/8	4-1/2
	-20	-30	-31	-82	2-250w	6	18	8-7/8	8

**Specifications:**General

- Extruded aluminum .125 wall thickness one piece cylinder
- Cast aluminum wall bracket
- Down lighting
- Up/Down lighting.
top cover lens recommended when unit is used outdoors
- Interior finish matches exterior finish

Mounting

- Covers any outlet box
- Cast mounting bracket is 4-1/2" square
- Outlet box mounting bracket supplied permitting attachment of unit to wall with one almost invisible set screw

Electrical

- Medium base porcelain socket with nickel plated brass screw shell

Accessories

- Top lens cover for fixture

Options

- Bronze finish - specify "20" suffix
- White finish - specify "30" suffix
- Black finish - specify "31" suffix
- Metallic Gray finish - specify "82" suffix

Labeling

- UL-CUL wet location listed
(Only with top cover lens)