

INSTRUCTION MANUAL

Parts


 MOUNTING BRACKET

 SCREWS

 CANOPY

 HANG STRAIGHT


 FASTENER RING

 QUICK LINK


 CHAIN


 HANG STRAIGHT

 MID POLE


 LAMP BODY

 FASTENER


 SOCKET TUBE




① Release the mounting bracket from the canopy.




⑤ Let the Fastener ring and Canopy go through the Chain, let the cable go through the thread of the Mounting Bracket, connect the Hang Ring and Hang Straight with the Chain by the Quick Link, then connect the wires.




② Fasten the mounting bracket (with Hang Straight) to the ceiling Junction box by the screws.

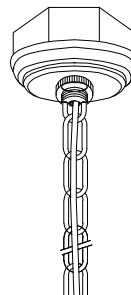


⑥ Position Canopy over Mounting Bracket then lock the Canopy by Fastener Ring.

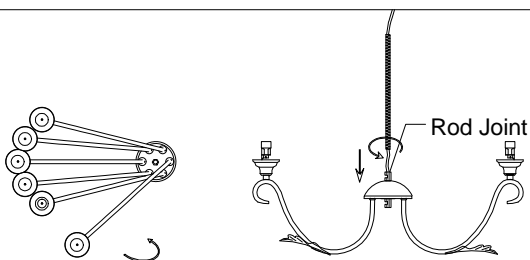

③ Divide the Arm equally, then install the bolt to the rod joint of the Lamp body.

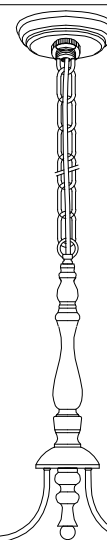

⑦ Put on the Socket Tube and then fasten the Lamp bulbs to the lampholders, E12x6 pcs, type B, 60W Max is recommended.

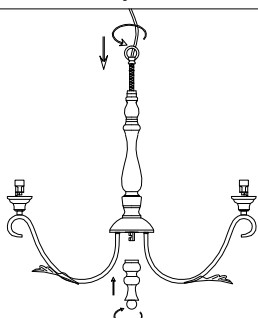

④ Let the Mid Pole go through the bolt and fasten it by the Hang Straight.

Install the bottom Fastener to the Lamp Body.