


8

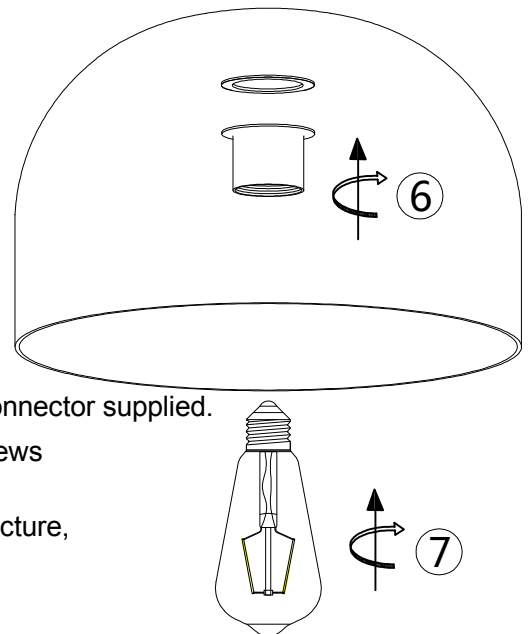

- 1 : Please turn off the power first.
- 2: As shown in the picture, connect the boom (height can be matched freely)
- 3 : Screw the hanging board to the junction box.
- 4: Connect all the wiring L/N/G as diagram shows using plastic connector supplied.
- 5: Stick the ceiling on the mounting bracket Use the mounting screws provided with the fittings to tighten
- 6: Fix the glass lamp shade on the lamp holder as shown in the picture, and fix it with a fixing cup
- 7: Install the light bulb (E26 socket).
- 8: Please turn on the power