


CAUTION – RISK OF SHOCK –
Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.

- 1) First rotate the fixture arms to 60 degrees.
- 2) Slide the lower cup up to the body and screw the crystal finial up to the lower cup until snug to hold the lower cup into place.
- 3) Screw in the (5) three studded ball knobs into the top of the arms securely.
- 4) Pass fixture wire thru threaded hole in first loop. Thread loop onto the nipple that protrudes from the top of the fixture. Tighten to secure.
- 5) Pass fixture electrical wire and ground wire through item “A” with hexnut and screw into the fixture bottom as shown, tighten the hexnut snugly. Slide item “B” over item “A” and place trim onto item “B”. Place item “C” onto the trim and thread the loop onto item “A” and tighten down against item “C”. Attach the chain to the loop and weave the wire and ground wire through the chain.
- 6) Take threaded pipe from parts bag and screw in screw collar loop a minimum of 6 mm (1/4”). Lock into place with hexnut.
- 7) Now screw threaded pipe into mounting strap using supplied screws. Mounting strap must be positioned with extruded thread faced into outlet box. Threaded pipe must protrude out the back of mounting strap. Connect mounting strap to outlet box.
- 8) After desired position is found, tighten top hexnut up against the bottom of the mounting strap.
- 9) Slip canopy over screw collar loop and thread on threaded ring. Attach chain (with fixture connected) to bottom of screw collar loop. Unscrew threaded ring, let canopy and threaded ring slip down.
- 10) Pass wire through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.
- 11) Make wire connections per 14 instructions below.
- 12) Get the (5) three crystal finials and thread up into place on each arm below the sockets.
- 13) Slide the bobèche over the sockets.
- 14) Grounding instructions: (See Illus. A or B)
 - A) On fixtures where mounting strap is provided with a hole and two raise dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
 - B) On fixtures where a cupped washer is provided. Put ground wire from outlet box under cupped washer and green ground screw and thread screw into hole in mounting strap.


If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector, after following the above steps. Never connect ground wire to black or white power supply wires.

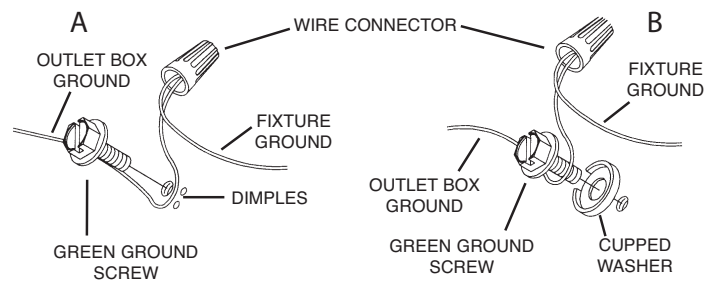

- 15) Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 16) Pass fixture wires thru hole in canopy. Make sure open side of canopy faces ceiling. Pass canopy over the (2) mounting screws and using the (2) two lockwashers and (2) two slotted lockup knobs secure the canopy to the ceiling. Make sure all wires are inside canopy and do not get pinched between canopy and ceiling
- 17) Insert recommended bulb (not included).

