


CHANDELIER



INSTALLATION MANUAL

TOOLS REQUIRED

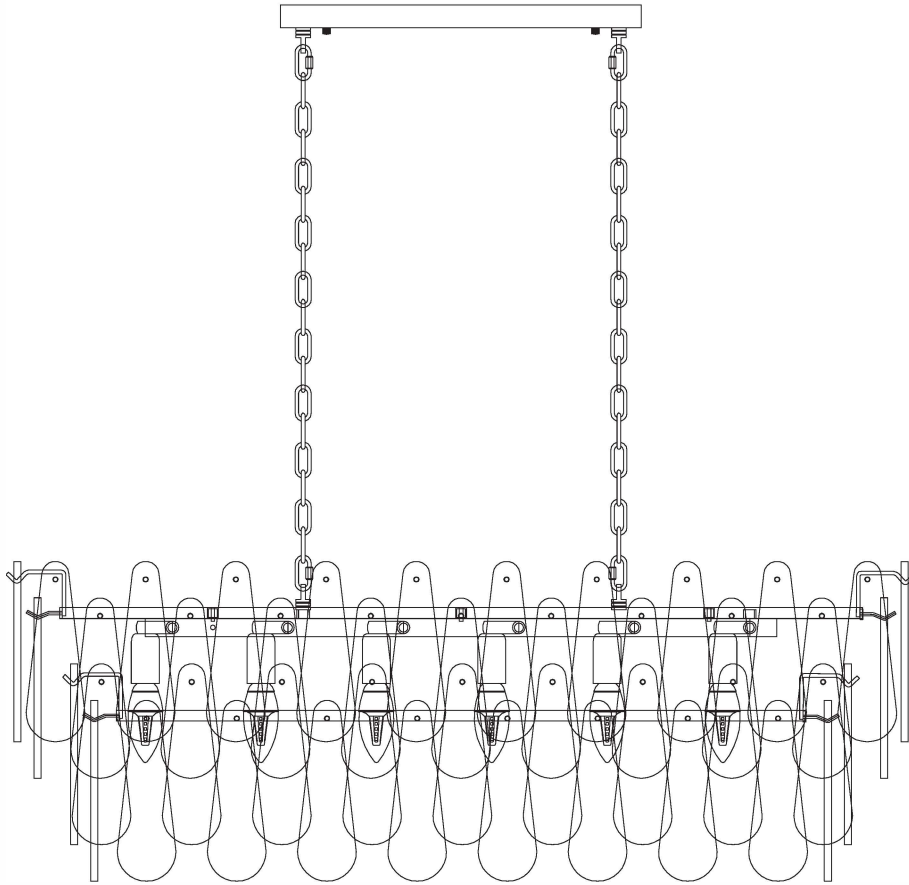

Ladder



Pliers




Wire Strippers



Screwdrivers


01

PACKING LIST

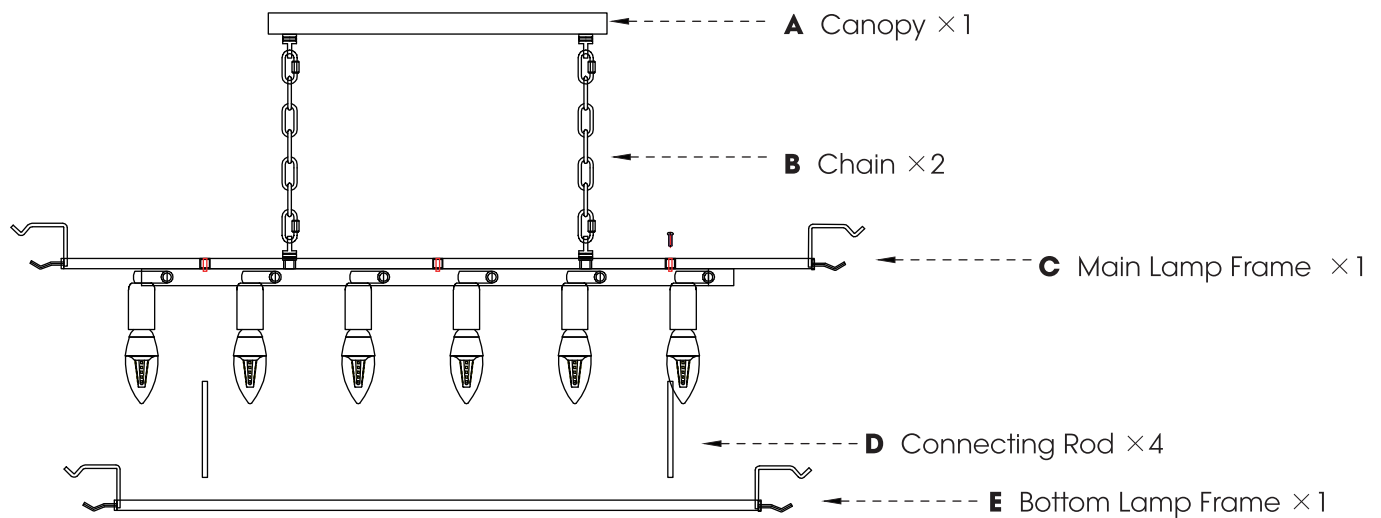

02

INSTALLATION KIT

AA 1X  Mounting Bracket	BB 1X  Ground Screw	CC 2X  Outlet Box Screw	DD 2X  Wire Nut
EE 4X  Plastic Anchor	FF 4X  Wood Screw	GG 4X  Flat Washer	HH 4X  Knurled Nut
II 4X  M4 Screw	JJ 4X  M3 Screw	KK 80X  Alabaster	LL 4X  Hex Nut
MM 1X  Gloves			

NOTE:

1. Some extra hardware may be included. The quantity listed above is the number required for installation.
2. BB/HH/LL is pre-installed on AA, AA is pre-installed on the Canopy (A).



03

INSTALLATION

1. Install the Mounting Bracket

Step 1: Loosen the Knurled Nut (HH) and remove the Mounting Bracket (AA) from the Canopy (A).


Step 2: Secure the Mounting Bracket (AA) onto the box with Outlet Box Screws (CC).

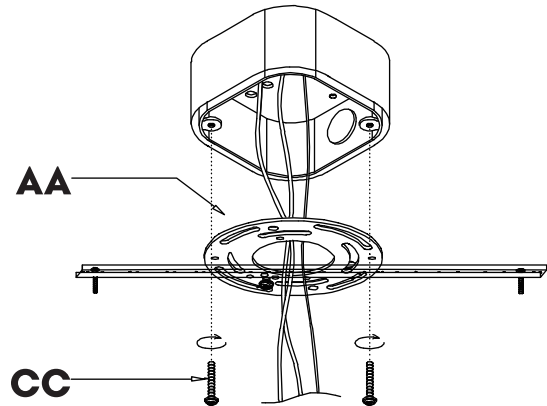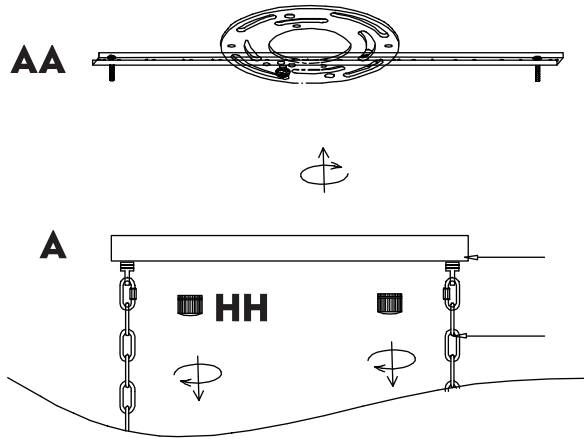

2. Assemble the Lamp Frame

Step 1: Install the Connecting Rod (D) onto the Main Lamp Frame (C) using M4 Screws (II).


Step 2: Install the Bottom Lamp Frame (E) to Connecting Rod (D) using the M3 Screws (JJ).

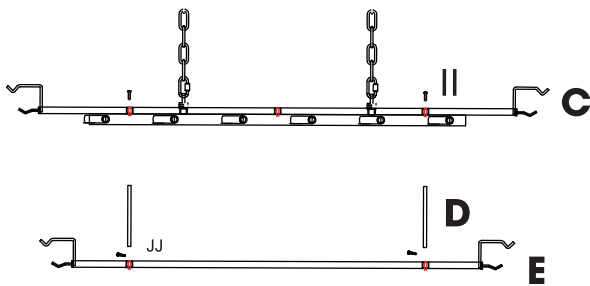

3. Thread the wire and Install the Chain

Step 1: Pass the fixture wires through Chain (B) and Canopy (A).

Step 2: Loosen the Quick Links at both ends of the chain, install the Chain (B) onto the Canopy (A) and the Main Lamp Frame (C), and then tighten the Quick Links.

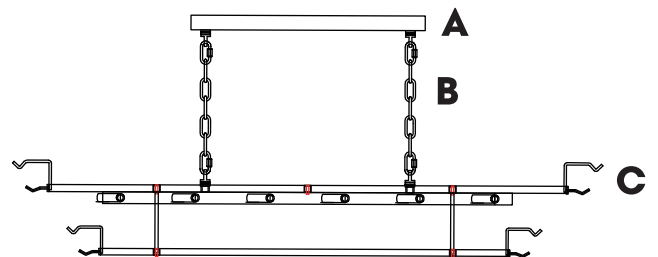


4. Wiring and Installing the Canopy

Step 1: Wrap the ground wire from the outlet box around the Ground Screw on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.

Step 2: Connect the wires from the fixture to the house supply wires, neutral (white) to neutral wire, and hot (black) to hot wire.

Step 3: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

Step 4: Install the Canopy (A) onto the Mounting Bracket (AA) with the Knurled Nut (HH).

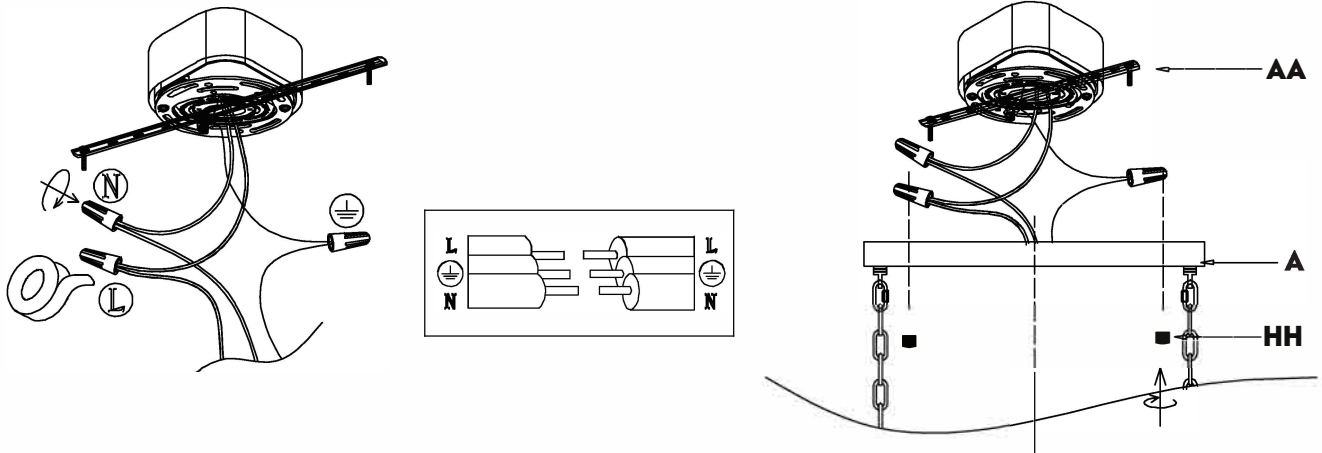

5. Install the Bulbs


E12 Bulbs X 10.

(Max 40W each, not included)

NOTE:

This lamp uses E12 bulbs up to 40W.

Fully dimmable when used with dimmable bulbs and compatible dimming switches (not included).

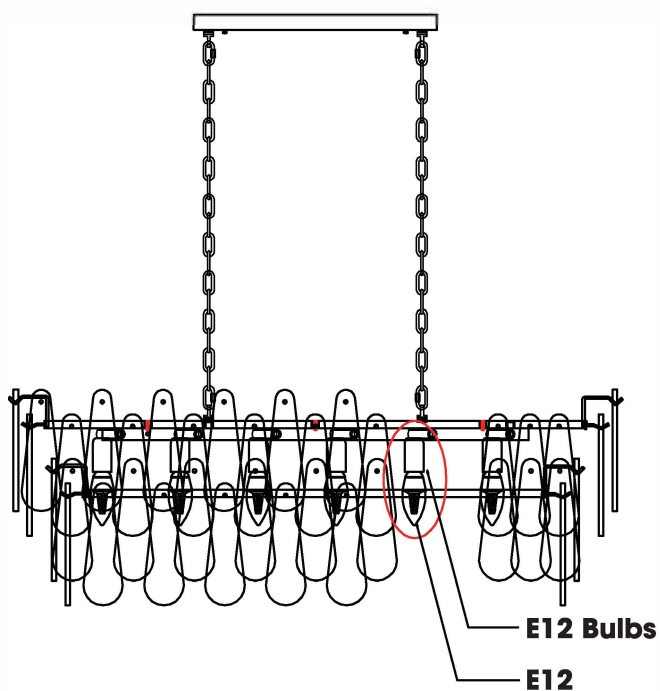

6. Install the Alabasters

Install the Alabasters (KK) to the Lamp Frame.

