


Assembly & Installation Instructions

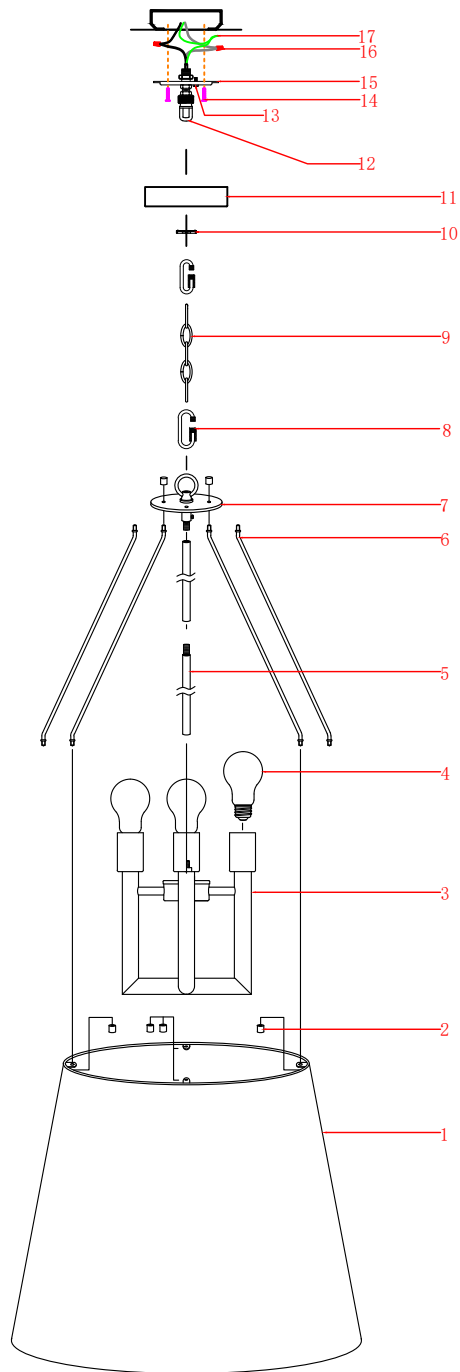

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

- A. Feed the wires and ground wire of the socket assembly (3) through 2 tubes (5) respectively, then attach the tubes to the socket assembly (3).
- B. Feed the wires and ground wire through the connector ring (7), then fasten the connector ring (7) to the tubes (5).
- C. Fasten 4 suspension rods (6) to fabric shade (1) and connector ring (7) with decorative nuts (2).
- D. Feed wires and ground wire through the chain (9), then connect the chain to the connector ring (7) with a quick link (8). (Chain length can be adjusted as needed.)
- E. Feed wires and ground wire through the screw collar loop ring (10), canopy (11), and mounting bracket (15). Connect the chain (9) to the screw collar loop (12) using another quick link (8).
- F. Two-person assembly required: One person supports the fixture while the other secures the mounting bracket (15) to the junction box using the mounting screws (14).
- G. Connect the wires using the wire caps (16) as follows:
 - Connect the fixture POSITIVE wire (marked with "L" or printed text) to the home HOT wire.
 - Connect the fixture NEGATIVE wire (marked with "N" or no text) to the home NEUTRAL wire.
 - Secure the fixture ground wire (17) and the external ground wire to the mounting bracket (15) with a green screw (13), then use a wire cap to connect the fixture ground wire to the external ground wire.
- *Note: Ensure no bare wire is exposed to prevent leakage.
- H. Tuck all wires neatly into the junction box, then secure the canopy (11) to the screw collar loop (12) with the screw collar loop ring (10).
- I. Install E26 bulbs (4) onto the lamp holders. Refer to the warning label on the holders for the maximum wattage.