

DESCRIPTION

- Electronic toilet with bidet cleansing and remote control

INSTALLATION REQUIREMENTS

- Required: 120V AC power outlet on a 10A minimum circuit
- Requires minimum dynamic (flowing) water pressure of 11 psi (0.08MPa) and a maximum static (non-flowing) water pressure of 109 psi (0.75MPa)
- Requires toilet rough-in to be 12" (30.5cm) from center of drain hole to water supply line

FLOW

- 1.0 gpf (3.8 lpf)

STANDARDS

- Third party certified by Intertek:
- ASME A112.4.2 / CSA B45.16 Personal hygiene devices for water closets, which includes conformity to IAPMO / ANSI Z124.5 plastic toilet seats
- ASME A112.19.2/CSA B45.1 Ceramic plumbing fixtures
- CSA C22.2 no. 68 Motor-operated appliances (household and commercial)
- CSA C22.2 no. 64 Household cooking and liquid-heating appliances
- UL 1431 standard for personal hygiene and health care appliances
- ADA Compliant
- Third party certified to WaterSense®



WARRANTY

- Limited 3 year warranty against leaks and finish defects to the original consumer purchaser
 - 1 year warranty if used in commercial installations
- Visit www.moen.com/support for complete details and limitations



Moen®
eToilet

MODELS: ET900, ET1300 (shown)

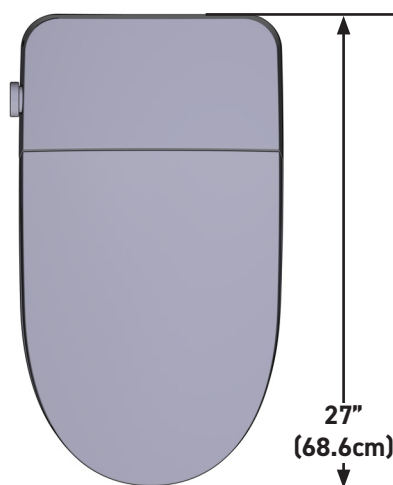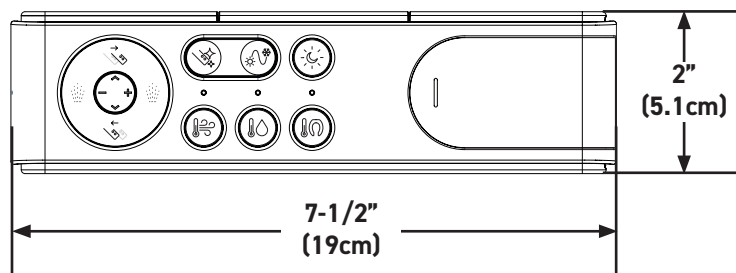

CRITICAL DIMENSIONS DO NOT SCALE

MOEN® eToilet Feature Comparison Chart



ET900 with Remote



ET1100 with Remote



ET1300 with Remote



ET2200 with Remote

CLEANSING				
Anterior Cleanse	•	•	•	•
Posterior Cleanse	•	•	•	•
Oscillating Cleanse	•	•	•	•
Pulsating Cleanse	•	•	•	•
Water Pressure Control	•	•	•	•
Water Temperature Control	•	•	•	•
Nozzle Position Adjustment	•	•	•	•
Instantaneous Water Heating	•	•	•	•
AIR DRYING				
Air Dryer	•	•	•	•
Flash Drying		•	•	•
Air Temperature Control	•	•	•	•
SEAT				
Antimicrobial Seat	•	•	•	•
Heated Seat with Temperature Control	•	•	•	•
Softclose Seat and Lid	•	•	•	•
Foot Touch Open Seat and Lid				•
HYGIENE				
Self-Cleaning Nozzle	•	•	•	•
Antibacterial Nozzle (Silver Nanotech)	•	•	•	•
Nozzle UV Sterilization		•	•	•
Replaceable Nozzle	•	•	•	•
Air Purifier (Deodorizer)		•	•	•
ENERGY SAVING				
Auto Energy Saver	•	•	•	•
On/Off Button	•	•	•	•
High Efficiency Flush (1.0 GPF/3.8 LPF)	•	•	•	•
SENSOR				
Seat Sensor	•	•	•	•
Night Light	•	•	•	•
Sensing Night Light	•	•	•	•
Automatic Flush	•	•	•	•
Automatic Open/Close Lid				•
CONTROL				
Remote Flush	•	•	•	•
Remote Open Seat and Lid			•	•
Knob Control	•	•	•	•
FLUSH				
Foot Touch Flush				•
Low Pressure Flush (MIN 0.08 PMA)	•	•	•	•