

CORE

BREEZE II

UNDER-CABINET

ZEPHYR

ZEPHYRONLINE.COM



Stainless Steel




Black Stainless




Black




White

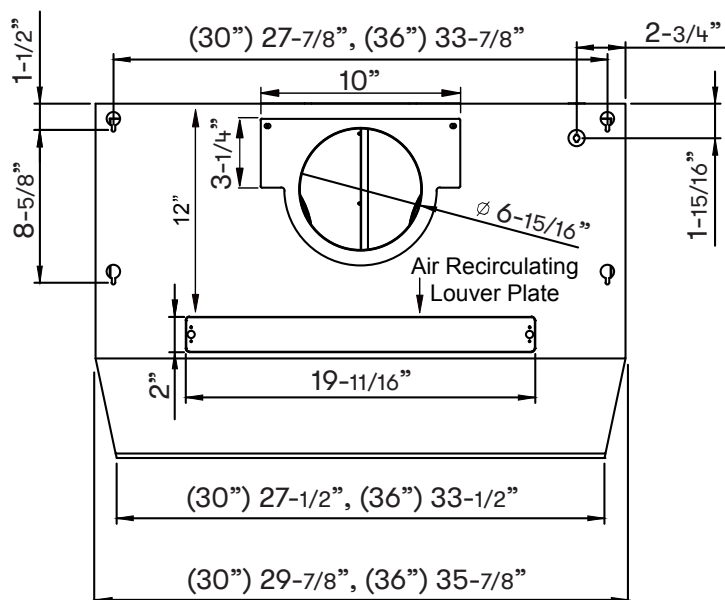

TOP

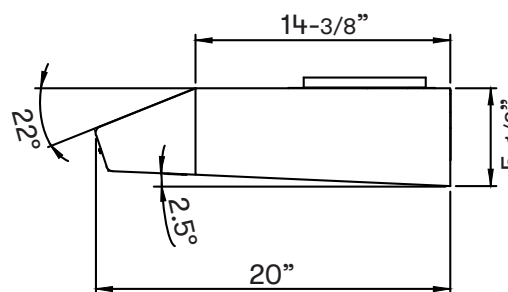

SIDE

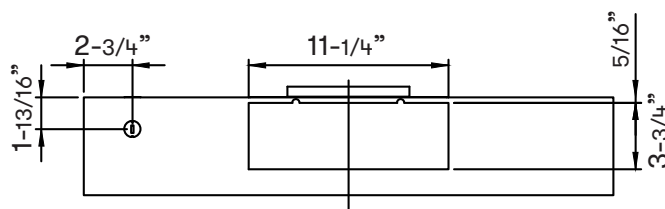

BACK

MODEL

Black	AK1200CB	AK1236CB
White	AK1200CW	AK1236CW
Black Stainless Steel	AK1200CBS	AK1236CBS
Stainless Steel	AK1200CS	AK1236CS
Size	30" (29-7/8")	36" (35-7/8")

BLOWER PERFORMANCE

Blower CFM (Min. - Max.)	175 - 400	175 - 400
Sones (Min. - Max.)	1.9 - 4.5	1.9 - 4.5

FEATURES

Controls	Electronic Touch	Electronic Touch
Speed Levels	3	3
Auto Delay-Off	Yes	Yes
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2
Dual-Level Lighting	Yes	Yes
Filters	Aluminum Mesh x2	Aluminum Mesh x2
Recirculating Option	Yes	Yes

DUCT SPECIFICATIONS

Vertical Internal Blower	7" Round or 3-1/4" x 10"	7" Round or 3-1/4" x 10"
Horizontal Internal Blower	3-1/4" x 10"	3-1/4" x 10"
AC POWER	120V, 60Hz at Max. 2A	120V, 60Hz at Max. 2A

OPTIONAL ACCESSORIES

Recirculating Kit	ZRC-0012	ZRC-0012
Stainless Steel Telescopic Backsplash	AK1710	AK1716
Damper, 7" Round	AK00067	AK00067

MOUNTING HEIGHT RANGE*

Electric Cooking Surface	20" - 32"	20" - 32"
Gas Cooking Surface	24" - 32"	24" - 32"

WARRANTY

3 years parts, 1 year labor 3 years parts, 1 year labor

*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.