



Awaken® G90 | K-98361

24" three-function handshower kit, 2.0 gpm

Features

- Handshower features contemporary design
- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray
- Wide coverage spray produces an encompassing spray for everyday use
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray
- Thumb tab allows for a smooth transition between sprays
- Spray nozzles cover full area of sprayhead
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.0 gpm (7.6 lpm) maximum flow rate
- Slidebar features adjustable mounting brackets for installation flexibility
- Includes 60" (1524 mm) ribbon hose
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
7-29-2026 22:20 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

OBC compliant when installed to the specific requirements of these regulations.



OBC

ASME A112.18.1/CSA B125.1
EPA WaterSense®
OBC

Technical Information

All product dimensions are nominal.

Flow Rate

Handshower Rated Maximum 2 gpm (7.6 l/min)

Flow:

Material

- KOHLER finishes resist corrosion and tarnishing
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-30647 Showerhead replacement filter, two-pack

K-23723 Faucet cleaner


K-30646 Showerhead filter

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



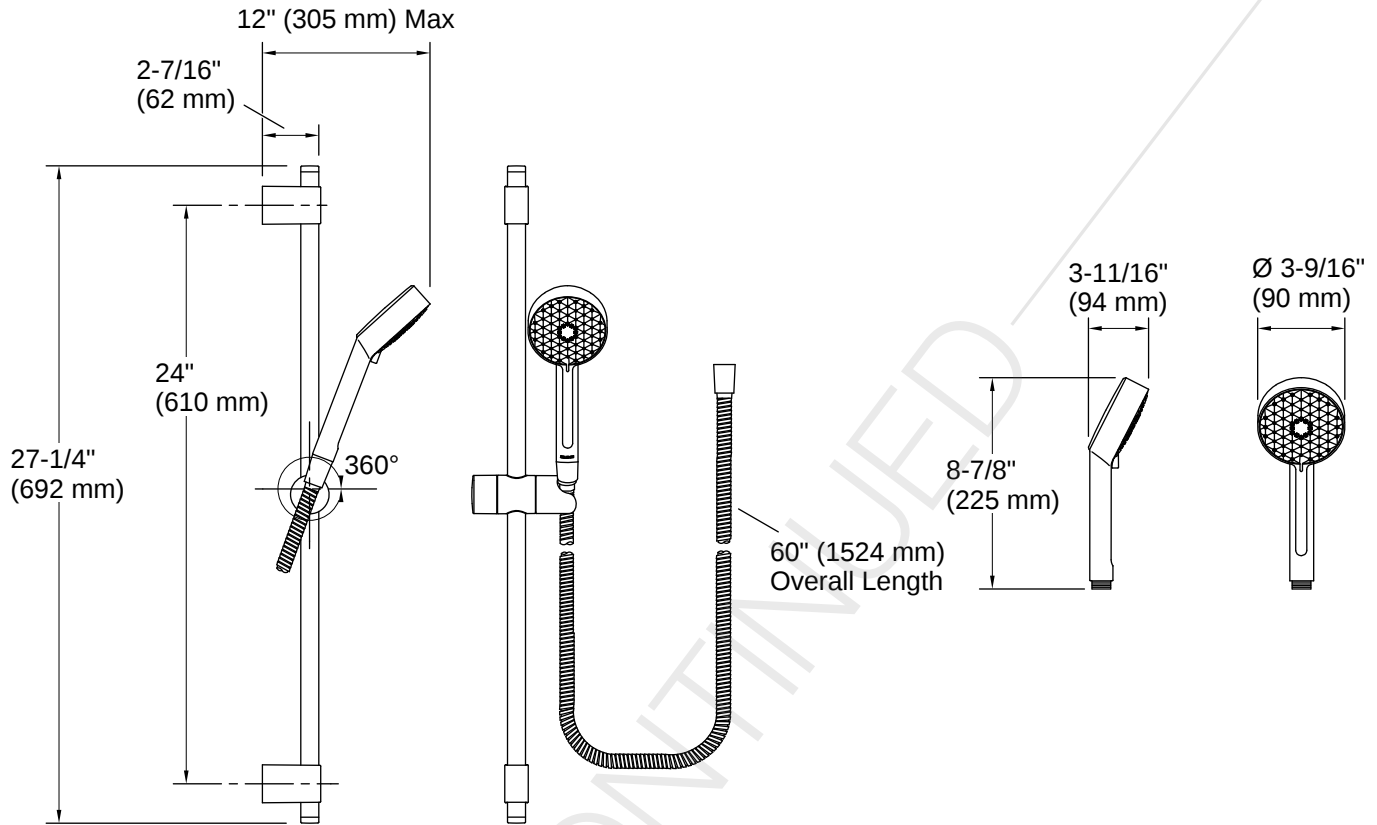

Installation Notes

Install this product according to the installation instructions.

Mount the sidebar to stud framing or install backing support. For tile or other solid finish surfaces: Pre-drill mounting holes through surface material only; do not drill into the stud. For drywall surface: No pre-drill is required.
 NOTE: The mounting brackets can be adjusted to align with existing holes for retrofit installations.
 OBC compliant when installed to the specific requirements of these regulations.

