

Please Read the Instruction Thoroughly Before Operation

Caution:


- 1.DO NOT install the cover on windy days or when the roof is slippery.
- 2.BE CAREFUL when you are on the ladder or the RV roof
- 3.It is advisable to have two people for installing the RV cover.
- 4.Please use rags or foam to cover any sharp edges on your RV that may potentially tear the RV cover.
- 5.Remember to retract all antennas and disassemble any roof equipment with sharp edges.
- 6.To prevent scratches on the RV, ensure the RV roof is thoroughly cleaned before installing the RV cover.
- 7.When installing the RV cover, please be cautious when working on the RV roof. The gray coating or the Oxford fabric is slippery.

Before Installation: Prepare Your RV

- 1.Please make sure the RV is clean and dry before installing the RV cover
- 2.Please check the RV for any sharp edges that may puncture the RV cover.
- 3.Please cover the gutter spout with the provided gutter covers before RV cover installation.
- 4.Fold up the RV mirrors to ensure a snug fit.
- 5.Keep the RV cover away from heat sources, such as stoves or heaters.
- 6.Turn off all electrical appliances before RV cover installation.
- 7.For a more detailed demonstration, search "RV Cover Installation" on YouTube

Installation:


- 1.Unboxing: Remove all contents from the box for inspection; in case of missing parts,accessories,or defective products,please contact us!
- 2.Spread out the RV cover evenly on the ground. Locate the FRONT and END tags on the opposite ends of the RV cover. (Fig.1)



- 3.Sweep the RV roof for debris before installation. Position the rolled-up cover on the front of the RV roof, Unroll the RV cover on the roof from front to back, Ensure the FRONT and END tags are on the corresponding sides of the RV. (Fig.2)




- 4.Encase the spouts with sponges and cover them with the provided gutter covers.
- 5.Unfold the RV cover completely, let it drop down and distribute it into position, Letting it fall over the side of your Ry. (Fig.3)

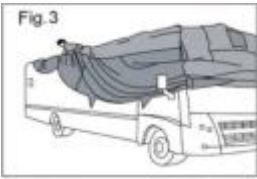

- 6.Attach the front and back straps, then pull them tight, (Fig.4) Do NOT over tighten the straps.



- 7.Install bottom windproof straps: clip onto the throwing stick - toss it to the other side under the RV . disconnect the throwing stick - connect the strap to the cover - pull tight - repeat for the other end. (Fig.5) (Fig.6)

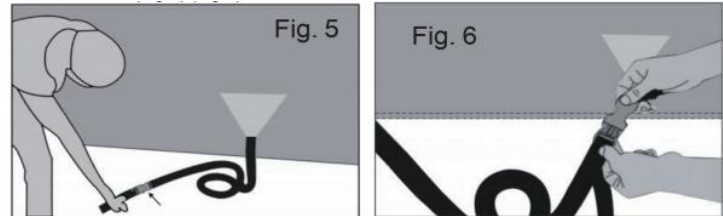


8.install 2 longitudinal fully wrapped webbing straps: Toss the big straps over the camper(please DO NOT use the throwing stick as it may lead to roof damage). Once the big strap is over on the other side, connect the throwing stick and toss it back to the other side under the RV. Disconnect the throwing stick, close the loop. Adjust the strap location and pull tight.Repeat for the other big strap. (Fig.7)



Clean and Care:

9.We have prepared relevant accessories for replacement. Please follow the instructions in the pictures for installation if replacement is needed. (Fig.8) (Fig. 9)

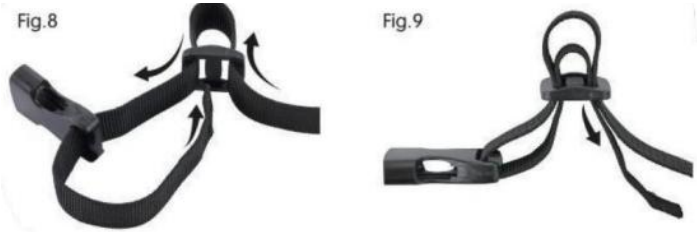

10. For the travel trailer RV, place the tongue jack cover over the jack. (Fig.10)



- 1.We recommend utilizing a sponge soaked in a blend of detergent and water for the upkeep
- 2.DO NOT machine-washing the RV cover, as it may compromise its UV-resistant qualities.
- 3.DO NOT use a brush or intricate tool to clean the cover.
- 4.Please ensure the RV cover is dry when folding it up for storage.

After-Sale Services:

We are committed to our product and prioritize our customers above all else, valuing their feedback and requirements. if you have any concerns, such as defective products or missingaccess0ries, please do not hesitate to reach out to us via the Amazon message center.

Table Applicable RVs and Cover Dimensions

Travel Trailer RV Cover	
RV Size	RV Cover Dimension
18-20FT	242" (L)*105" (W)*108" (H)
22-24FT	288" (L)*107" (W)*108" (H)
27-30FT	360" (L) x105" (W) x108" (H)
30-33FT	396" (L) x105" (W) x108" (H)