Kubos™ Diverter Trim and Shower Combination (Valve not included)

FEATURES:

• CPT-24400: Diverter Shower Valve Trim 2.5 GPM (9.5 L/min Flow Rate • S-3021:

Shower Head

• S-2560: Shower Arm and Flange

VALVE OPTIONS:

• CPV-PB-DV: Pressure Balance Diverter Valve Sweat &

Thread Connections

• CPV-PB-DV-PXC: Pressure Balance Diverter Valve PEX

F1807 Crimp Inlet Connections

• CPV-PB-DV-PXE: Pressure Balance Diverter Valve PEX

F1960 Cold-Expansion Inlet Connections

• CPV-T-DV: Thermostatic Diverter Valve Sweat &

Thread Connections

Thermostatic Diverter Valve PEX F1807 • CPV-T-DV-PXC:

Crimp Inlet Connections

• CPV-T-DV-PXE: Thermostatic Diverter Valve PEX F1960

Cold-Expansion Inlet Connections

STOCK FINISHES:



STANDARDS:

• ASME A112.18.1/CSA B125.1 certified

ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

• See Speakman.com For Warranty Information








Information continues on next page

Kubos™ Diverter Trim and Shower Combination (Valve not included)

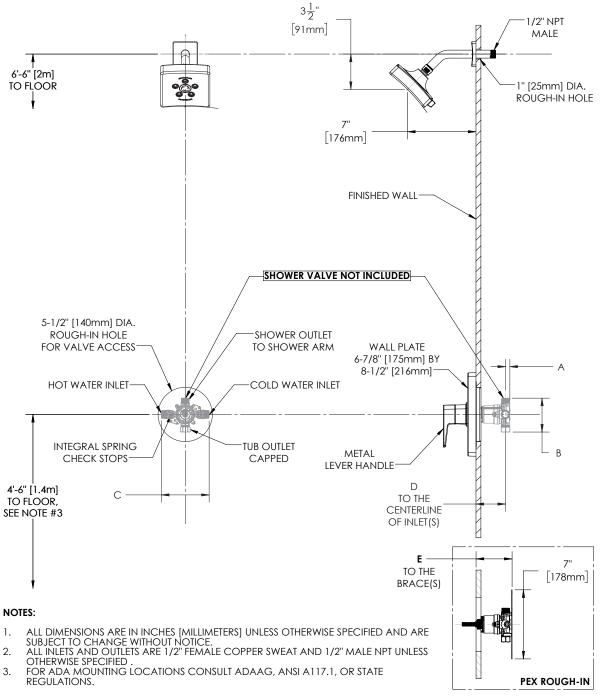

DIMENSION	CPV-PB	CPV-T	CPV-PB-PXC	CPV-PB-PXE	CPV-T-PXC	CPV-T-PXE
Α	7/16" (11mm)	1/2" (12mm)	7/16" (11mm)		1/2" (12mm)	
В	3-5/16" (84mm)	3-1/2" (89mm)	3-5/16" (84mm)		3-1/2" (89mm)	
С	4-13/16" (123mm)	5-7/8" (150mm)	4-13/16" (123mm)		5-7/8" (150mm)	
D	2-1/2" (63mm) MIN TO 3-1/2" (89mm) MAX					
E			3-1/8" (79mm) MIN TC	4-1/8" (105mm) MAX	3-3/16" (81mm) MIN TO	4-3/16" (106mm) MAX