


- LG49-VRV2B Finish(B) ☐
- LG49-VRV2BG Finish(BG) ☐
- LG49-VRV2C Finish(C) ☐
- LG49-VRV2D Finish(D) ☐

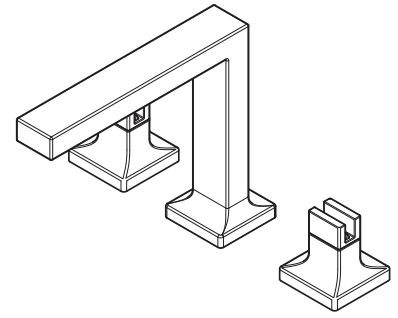

Specifications

- 3-Hole Installation

Features

- 1.2 GPM Flow Rate
- Adjustable Install
- Concealed Screws
- Fixed Hubs
- Metal Push & Seal™ Drain
- Mounting Hardware Included
- Supply Lines Not Included
- Optional Handles Available:
For L Handles Order HHL-VRVL*
For T Handles Order HHL-VRVT*
For Cross Handles Order HHL-VRVX*
- UltraSeal™ Ceramic Disc Valve
- Pforever Warranty®




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

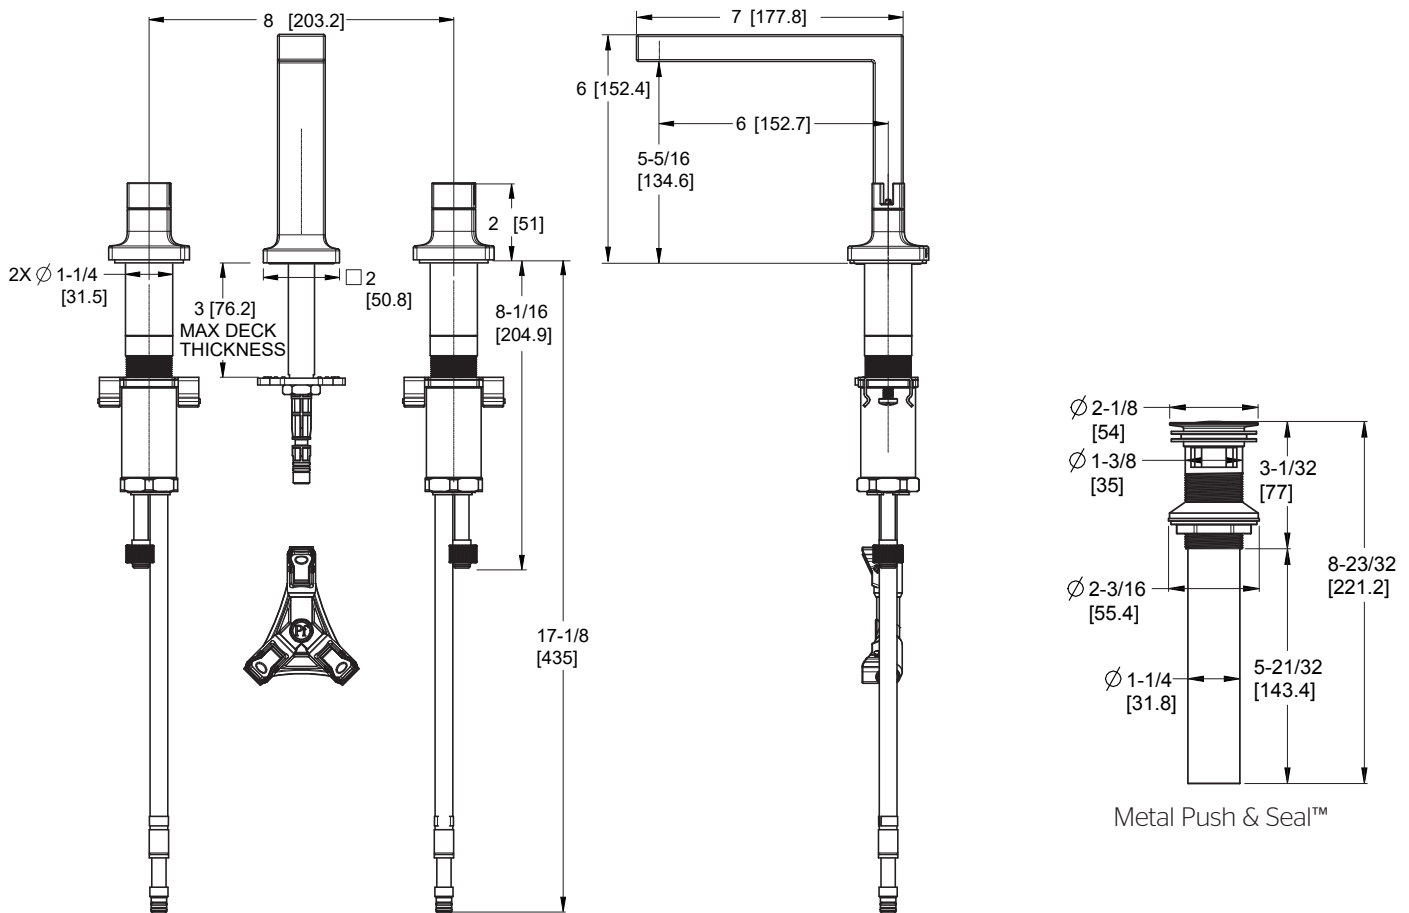

Ø1-1/4 Min to Ø1-1/2 Max. Deck Hole Openings