

ASSEMBLY INSTRUCTIONS



CHAIR

Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts that may have come loose inside the carton during shipment.

Parts key			Hardware kit				
No	Qty	Description	No	Description		Qty	
1	1 pc	Chair Back	A		Hexa Nut Ø8	4	pcs
2	1 pc	Complete Seat	B		Lock Washer Ø8	11	pcs
3	2 pcs	Front Leg Floor	C		Flat Washer Ø8	11	pcs
4	4 pcs	Glide	D		Long Bolt Ø7.8 x 80	4	pcs
FABRIC CARE INSTRUCTIONS REGULAR CARE FABRIC CONTENT 100% Polyester - Cleaning code W Blot gently using a clean soft damp cloth and mild detergent DO NOT SATURATE			E		Short Bolt Ø7.8 x 35	3	pcs
			F		Allen Key K4	1	pc
			G		Key Wrench 12	1	pc

STEP 1

- Carefully lay Chair Back flat on a smooth flat surface to prevent scratches.
- Attach Complete Seat to Chair Back by inserting a Flat Washer, Lock Washer and Short bolt into each of the hole on the back of the seat. Tighten screws with provided Allen Key by turning clockwise until secure. (See Detail A).
- Insert a Flat Washer, Lock Washer and Long screw into each of 2 holes in the Complete Seat corners. Tighten screws with provided Key Wrench. (See Detail B).

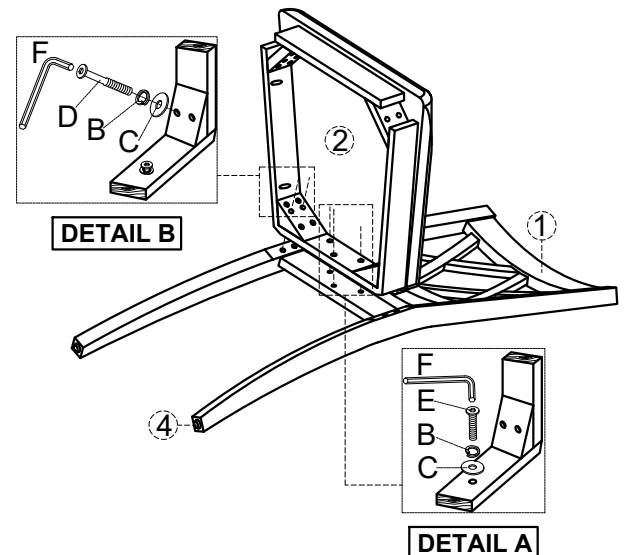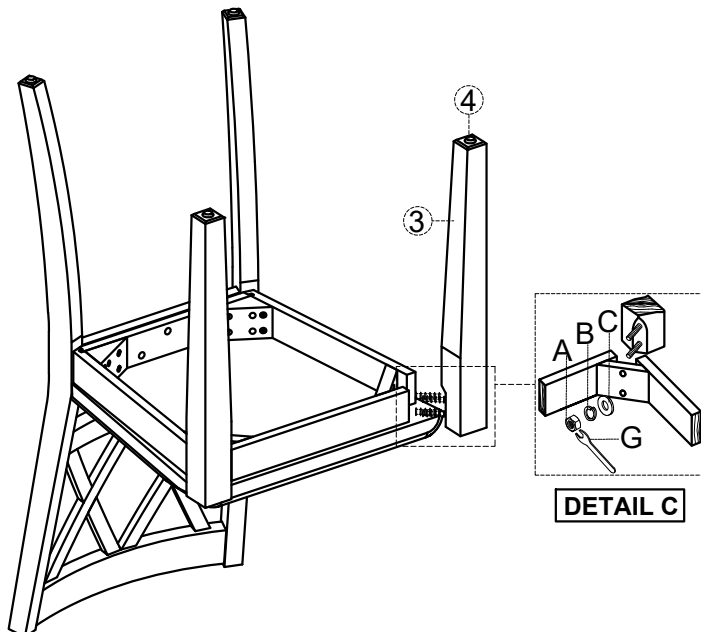

STEP 2

- Carefully turn chair upside down and attach each Leg to the front corners of the Complete Seat. Place Flat Washer, Lock Washer and Nut on each leg bolt, tightening the Nut on each Leg using provided Key Wrench. (See Detail C).
- Be sure to level the chair prior to tightening all the nuts/screws.

