

## **VANITY LIGHT FIXTURE** **INSTALLATION INSTRUCTIONS**

Please read carefully and save these instructions, as you may need them a later date.

### **CAUTION**

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.


### **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections, obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

### **ASSEMBLY AND INSTALLATION**

- 1, Drill the Anchor into the wall, thread the Tapping Screw to the Cross bar, then screw the Hex nut on the Screw-1.
- 2, Attach the Cross Bar to the Outlet Box by 2 pcs Mounting Screws-2
- 3, Make wire connections:
  - Twist together the white wire from the fixture with the white wire from outlet box. Cover with wire connector
  - Twist together the black wire from the fixture with the black wire from outlet box. Cover with wire connector
  - Attach the ground wire to the cross bar with a green ground screw. Carefully tuck wire back into the OUTLET BOX
- 4, Place the Back plate against the Outlet box, secure with the Ball nut
- 5, Put the Shade onto the Socket and screw with the Ring.
6. Install bulbs: (Bulbs not including in the package)  
(Please don't exceed the maximum capacity that recommended on the Sockets)

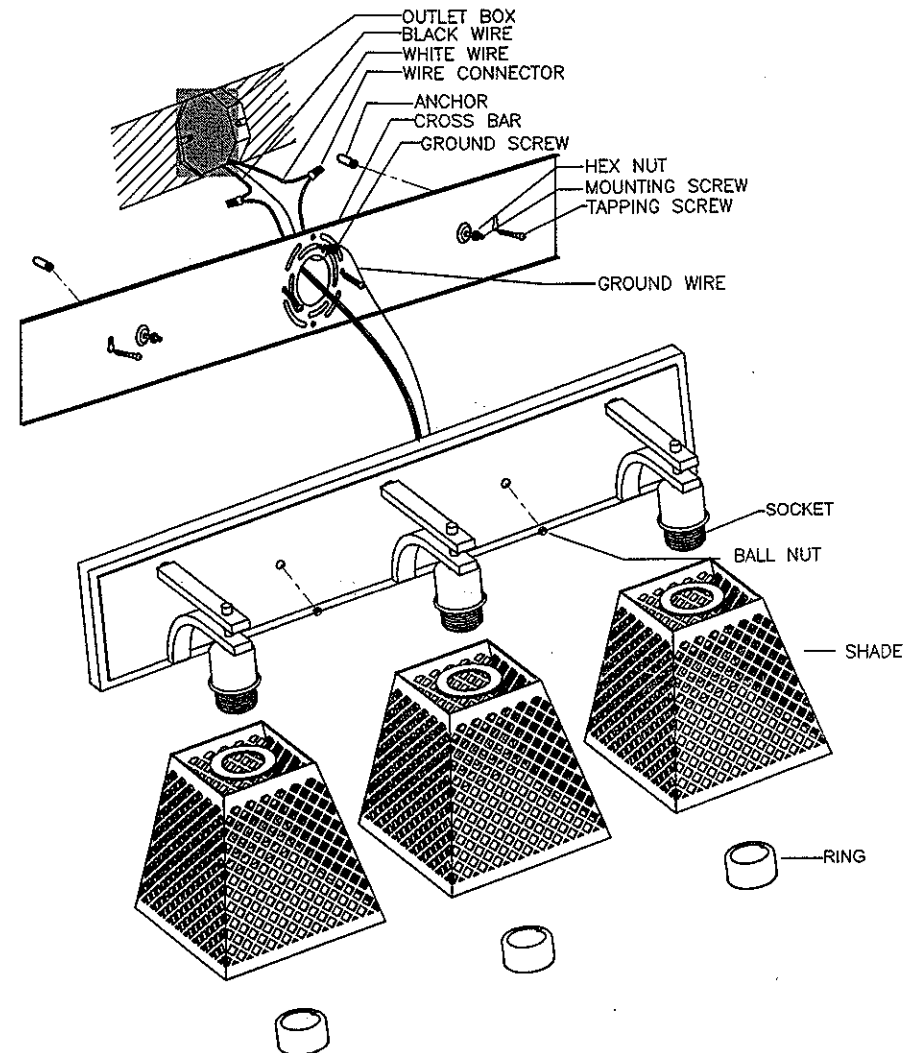

**INSTALLATION IS NOW COMPLETED.**