


Corner Floor Lamp User Guide

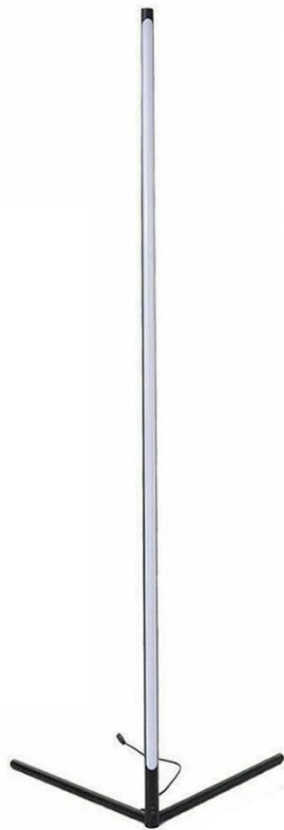


Safety Instructions

Read and follow all the safety instructions:

- The lamp is not waterproof. Avoid exposing it to splashing or dripping water.
- The operating temperature should be within -10° to 40° (14° to 104°F).
- The lamp's internal light source cannot be replaced. If it breaks, you must replace the lamp.
- Do not allow children to install the lamp alone.
- Avoid placing the lamp near heat sources.
- Do not install the lamp with a dimming driver.
- Avoid placing the lamp near potentially dangerous sources (e.g., candles, liquid-filled objects).


INTRODUCTION

Thanks for choosing EP Light's corner lamp. This floor lamp creates a soft, cozy atmosphere in your home with its wide range of choices from warm white, cool white and 16M kinds of colors. You can also select from different scene modes from our remote to achieve a unique addition to your space.

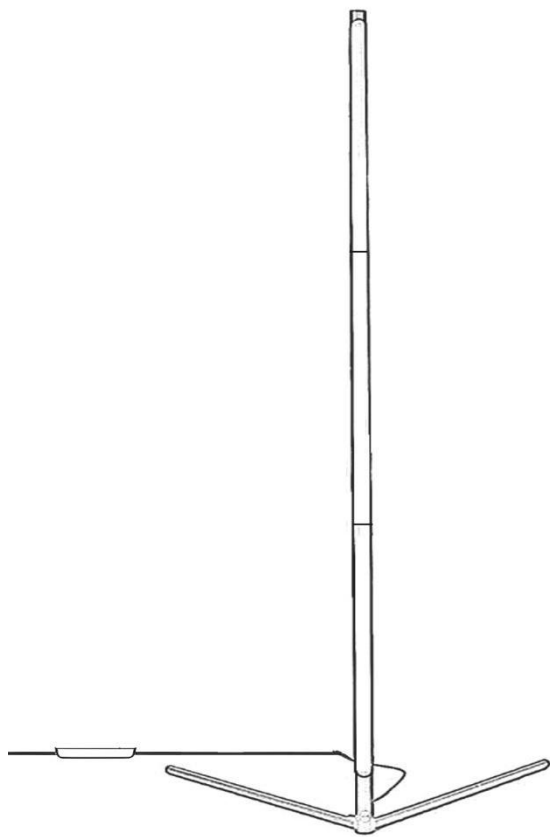


WHAT'S IN THE BOX

Pole B (with 4 Holes)

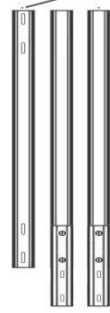

Pole A

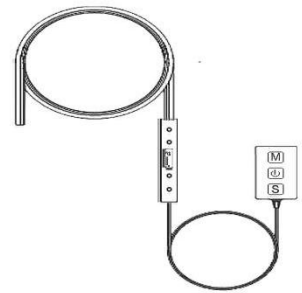

Silicone Strip Light with Power



Base A



Base B



Remote




Cap



Crosshead screws



Screwdriver



Adapter



**Set Screws
(Hexagonal)**




Allen Wrench

Installing Steps

1. Connect pole A and Pole B with the connecting piece. Align its metal slots with the holes of the connecting piece. Tighten the screws with the screwdriver till the connecting piece can't move.


1

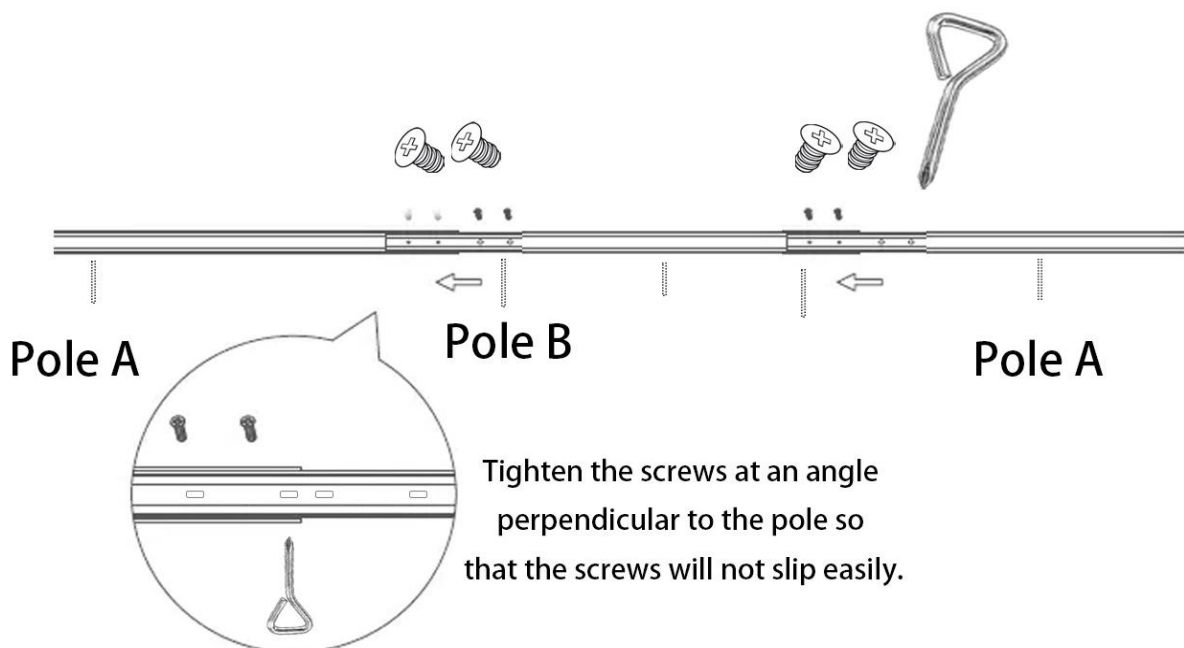

2. Press the silicone strip into the metal pole.

Note: To avoid deforming the silicone light strip, please press the silicone strip from the bottom of the silicone strip at the position of 1 inch length (the position of the chip) first, and then push the reserved length of 1 inch towards the direction of the metal pole, so that the bottom of the silicone strip is flush with the bottom of the metal pole, and then press it towards the top direction. **Caution:** Do not cut the strip.


3. Connect the black tube attached to the silicone strip to the metal pole.

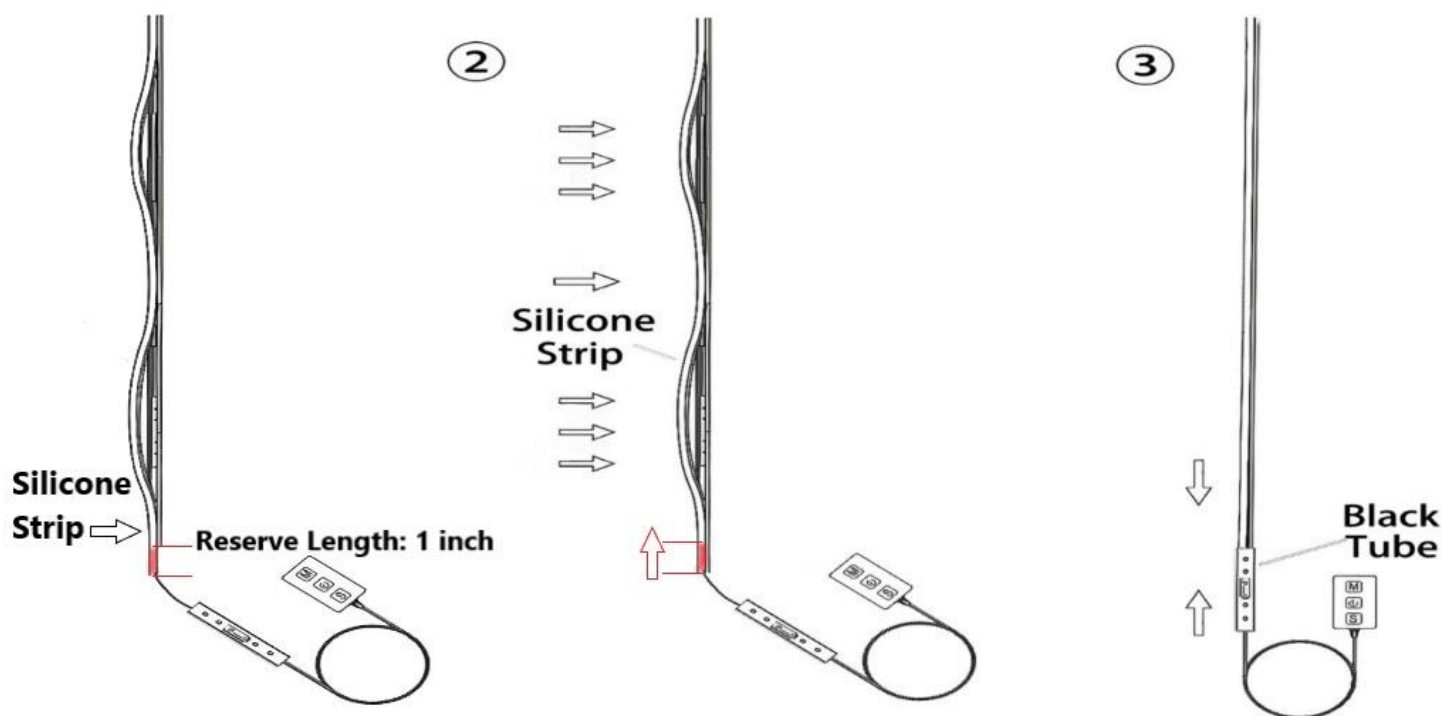


4. Install the base by connecting base B to base A, and then use an Allen wrench to tighten the set screws. **Note:** There are no screw holes on the base B. Just tighten the set screws to the maximum.

5. Connect the assembled part to the base. **Note:** You can change the direction of the lamp, whether facing the wall or not, by rotating the black tube below.


④

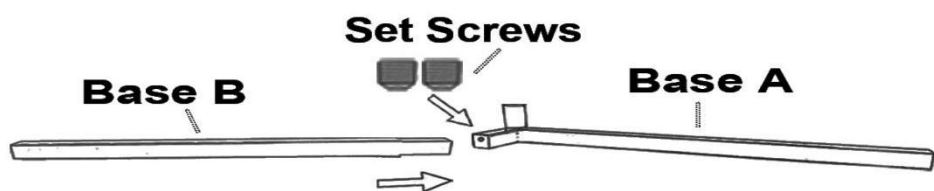

Note: No screw hole on Base B.
Just tighten set screws to the maximum.

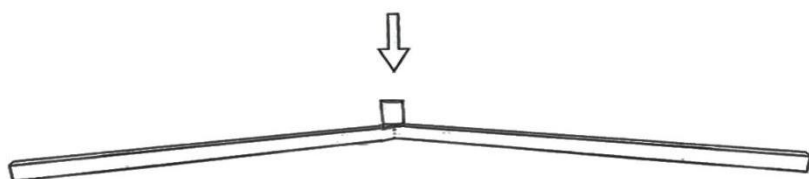


⑤

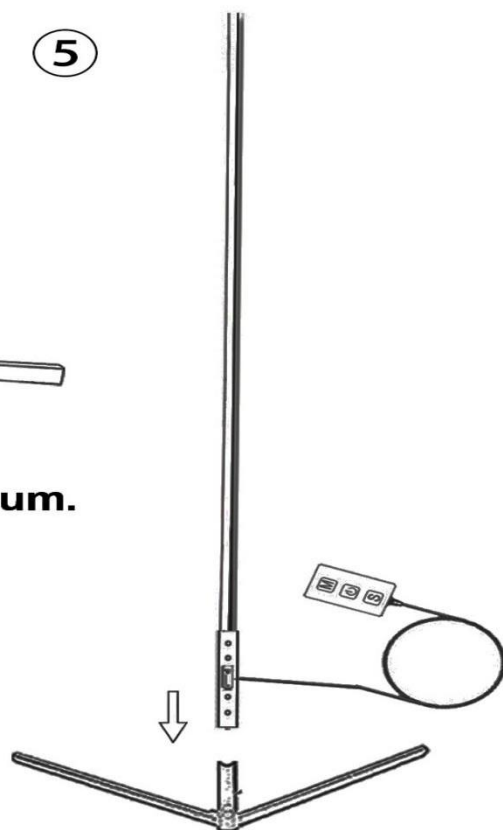

6. Tighten the securing screw at the connection point between the base and the lamp body. Place the cap on top of the lamp.

7. Connect the adapter to the cable of the lamp and plug the adapter into a power outlet.

⑥

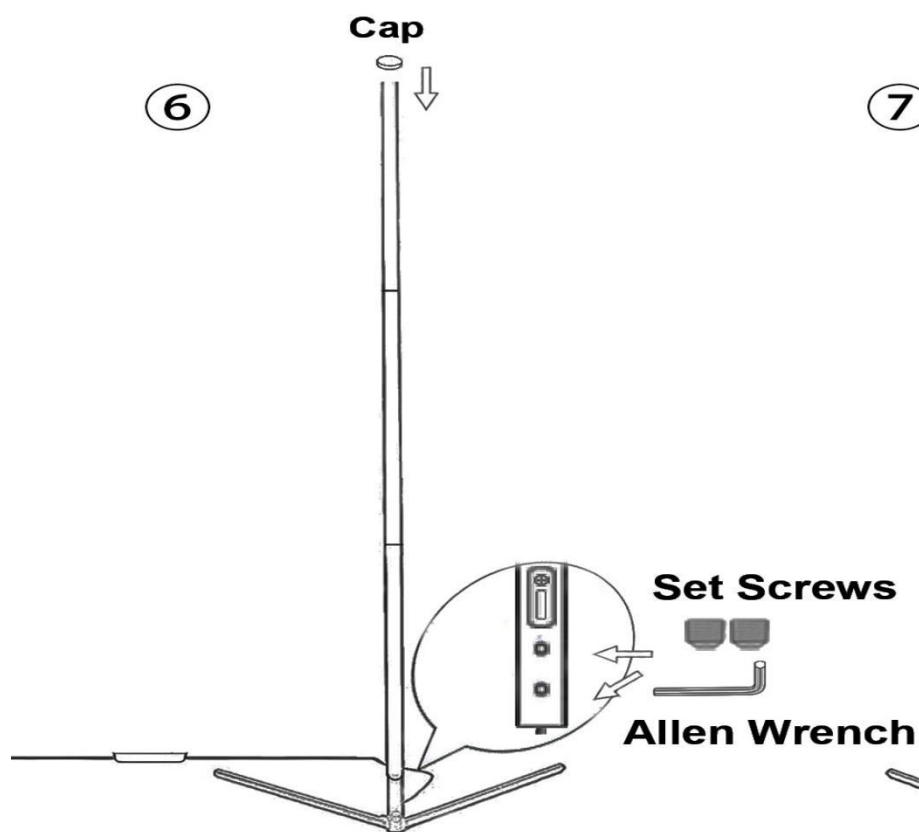

⑦

