



# RiverBath® | K-1360-H2

75" x 45" drop-in heated whirlpool bath

## Features

- Four Riverjets and eight hydromassage jets can be individually adjusted for water flow and direction
- Two variable-speed pumps for adjusting massage intensity
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood
- Built-in heater
- Lighted keypad control
- Floating remote control
- Spacious design accommodates up to two bathers
- Integral fill with factory-installed faucet valves
- Drilled for grab bars (required); sold separately
- Requires jet trim kit (sold separately)
- Three pillows provide extra comfort
- Integral lumbar support



DISCONTINUED



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-29-2026 21:27 - US-CA

THE BOLD LOOK  
OF **KOHLER**

## Codes/Standards

ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2  
cUL Listed  
UL Listed

## Technical Information

*All product dimensions are nominal.*

|                      |                              |
|----------------------|------------------------------|
| Lighting Included:   | Yes                          |
| Drain Location:      | Center                       |
| Drain Hole Diameter: | 2-1/4" (57 mm)               |
| Basin Area, Bottom:  | 46" x 34" (1168 mm x 864 mm) |
| Basin Area, Top:     | 57" x 37" (1448 mm x 940 mm) |
| Water Depth:         | 20" (508 mm)                 |
| Water Capacity:      | 149 gal (564 L)              |
| Minimum Floor Load:  | 62 lbs/ft <sup>2</sup>       |
| Weight:              | 215 lbs (97.5 kg)            |

## Material

- Acrylic

## Recommended Products/Accessories

K-23726 Drain treatment  
K-23732 Tub & shower cleaner

## Required Products/Accessories

- K-T37392 Rotary-turn bath drain trim
- K-T37391 Rotary-turn bath drain trim
- K-T9540-4 Deck-mount trim for transfer valve/vacuum breaker with lever handle, valve not included
- K-78439 45" cable bath drain
- K-37385 Rough-in cable drain, PVC, 45" cable, less horizontal tube
- K-9669 Grab bars
- K-9398 Whirlpool trim kit

## Required Electrical Service

Two dedicated circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

|             |                       |
|-------------|-----------------------|
| Pump, Pump: | 240 V, 20 A, 50/60 Hz |
| Heater:     | 240 V, 20 A, 50/60 Hz |

## Electrical Component Ratings


|                   |                               |
|-------------------|-------------------------------|
| Pump:             | 240 V, 9 A, 50/60 Hz          |
| Number of Speeds: | Variable                      |
| Pump:             | 240 V, 9 A, 50/60 Hz          |
| Number of Speeds: | Variable                      |
| Heater:           | 240 V, 17 A, 50/60 Hz, 4000 W |

## Warranty

*See website for detailed warranty information.*

KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty|KOHLER® Hydrotherapy Components Five-Year Limited Warranty



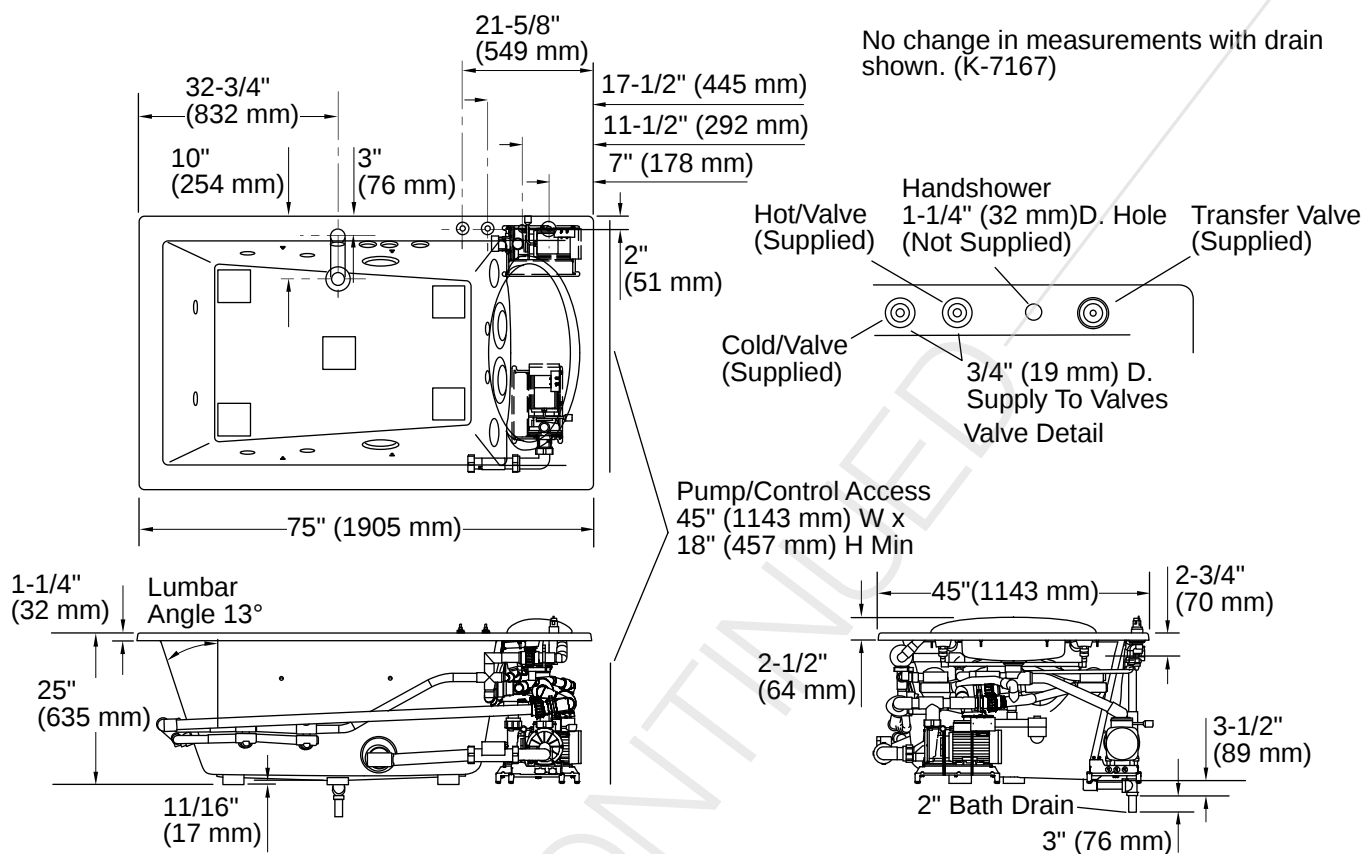

## Installation

- Drop-in
- Center drain

## Installation Notes

*Install this product according to the installation instructions.*

Measure your actual product for rough-in details.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Consult local and national codes for minimum air gap requirements when installing a spout on the faucet deck other than that supplied.

