

# Instruction Sheet

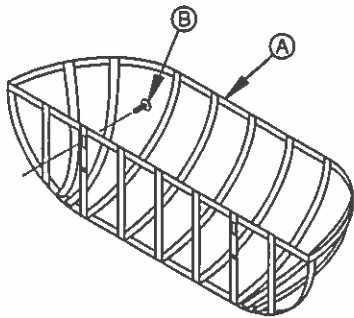


Illustration #1

## Parts included:

- A. 1
- B. 10 Screws
- C. 10 Self-locking Nuts
- D. 2 Short Brackets
- E. 2 Long Brackets

## Assembly Instructions

(Tools Required- Not Included)

HINT: Nuts should always be on opposite side of wood rail.

HINT: Since the nuts (C) are self-locking, it will save time using a screwdriver to hold the screws when unscrewing the nuts.

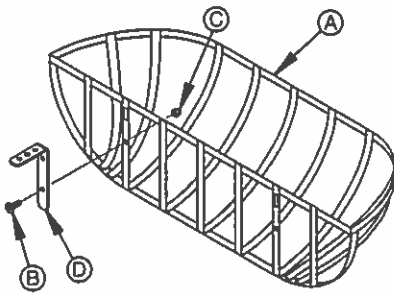


Illustration #2

1. If the trough (A) is to be mounted on wall, always use proper anchors depending on your material. Please note you will need to remove the included screws (B) to mount flush on a wall.

See Illustration #1 for wall-mounting.


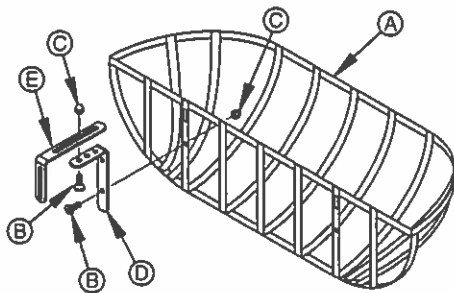


Illustration #3

2. If mounting trough over a fence or deck rail, you will need to mount bracket (D) to the back of the trough (A) with the four screws (B) included with the trough (A), as shown in Illustration #2. You will then need to mount the second bracket (E) to the first using the included screws (B). See illustrations 2 and 3.

**NOTE:** Use the short end of the enclosed bracket (E) for 2- 4"(5.8-10.16 cm) railings, and use the long end for 4.5-6"(11.43-15.24 cm) railings.

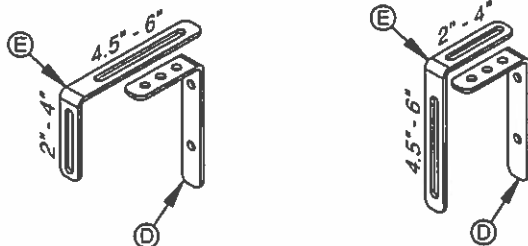

Optional Mountings