


PRODUCT NAME: 5LT Pendant

Please consult your electrician for hanging fixture and wiring.

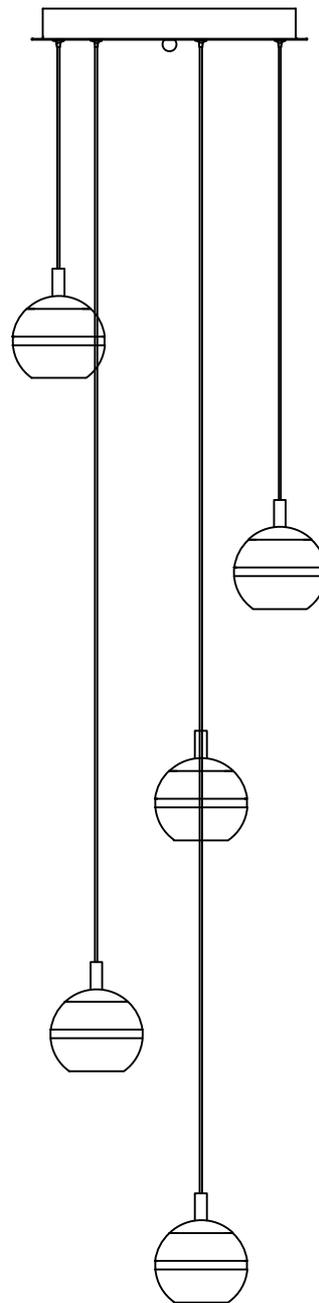

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.
Below is a list of recommended dimmers:
Lutron MACL-153M
Lutron DVL-153P
Lutron SCL-153P
Leviton IPL06-10Z
Leviton 6674-POW
Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

Bulbs (Included):5*LED*6W


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation



Bracket (A)



Screws(B)




Canopy(C)




Ball Nuts(D)

Locate all hardware & components before discarding packaging

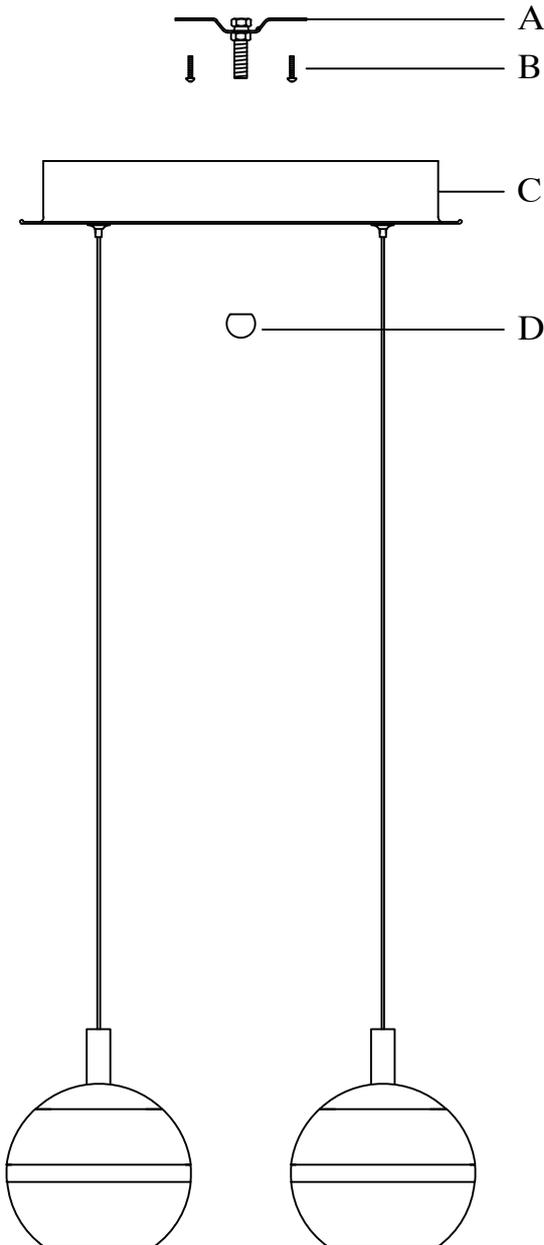


1.)

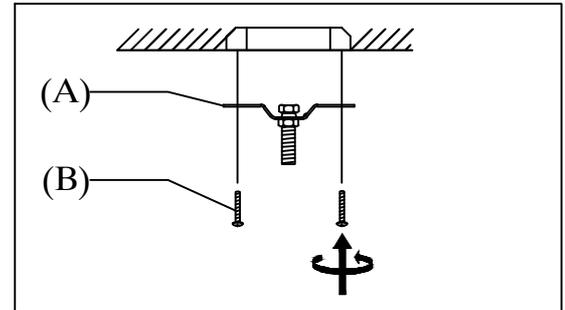


Step1 :Remove mounting bracket from fixture and install to electrical box.

2.)

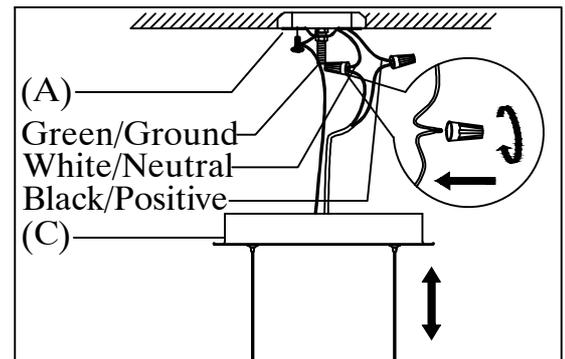

Step2 :Adjust wire length to desired mounting height, and tighten strain relief screws to secure. Wire fixture to wires in outlet box. Green wire is for Ground.

3.)

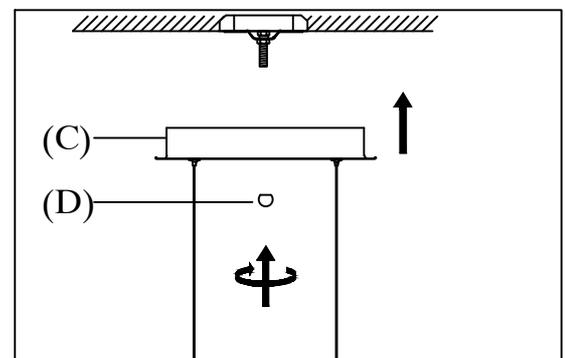

Step3 : Install fixture to bracket and Ball Nuts at the ends of the canopy to secure.

Cleaning & Care:

Clean with soft cloth and a mild detergent.
Do not use abrasive cleaner.