

artos[®]

F701-4

INSTALLATION GUIDE

safire in wall lav faucet

BRUSHED NICKEL(BN)



CHROME(CH)



artos[®]

F701-4

OPERATING SPECIFICATIONS

safire in wall lav faucet



FEATURES

Integrated Control

OPERATING PRESSURE

Minimum: 15 psi

Maximum: 75 psi

Above 90psi it may be necessary to install a pressure reducer

OPERATING TEMPERATURE

Maximum: 176°

FLOW RATE

1.2 USGPM

APPROVALS





artos[®]

F701-4

PRODUCT DIMENSIONS

safire in wall lav faucet

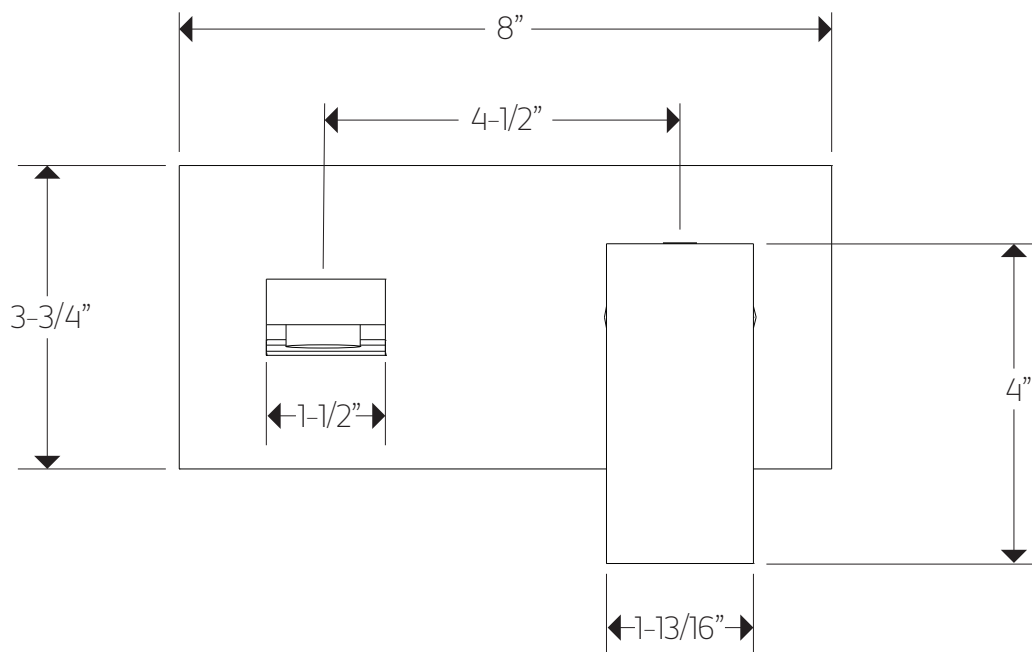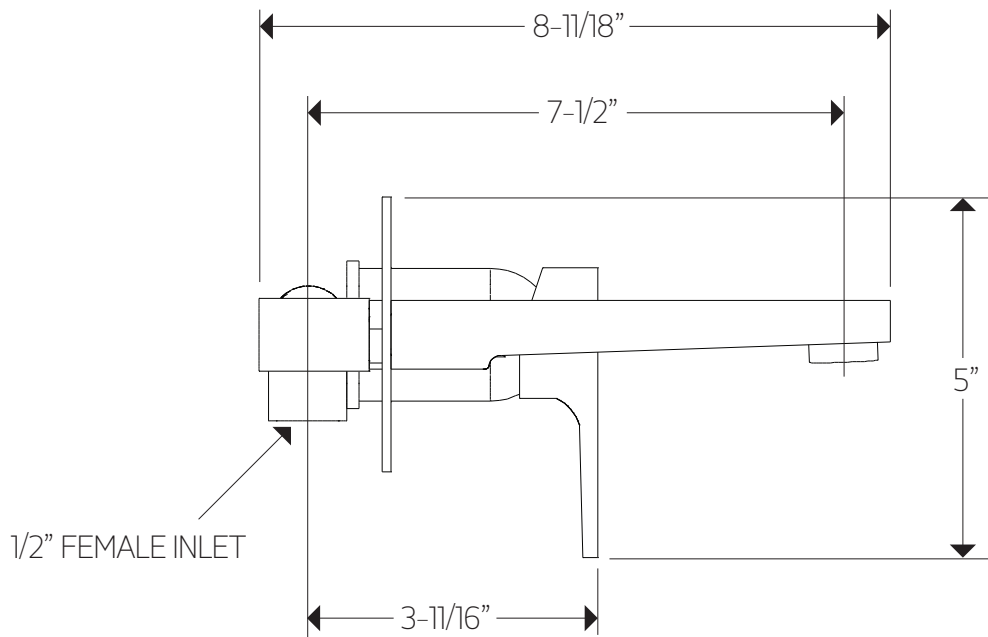


artos[®]


F701-4

safire in wall lav faucet

STEP 1

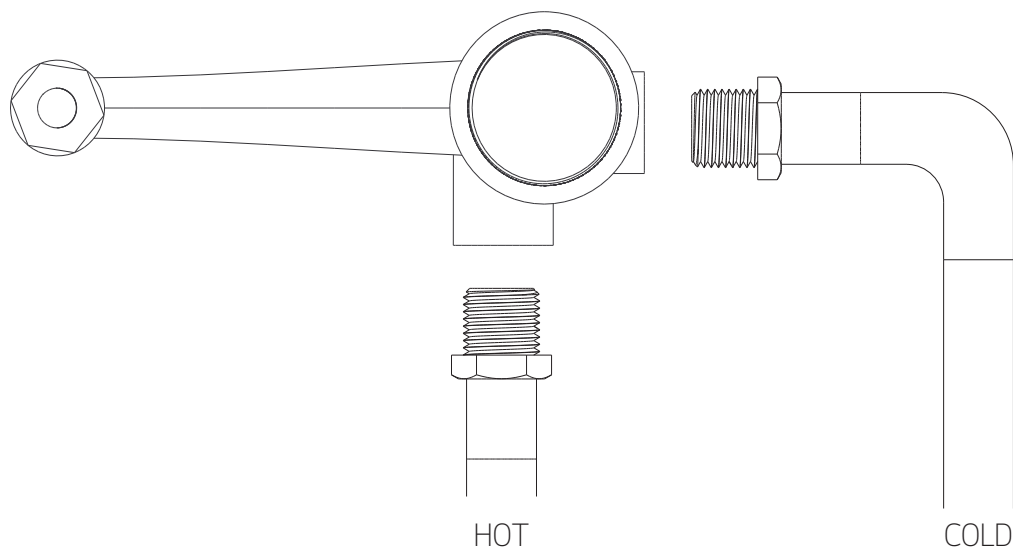


STEP 2

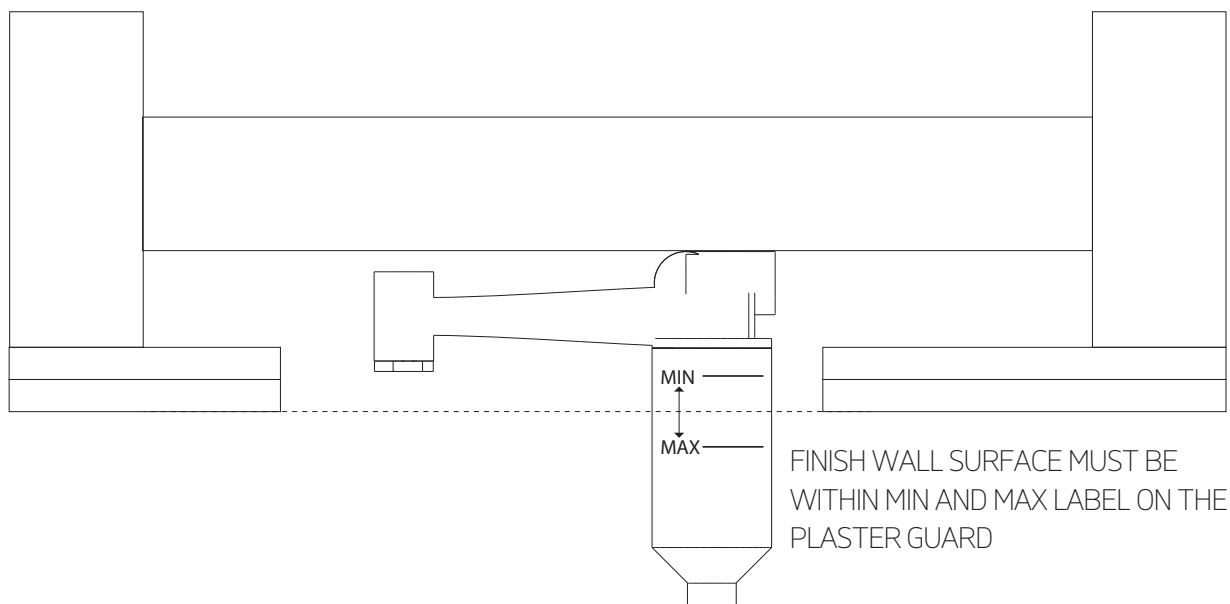


INSTALLATION STEPS

STEP 3

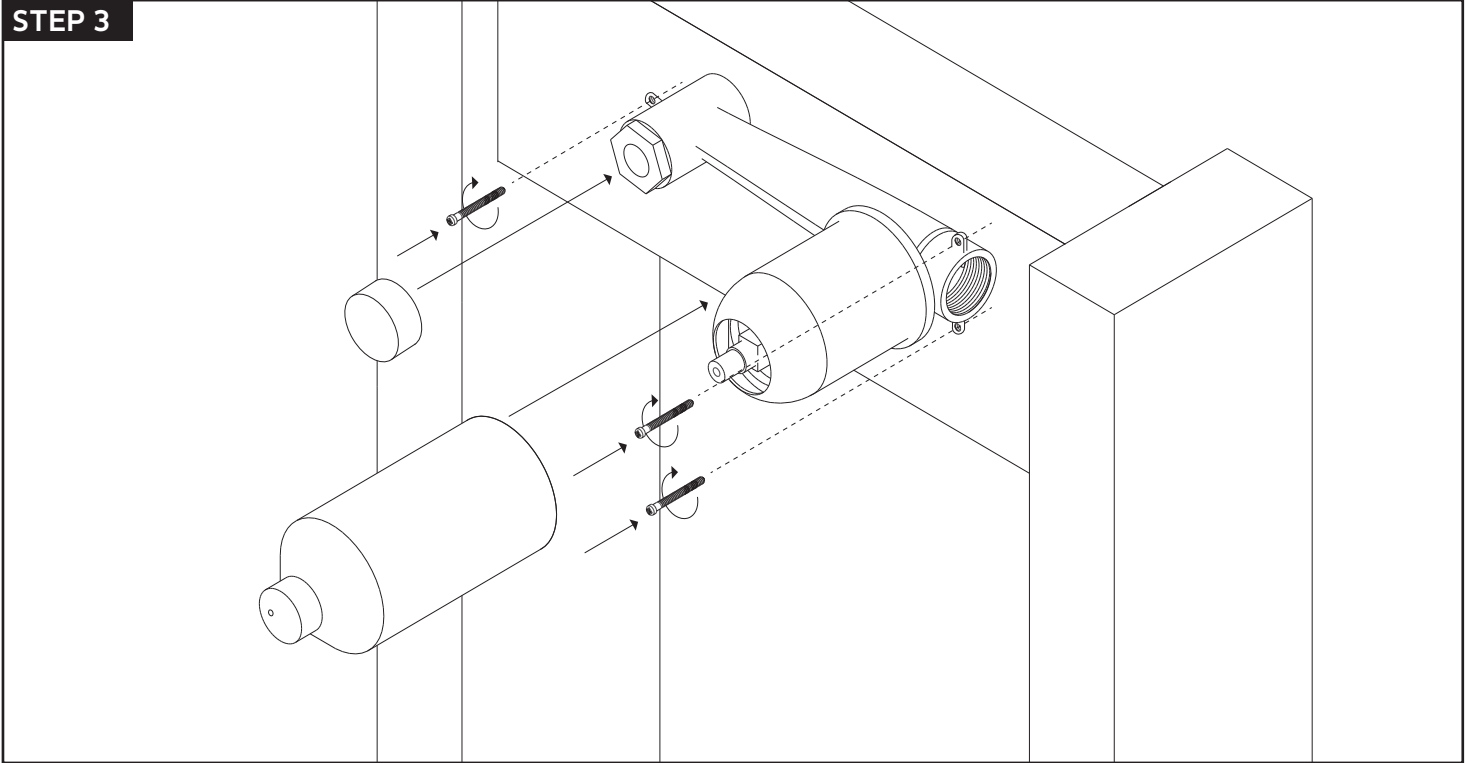

STEP 4

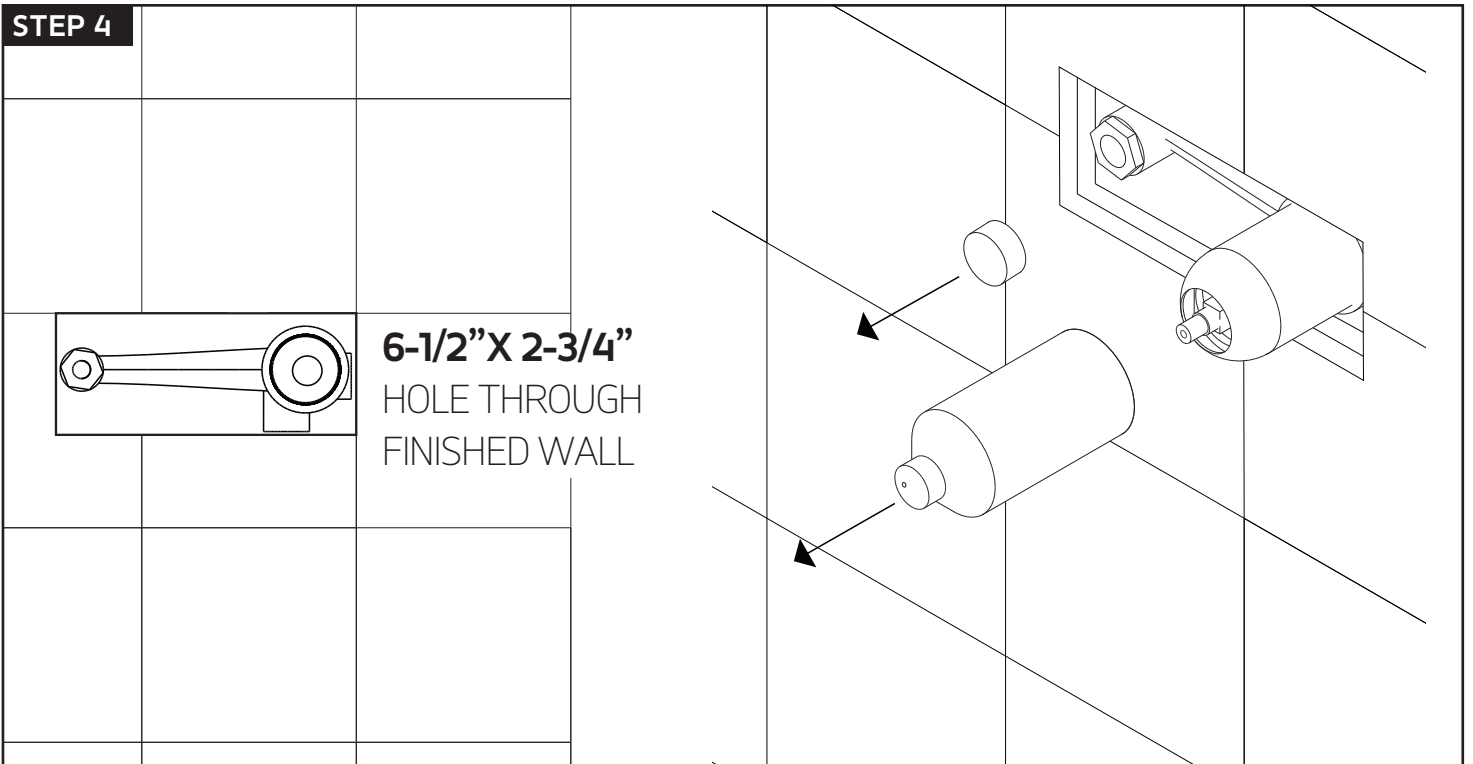


artos[®]


F701-4

safire in wall lav faucet

STEP 5

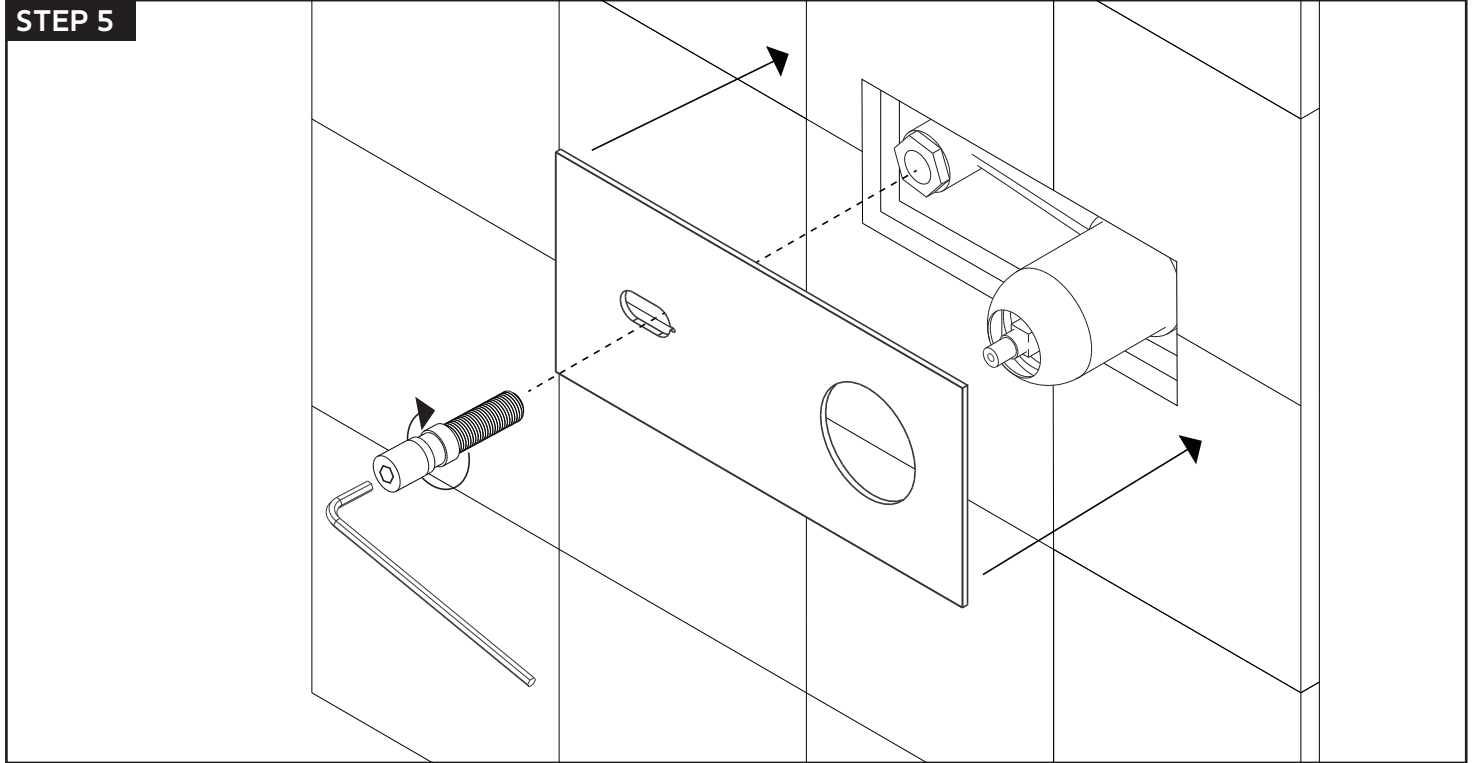



STEP 6

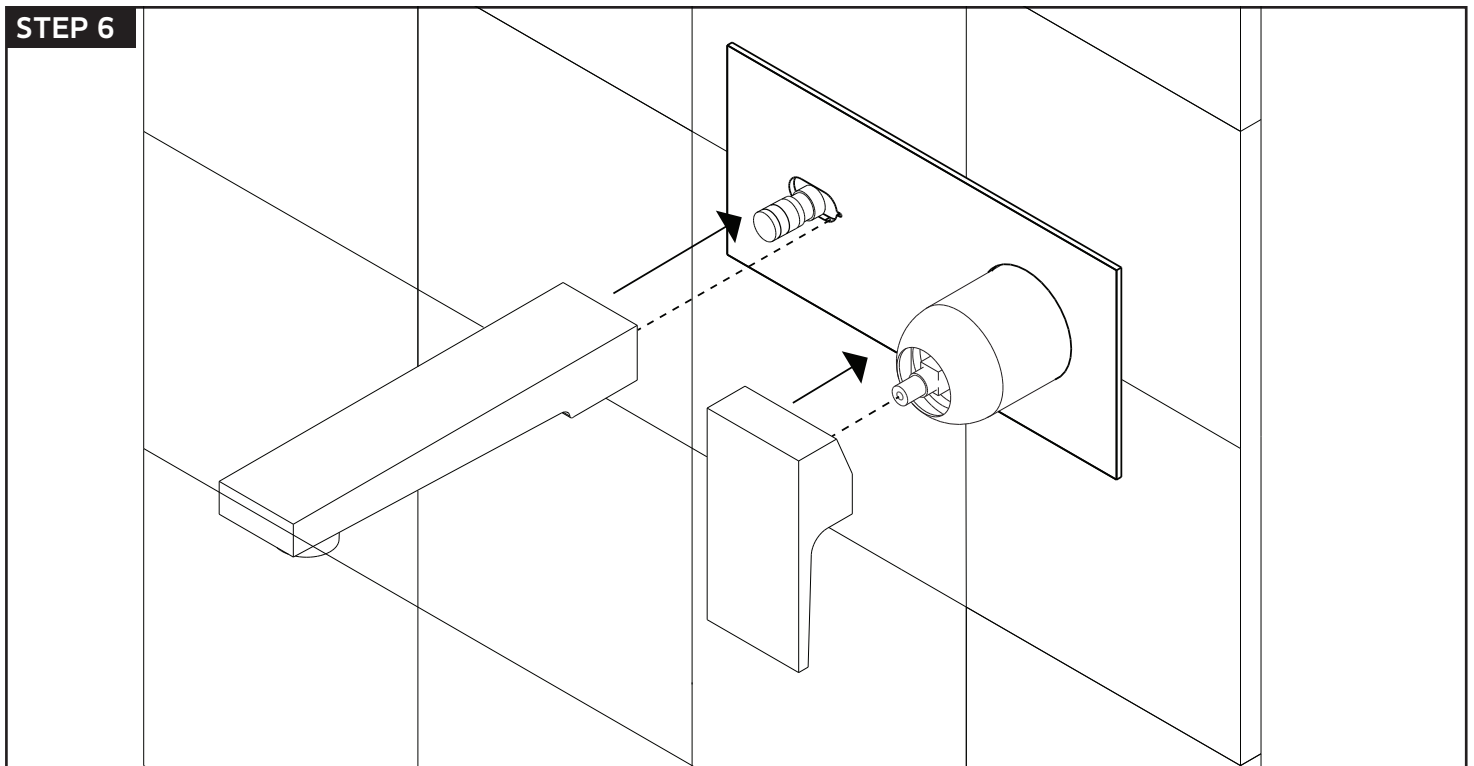

INSTALLATION STEPS

STEP 7

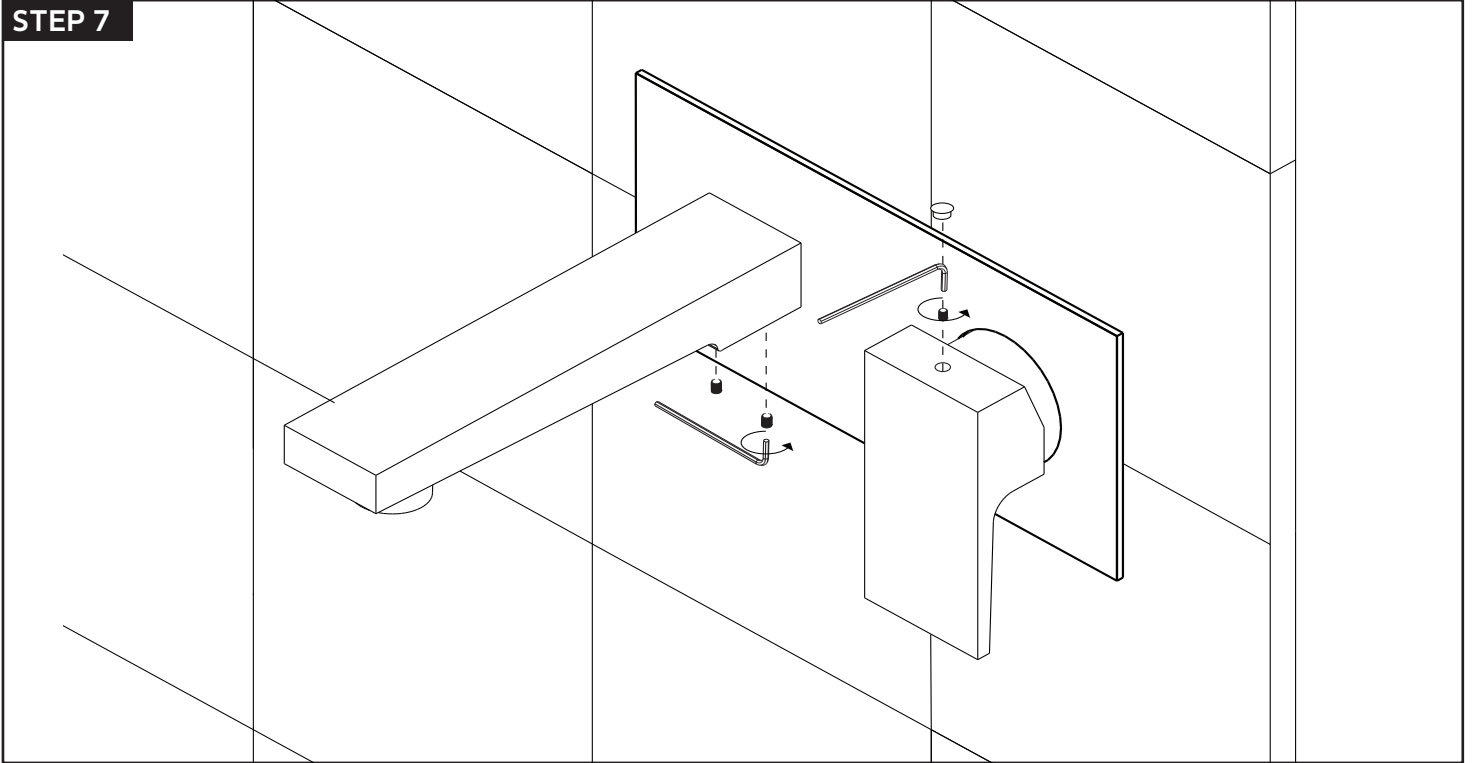

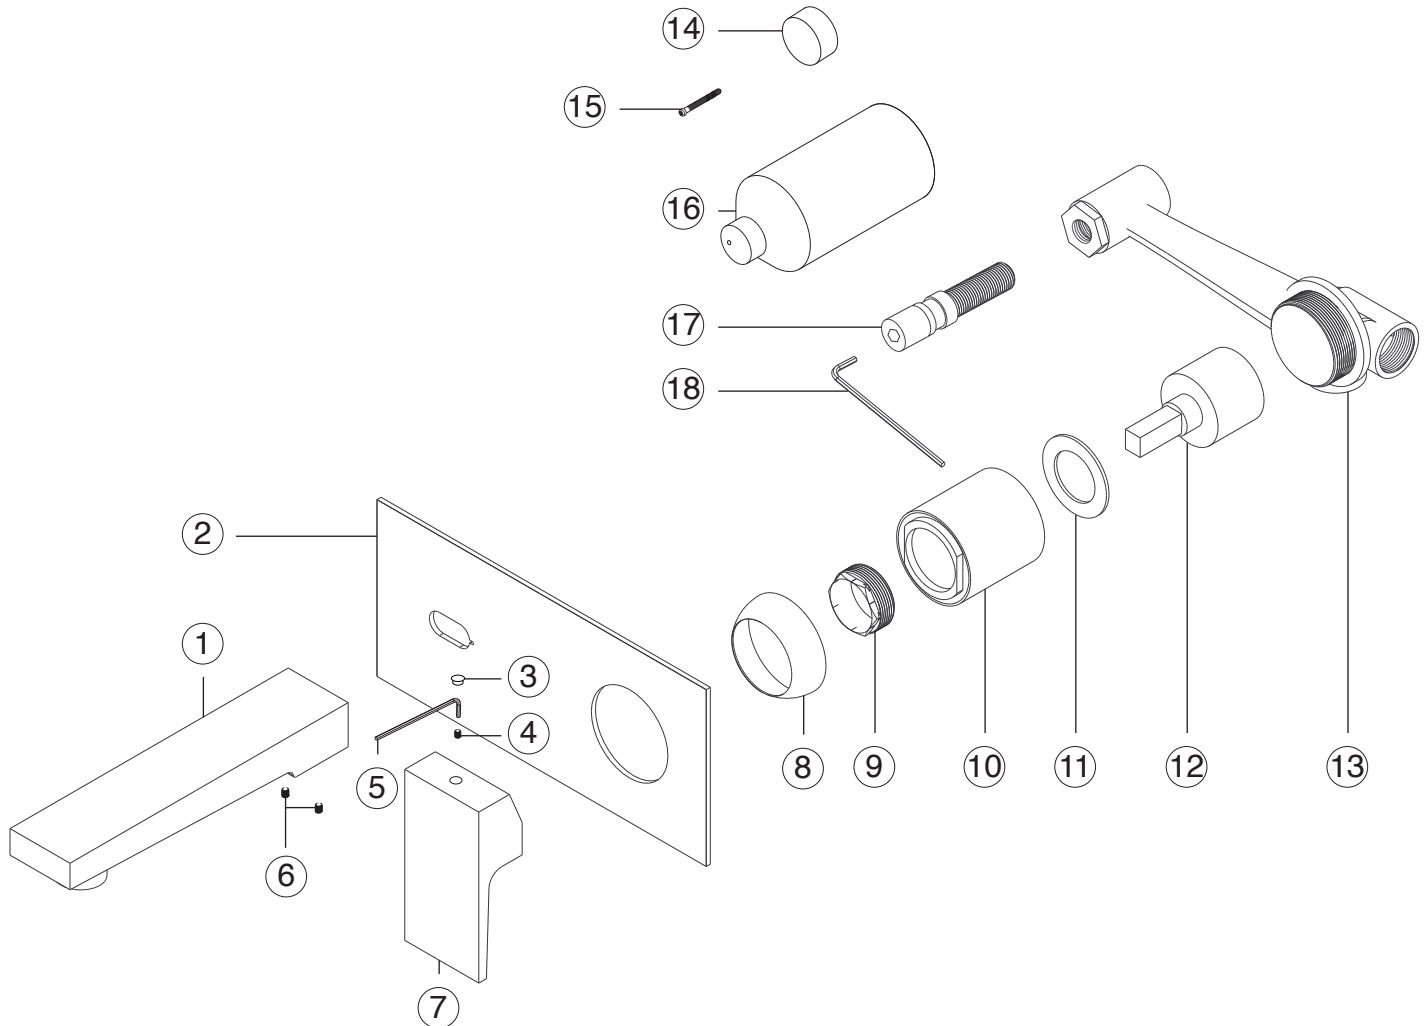

- | | |
|--------------------------------------|--|
| ① FAUCET SPOUT F701-4 XP1 | ⑩ CARTRIDGE HOUSING F701-4 XP10 |
| ② ESCUTCHEON PLATE F701-4 XP2 | ⑪ CARTRIDGE GASKET F701-4 XP11 |
| ③ FAUCET HANDLE CAP F701-4 XP3 | ⑫ CARTRIDGE F701-4 XP12 |
| ④ FAUCET HANDLE SET SCREW F701-4 XP4 | ⑬ VALVE BODY F701-4 XP13 |
| ⑤ ALLEN WRENCH F701-4 XP5 | ⑭ SPOUT PLASTER GUARD F701-4 XP14 |
| ⑥ SPOUT SET SCREWS F701-4 XP6 | ⑮ VALVE MOUNTING SCREWS(3) F701-4 XP15 |
| ⑦ CONTROL HANDLE F701-4 XP7 | ⑯ HANDLE PLASTER GUARD F701-4 XP16 |
| ⑧ DRESS RING F701-4 XP8 | ⑰ SPOUT STEM F701-4 XP17 |
| ⑨ CARTRIDGE SECURING NUT F701-4 XP9 | ⑱ SPOUT STEM ALLEN WRENCH F701-4 XP18 |

For best results, keep the following in mind to retain the high quality finish of your artos® faucets:

- Use a soft, dampened sponge or cloth. On no account should you use an abrasive material such as a brush, scouring pad or steel wool to clean surfaces.
- Test your cleaning agent solution on an inconspicuous area before applying to the entire faucet.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaning agent.
- An ideal cleaning technique is to rinse faucet thoroughly and blot dry any water from the surface after each use.

LIMITED LIFETIME WARRANTY

Artos® Limited Lifetime Warranty

Artos® faucets have been manufactured under the highest quality and manufacturing standards. Artos® faucets are guaranteed for life against leaks and manufacturing defects for as long as the original consumer purchaser owns it. This warranty applies to installations in the US, Canada and Mexico (North America). Commercial, Industrial or business uses are warranted for a period of one year from the original date of purchase.

This warranty is non-transferable and applies exclusively to the original owner or end-user. If a defect is found during normal use, Artos® will, at its election, repair, replace or make an appropriate adjustment. Damage caused by accident, misuse, abuse, improper installation or alteration will void the warranty. This warranty does not cover replacement parts where damage is caused by normal wear and tear. Labor charges, installation or other incidental or consequential costs will not be covered.

Replacement parts that qualify for warranty repair can be obtained by contacting Artos® at 1-877-9ARTOS9 or by e-mail at info@artos.us.com. Proof of purchase (original sales receipt) from the original consumer purchaser must accompany all warranty claims. When submitting your claim in writing, please provide your name, address and telephone number.

Please register this product online at WWW.ARTOS.US.COM

Item No : **F 7 0 1 - 4**
Serial No :