


# ASSEMBLY INTRUCTION


## 4 Foot Bench

### IMPORTANT NOTE

- BEFORE BEGINGNING ASSEMBLY, check that the quantities of the parts received match those on the parts list below. Carefully remove all the parts from the carton and put them individually on a soft cloth to prevent scratches or orther damages occuring to the wood part.
- DO NOT TIGHEN UP ALL THE BOLTS UNTIL EACH PART IS PROPERLY ASSEMBLED
- TOOL REQUIRED: Hex Wrench (provided)
- You should keep Hex Wrench in the safe place as you may need to tighten up the Head Cap Bolts periodically in the future.

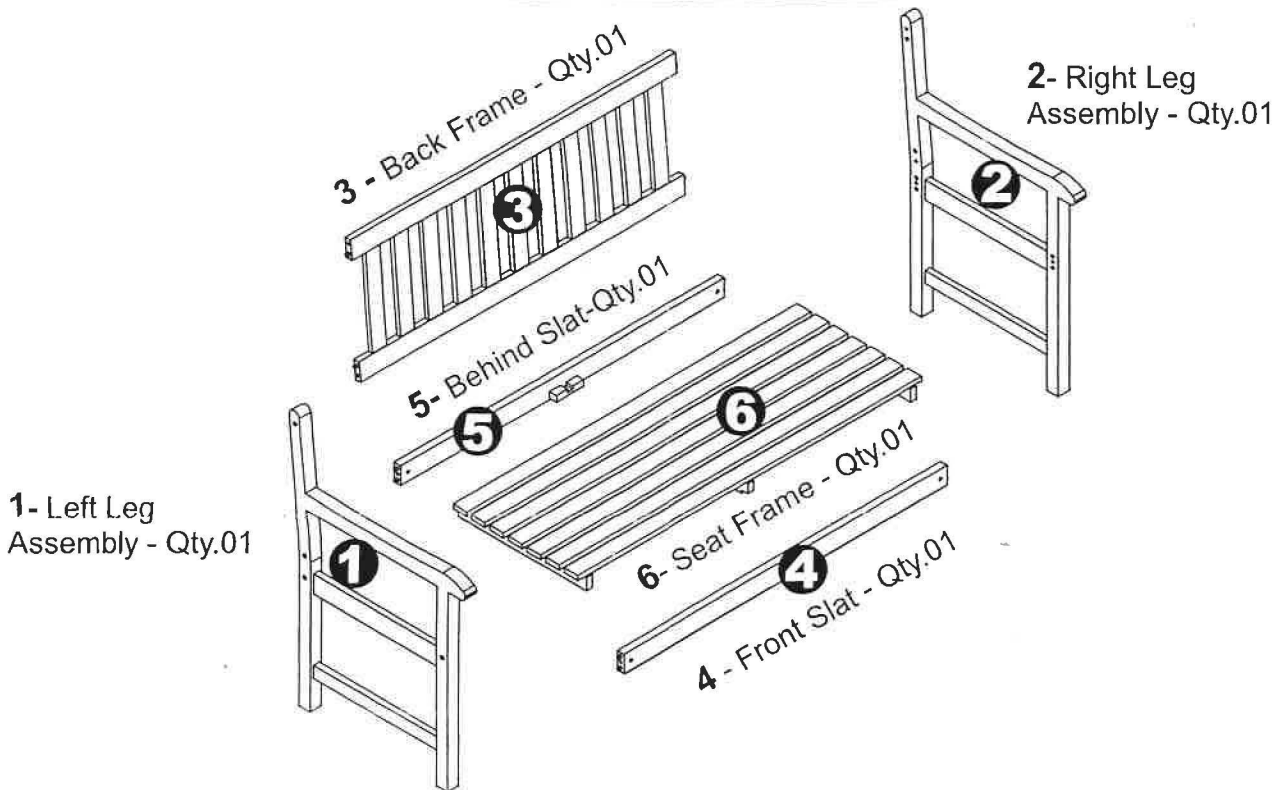


### HARDWARE




A - 70 mm Hex Bolt - Qty. 08




A - Barrel Nuts - Qty. 08



B - 30 mm Screw - Qty. 04

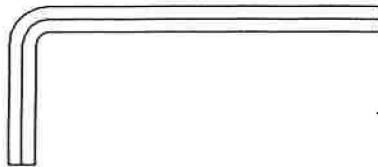

C - Hex Wrench - Qty.02



# ASSEMBLY INTRUCTION

## 4 Foot Bench




DO NOT TIGHTEN UP ALL THE SCREWS UNTIL EACH PART IS PROPERLY ASSEMBLED

### STEP 1

1 - Attach Back Frame, **Front Slat** and **Behind Slat** into Right Leg and Left Leg at stand up possition by **8 Hex Bolt (A)** as shown.




- Remember to use a **hex wrench** to hold **barrel nut** and keep it balanced into pre-drilled holes while connecting with bolt

- Please not to tighten so much.

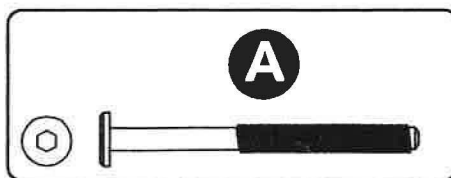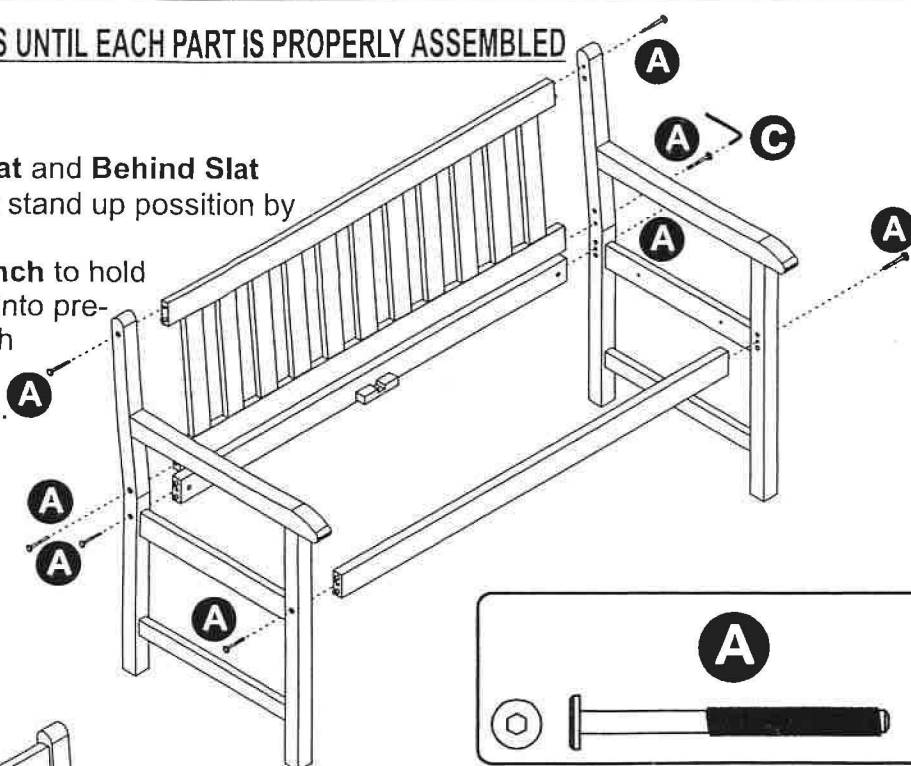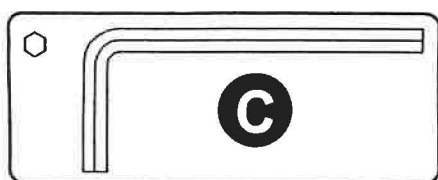

### STEP 2

2 - Attach and Screw Seat Frame into both Legs by 4 Screws (B) at ready-made holes under Seat Frame.

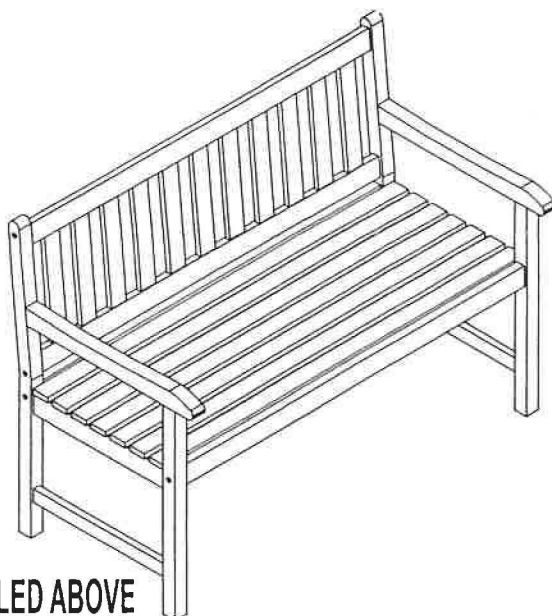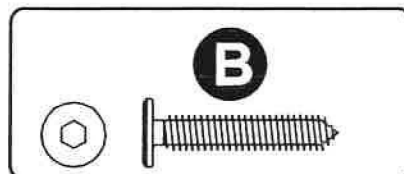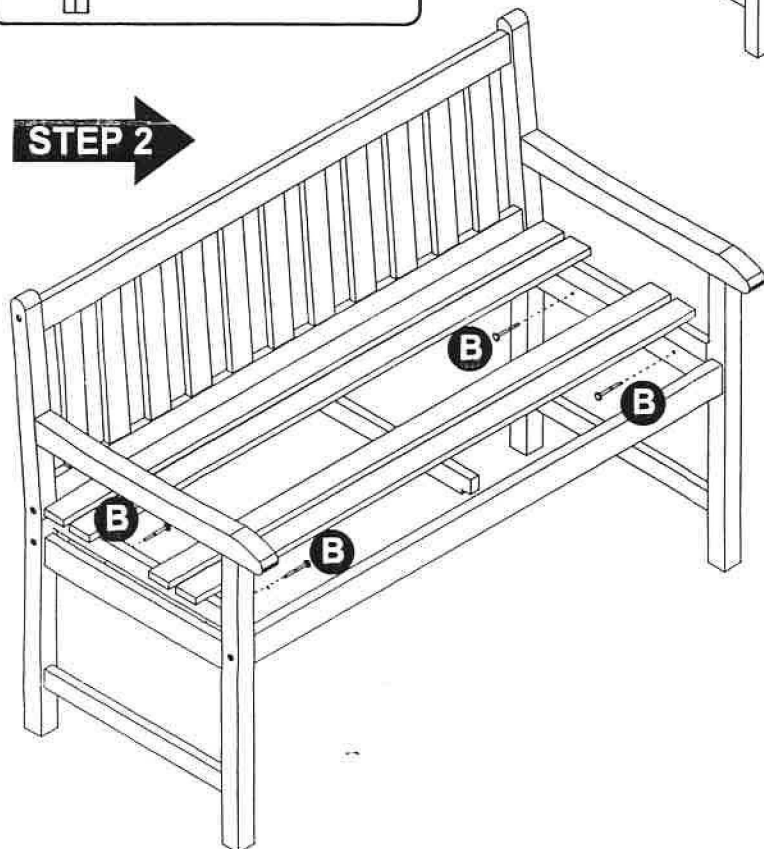

FINALLY TIGHTEN CAREFULLY ALL BOLTS AND SCREWS OF ASSEMBLED ABOVE

**Be sure to tighten all Bolts before use**