



Triton® Bowe® Cannock™ | K-730T70-4AR

Wall-mount service sink faucet, 12 gpm

Features

- Two-handle gooseneck bathroom sink faucet
- 3-11/16" (94 mm) gooseneck spout with rosespray
- 7-5/16" (186 mm) wall-to-spout outlet
- 12 gpm (gallons per minute) maximum flow rate
- Lever handles with red/blue indexing (ADA-compliant with correct installation)
- Less drain
- Adjustable flanges
- External NPT connections



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-----------------------|
| CP | Polished Chrome |
| SR | Vibrant Bright Nickel |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-14-2026 11:06 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 372

NSF/ANSI/CAN 61

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 3-11/16" (93 mm)

Flow Rate

Faucet Flow Rate: 12 gpm (45.4 l/min)

Valves

Included Valves: Ceramic disc, Thermostatic,
Volume Control

Material

- Brass
-

Recommended Products/Accessories

K-23723 Faucet cleaner

K-3200 36" wall-mount utility sink

K-3202 48" wall-mount utility sink

K-3203 60" wall-mount utility sink

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-14-2026 11:06 - US-CA

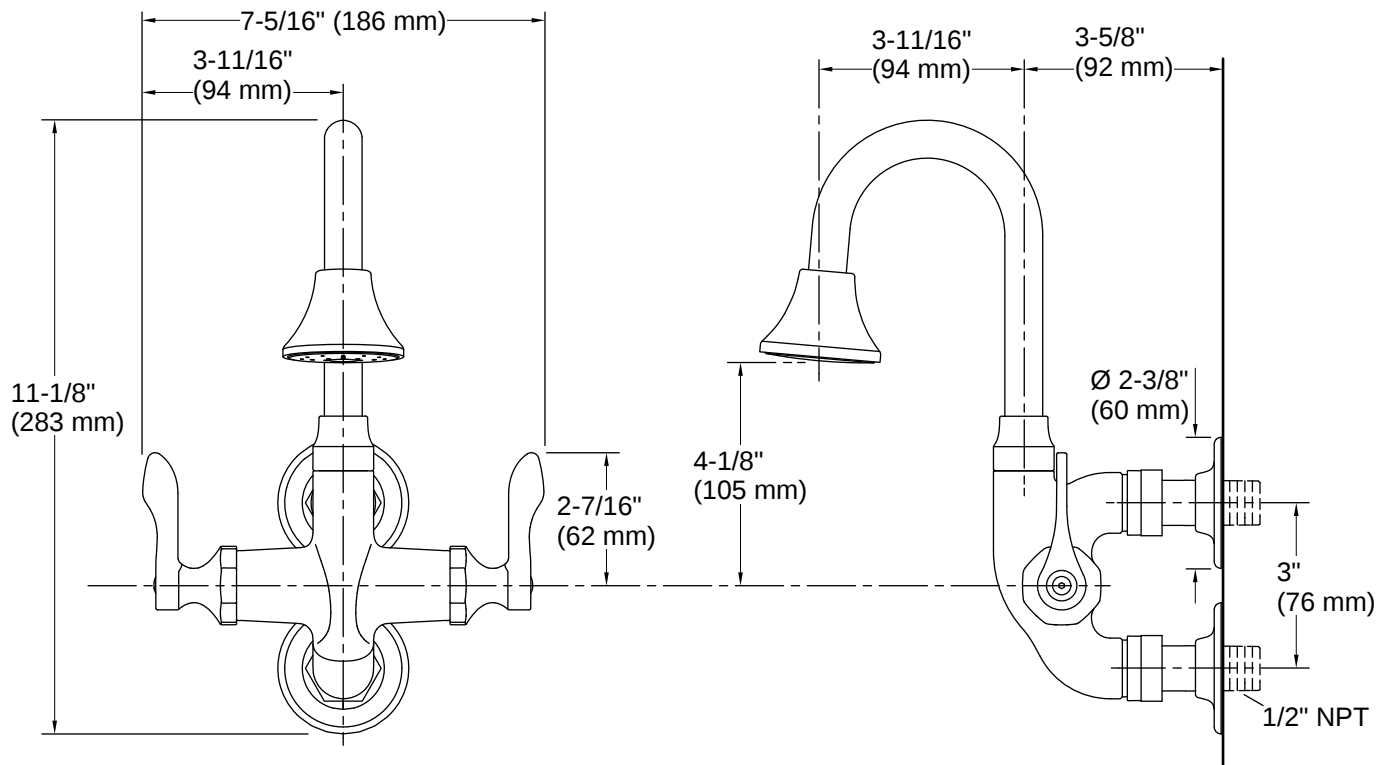

Installation

- Pairs with the Brockway wall-mounted wash sink

Installation Notes

Install this product according to the installation instructions.

