### **CARE AND MAINTENANCE**

Store outdoor furniture indoors or cover well when not in use. Remove wooden furniture from standing water. Dust regularly with small brush or vacuum Spills should be taken care of immediately before they harden or stain with a slightly dampened sponge.

## **NOTICE**

- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* This item may require periodic tightening

Weight Capacity: 275 lbs (single seat)

550 lbs (two person seat)


Warning: Do not stand on bench


Warning: Do not over torque bolts/screws







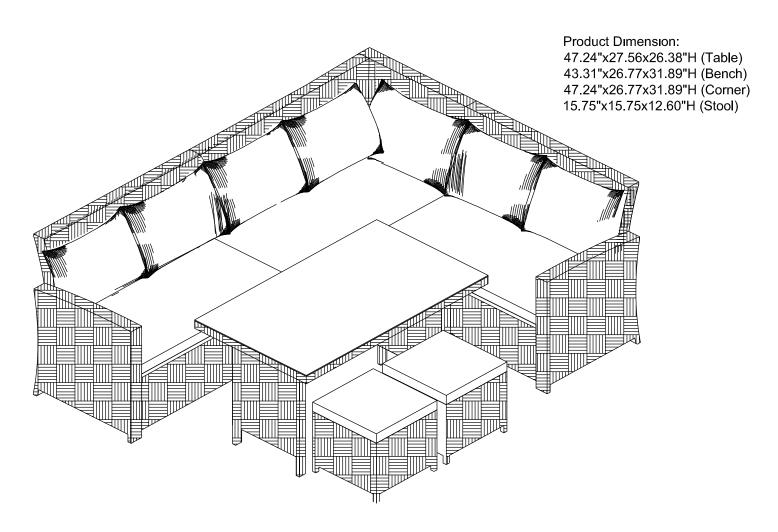

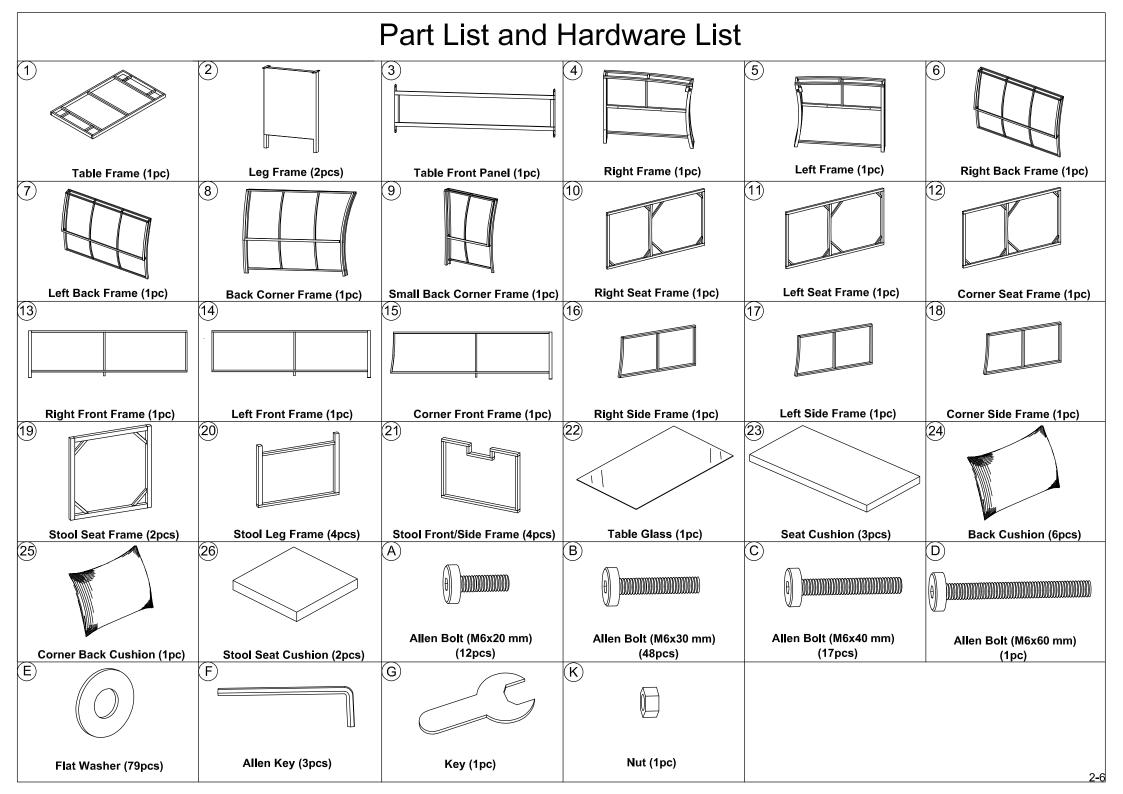

#### **CARE AND MAINTENANCE**

Store outdoor furniture indoors or cover well when not in use. Remove wooden furniture from standing water. Dust regularly with small brush or vacuum Spills should be taken care of immediately before they harden or stain with a slightly dampened sponge.

#### **NOTICE**

- \* Please make sure that you have all parts indicated before you begin assembly of this item
- \* This item should be assembled on a soft surface to prevent scratching the finish during assembly
- \* This item may require periodic tightening

Weight Capacity: 275 lbs (single seat)

550 lbs (two person seat)

Warning: Do not stand on bench

Warning: Do not over torque bolts/screws









# Part List and Hardware List


Tart List and Hardward List			
PIECE	DESCRIPTION	PICTURE	QUANTITY
5	Left Frame	田	1X
7	Left Back Frame		1X
11	Left Seat Frame		1X
14	Left Front Frame		1X
17	Left Side Frame	田	1X
19	Stool Seat Frame		1X
20	Stool Leg Frame		2X
21	Stool Front/Side Frame	7	2X
23	Seat Cushion		1X
24	Back Cushion		2X
26	Stool Seat Cushion	$\Diamond$	1X
В	Allen bolt(M6x30 mm)	0	20X
С	Allen bolt(M6x40 mm)	0	6X
E	Flat Washer	0	26X
F	Allen Key		1X

Product Dimension: 43.31"x26.77x31.89"H (Bench) 15.75"x15.75x12.60"H (Stool)

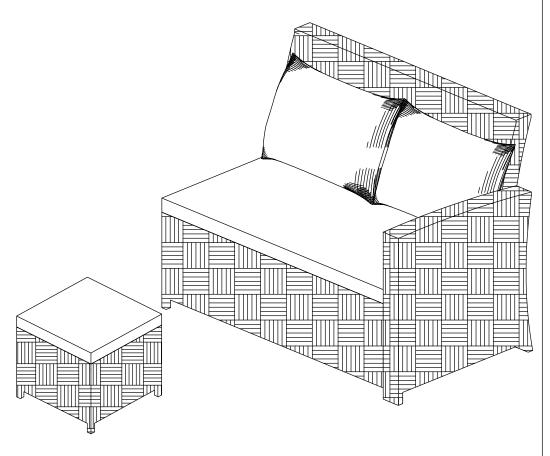


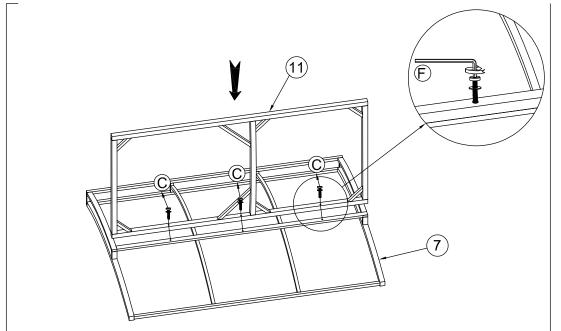


STEP 1: Connect Left Back Frame (7) & Left Seat Frame (11), tighten Allen Bolt (C), Flat Washer (E) with Allen Key (F).

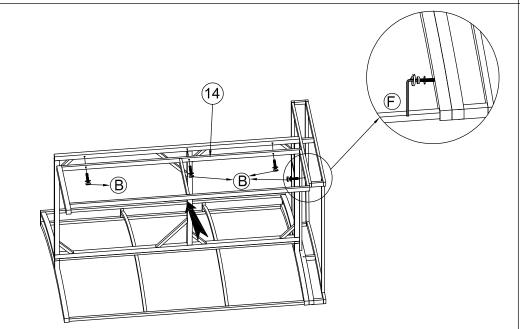


STEP 3: Connect The Part from Step 2 and Left Front Frame (14), tighten Allen Bolt (B), Flat Washer (E) with Allen Key (F).

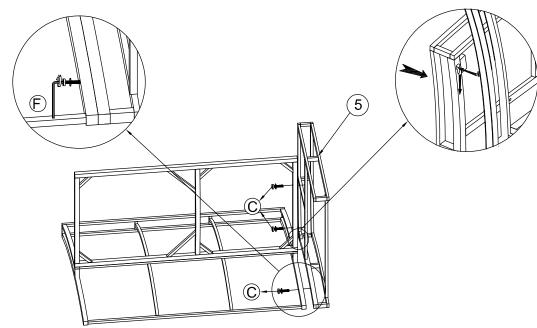


STEP 2: Connect The Part from Step 1 and Left Frame (5), tighten Allen Bolt (C), Flat Washer (E) with Allen Key (F).

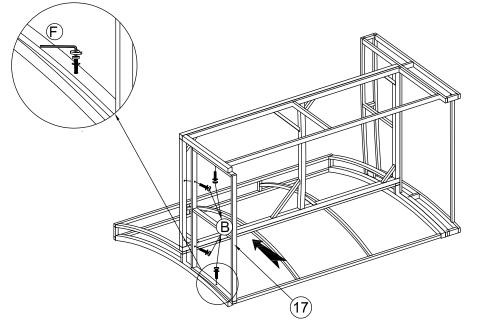

STEP 4: Connect The Part from Step 3 and Left Side Frame (17), tighten Allen Bolt (B), Flat Washer (E) with Allen Key (F).

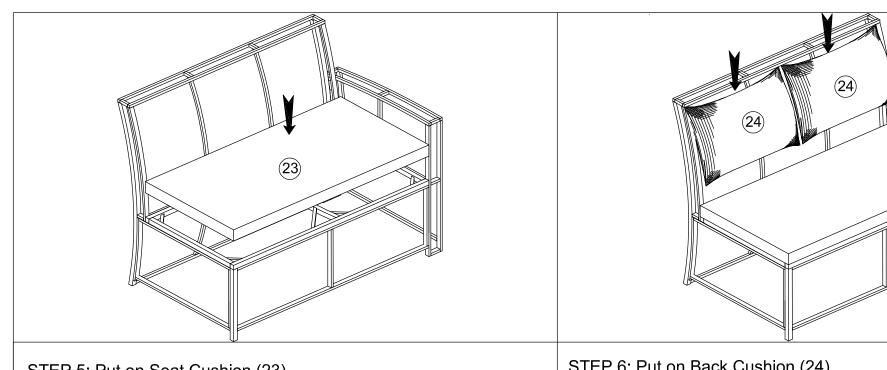


STEP 5: Put on Seat Cushion (23).

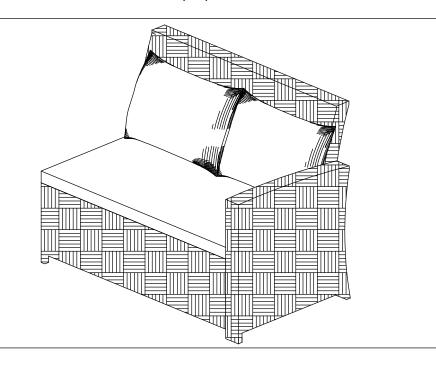

FINISH LEFT BENCH

STEP 6: Put on Back Cushion (24).

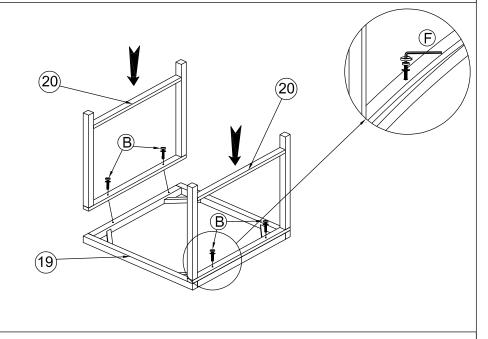

STEP 7: Connect Stool Seat Frame (19) & Stool leg Frame (20), tighten Allen Bolt (B),Flat Washer (E) with Allen Key (F).

