

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact: \_\_\_\_\_

# One-Light LED Flush Mount

Ceiling mounted • Damp location listed



## Description:

One-light 11 inch LED Flush Mount in Brushed Nickel features a white linen glass bowl. Fixtures are dimmable to 10 percent with Triac, phase forward or ELV dimmers. 3000K and 90 CRI.

## Specifications:

- Brushed Nickel (plated)
- Steel Construction
- Etched White Linen glass bowl
- 920 lumens 44 lumens/watt (delivered)
- 3000k color temperature, 90+ CRI
- TM-21 54,000 hour life.
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

## Performance:

Number of Modules	1
Input Power	21w
Input Voltage	120 V
Input Frequency	50/60 Hz
Lumens/LPW (Source)	1601/81 (LM-82)
Lumens/LPW (Delivered)	920/44 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	54,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-25 °C
Max. Operating Temp	25 °C
Warranty	5 year warranty
Labels	ETL Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016


## Images:



## Dimensions:

Diameter: 11"

Height: 4-5/8"

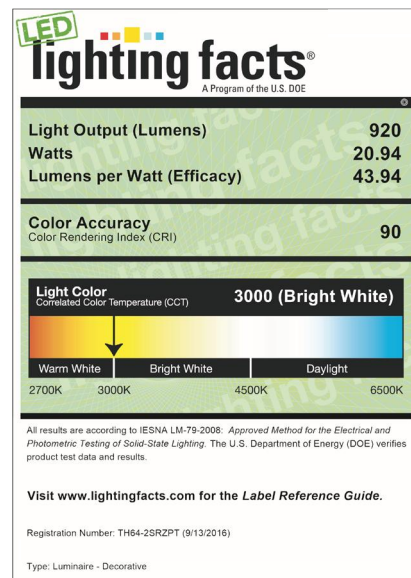

# One-Light LED Flush Mount

Ceiling mounted • Damp location listed



## Dimming Notes:

---

This collection is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

## Dimming Controls

---

Lutron NTELV-300
Leviton 6672
Leviton 6674
Lutron AYLV-600P
Lutron NTLV-600
Lutron MAELV-600
Lutron N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.