



ASSEMBLY INSTRUCTION


QUATREFOIL DAYBED

A Arm-LSF  1 pc	B Arm-RSF  1 pc	C Back Panel  1 pc	D Side Rail  2 pcs	E Slat  2 pcs
F Allen Bolt Ø5/16"*50mm  4 pcs	G Allen Bolt Ø5/16"*20mm  8 pcs	H Lock Washer Ø5/16  12 pcs	I Flat Washer Ø5/16"*19mm  12 pcs	J Allen Key 4mm  1 pc
K Screw #8*30mm  28 pcs	L Wood Plug Ø22mm  4 pcs			

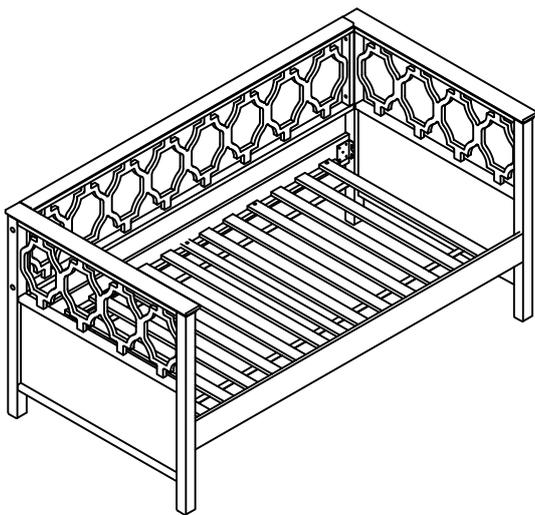


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


1 Attached Arm-LSF(A), Arm-RSF(B) to Back Panel(C). Use Allen Bolt(F), Lock Washer(H), Flat Washer(I) and Allen Key(J).

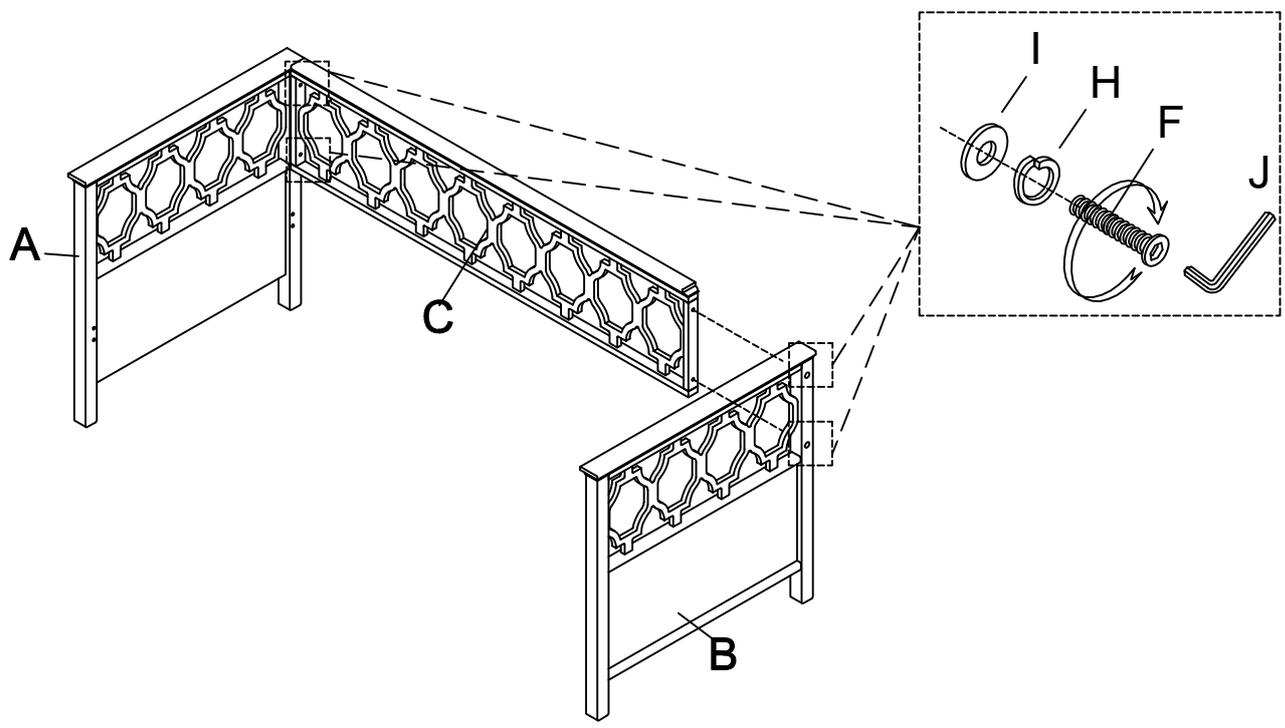


2 Attached Side Rail(D) to Arm-LSF(A) and Arm-RSF(B). Use Allen Bolt(G), Lock Washer(H) and Flat Washer(I) on holes of Arm-LSF(A) and Arm-RSF(B), turn the Allen Key(J) in Allen Bolt(G).

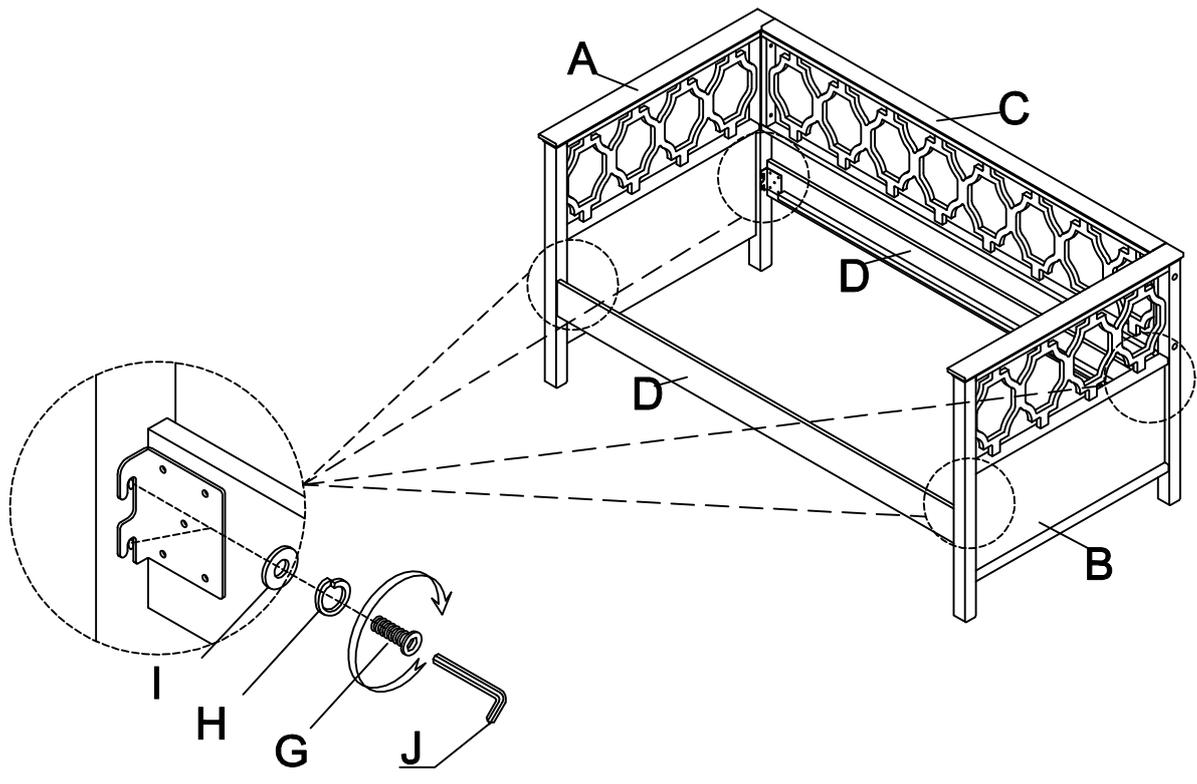

3 Screwing Slat(E) in Side Rail(D) via Screw(K).

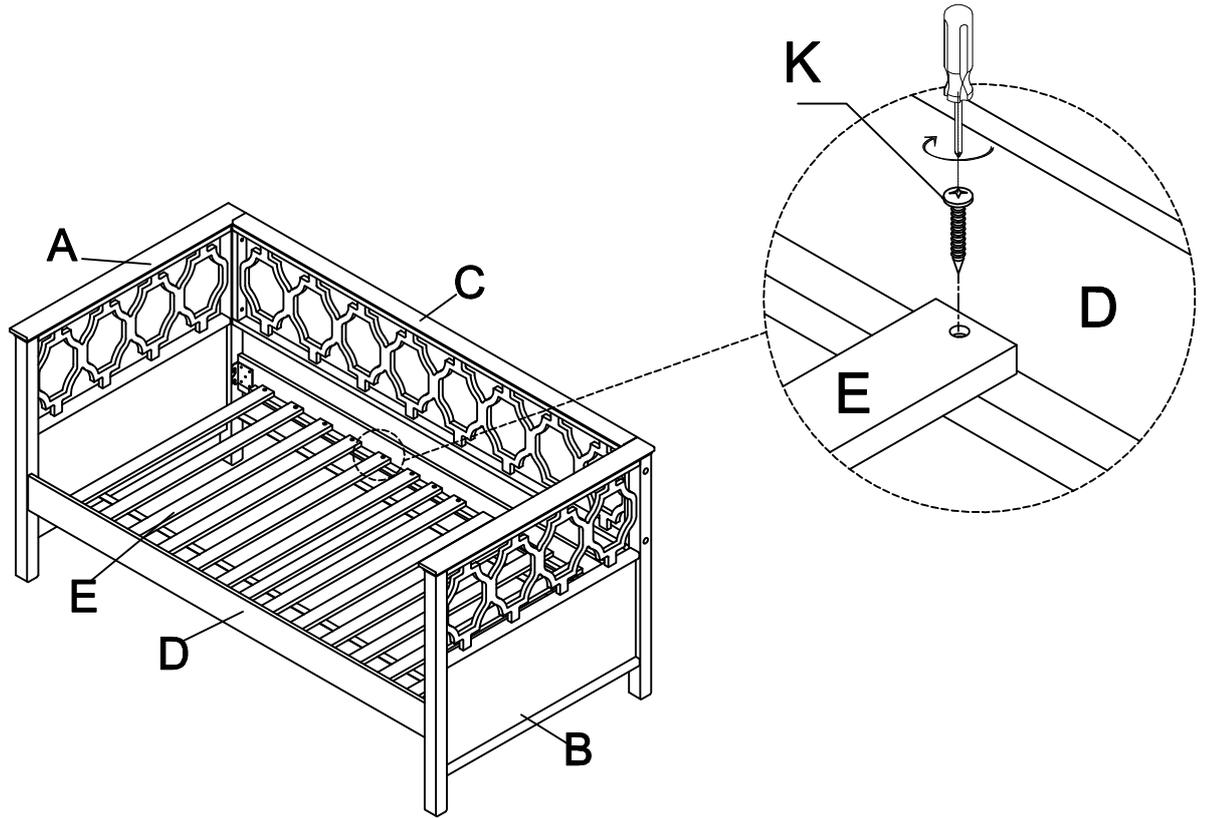

4 Attached Wood Plug(L) on holes of Arm-LSF(A) and Arm-RSF(B).

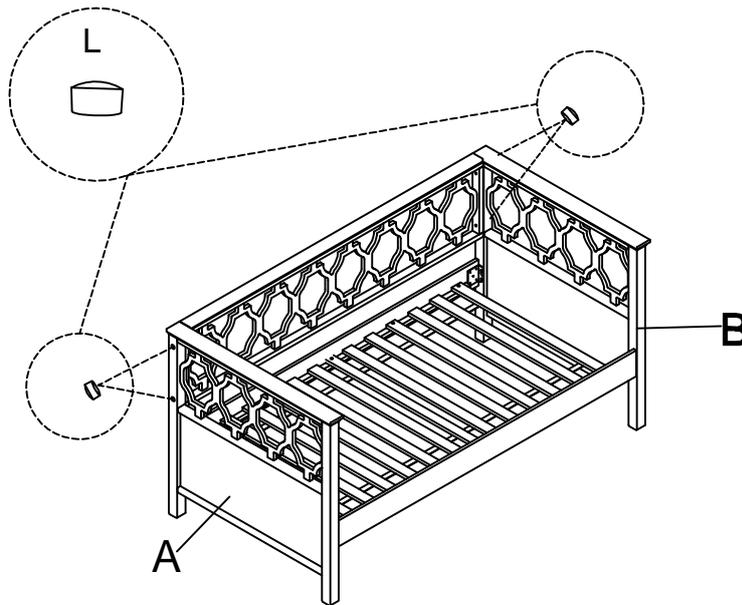



Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

ASSEMBLY INSTRUCTION

TRUNDLE


A Trundle Front Panel  1 pc	B Trundle Back Panel  1 pc	C Side Rail-LSF  1 pc	D Side Rail-RSF  1 pc	E Slat  2 pcs
F Slat  1 pc	G Allen Bolt $\text{Ø}5/16'' \times 20\text{mm}$  8 pcs	H Lock Washer $\text{Ø}5/16$  10 pcs	I Flat Washer $\text{Ø}5/16'' \times 19\text{mm}$  10 pcs	J Allen Key 4mm  1 pc
K Screw $\#8 \times 30\text{mm}$  24 pcs	L Allen Bolt $\text{Ø}5/16'' \times 32\text{mm}$  2 pcs			

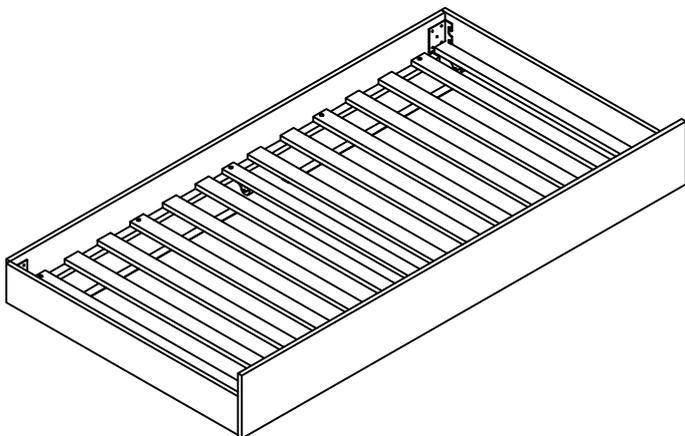


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

1


Attached Trundle Front Panel(A), Trundle Back Panel(B), Side Rail-LSF(C) and Side Rail-RSF(D). Use Allen Bolt(G), Lock Washer(H) and Flat Washer(I) on holes of Side Rail-LSF(C) and Side Rail-RSF(D), turn the Allen Key(J) in Allen Bolt(G).

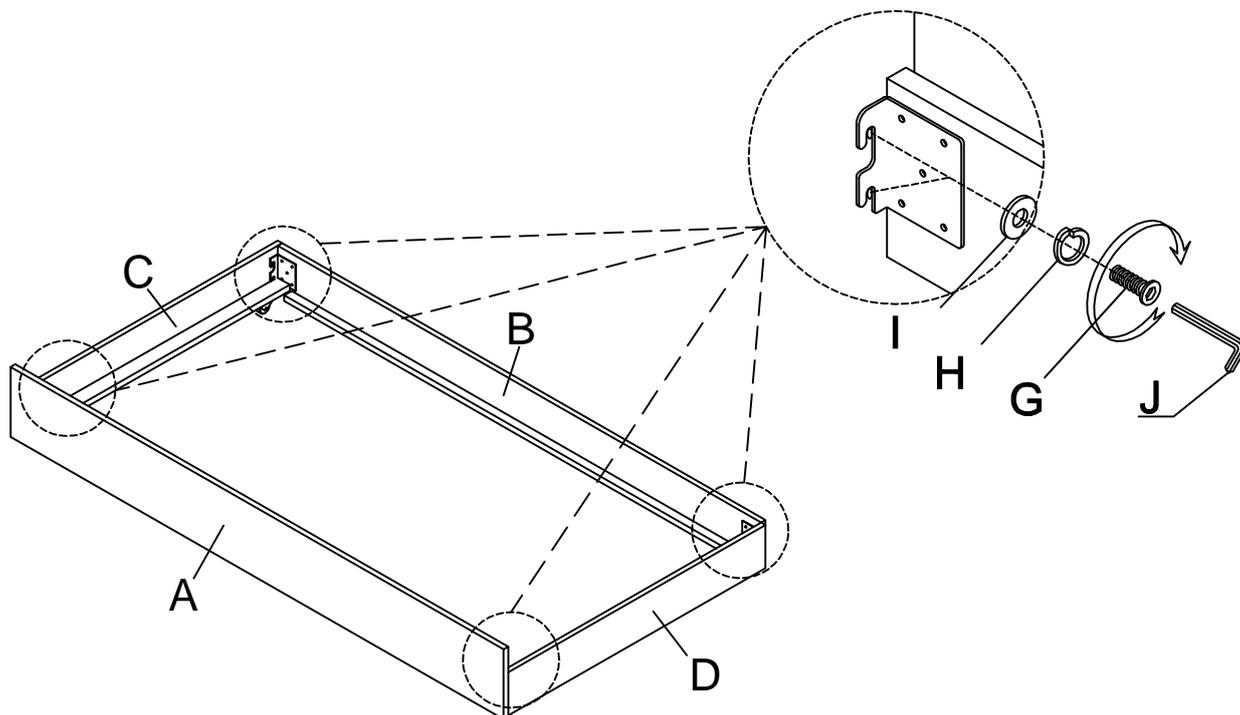**2**

Attached Slat(F) to Trundle Front Panel(A) and Trundle Back Panel(B). Use Allen Bolt(L), Lock Washer(H) and Flat Washer(I) on holes of Trundle Front Panel(A) and Trundle Back Panel(B), turn the Allen Key(J) in Allen Bolt(L).

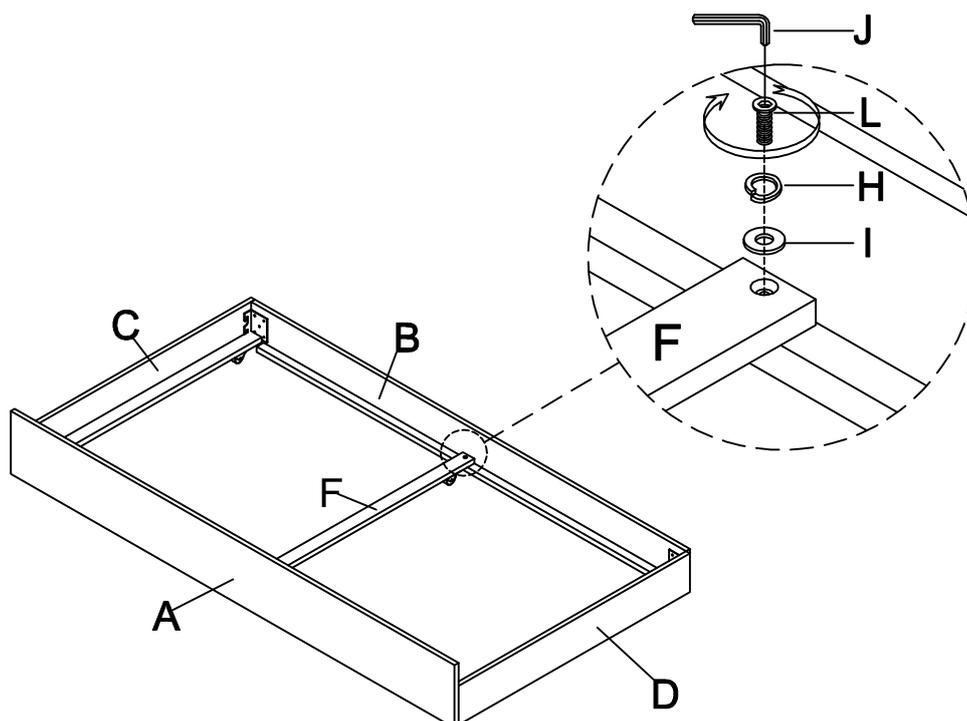

3 Screwing Slat(E) in Trundle Front Panel(A) and Trundle Back Panel(B) via Screw(K).

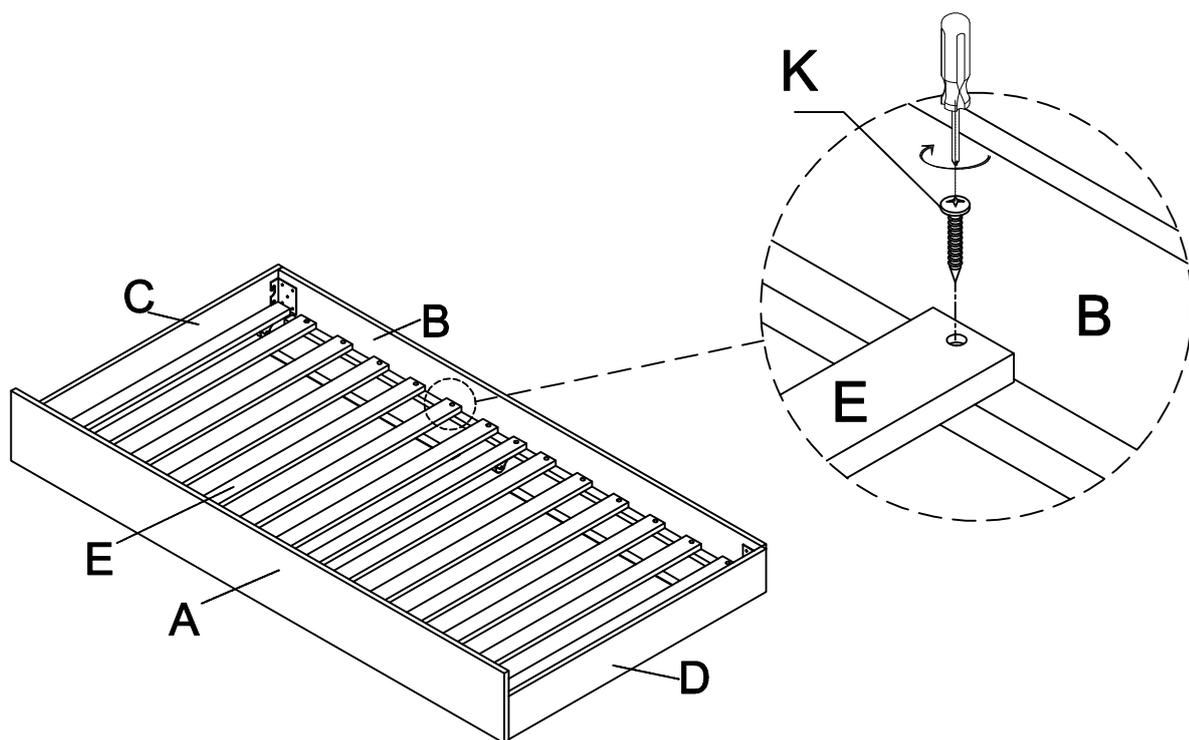

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.