


ASSEMBLY INSTRUCTIONS & PARTS IDENTIFICATION

Hardware Kit		
Ltr	Qty	Description
A	1 PC	WING NUT
B	1 PC	LOCK WASHER
C	1 PC	FLAT WASHER

Parts Key			
No		Qty	Description
1		1 Pc	CHAIR BACK / SEAT
2		1 Pc	LEG ASSEMBLY
3		4 Pcs	RUBBER FLOOR PROTECTOR

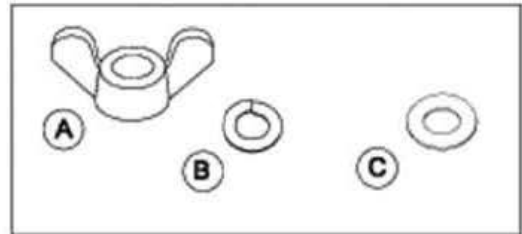



STEP 1

- Carefully lay chair flat on a smooth flat surface to prevent scratching
- Remove legs from base of seat.


STEP 1



STEP 2

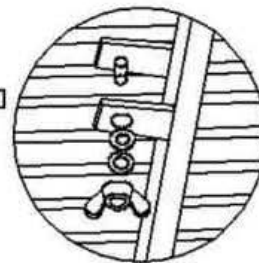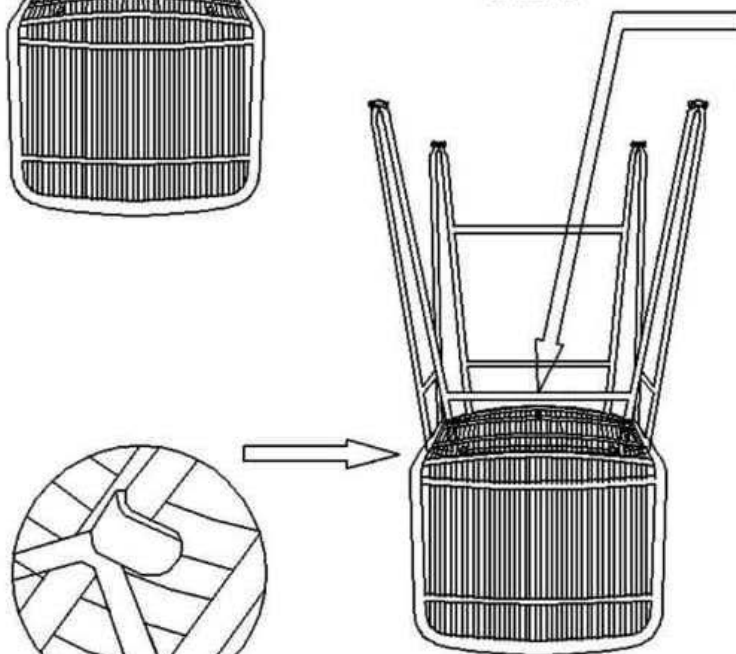

Detail A

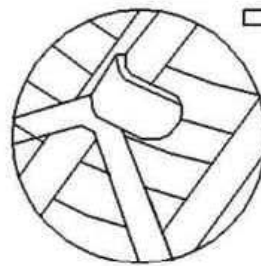

Detail B



STEP 2

Attach the leg assembly to the seat by inserting the base into the flange hooks (See diagram B) then align the front to the bolt flange . Secure the leg assembly using a flat washer , lock washer and wing nut tighten completely (See diagram A).