

# INSTALLATION INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker box and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to lose any small parts necessary for installation.
3. Pull the black, white and ground wires out of base of the post (A).

## CONNECTING THE WIRES (Fig. 2)

4. While supporting the lantern connect the electrical wires. If your post has a ground wire (green or bare copper), connect the fixture ground wire to it. If not, consult your electrician for proper grounding. After wires are connected, Tuck them carefully inside the post. (A)

## COMPLETING THE INSTALLATION (Fig. 1)

5. Align the lantern (C) with post (A) and secure with screws (B). (Fig.1)
6. At this point, **unscrew cylinder nuts(F), and remove roof(E)**, to install 60W/E26/**ST58** bulb (Edison bulb included) in accordance with the fixture specification.

**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!  
(NE PAS DEPASSER LA PUISSANCE NOMINALE  
MAXIMALE!)**

7. Replace the glass shade (D), followed by roof(E) and secure with cylinder nuts(F).

Your installation is now complete. Return power and test the fixture.

**“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”**

**ATTENTION – RISQUE D’INCENDIE, CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADEQUATS.**

Fig. 1

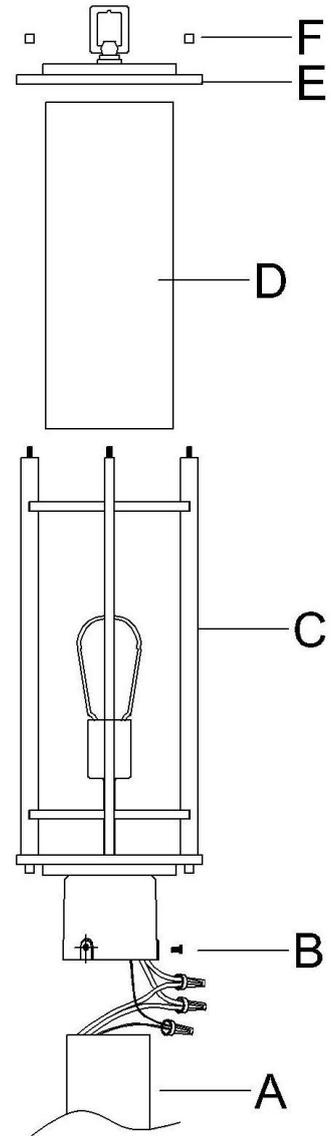


Fig.2

