Model# HRD4803U

Thor Kitchen 48-inch Professional Dual Fuel Range



DIMENSION & WEIGHT

Product Dimension

Product width	47.9"
Product height (from bottom to top of back splash)	38.47"- 39.47"
Product height (from bottom to top of side panel)	35.91"- 36.91"
Product depth (from back panel to bullnose)	27.86"
Product depth (from back panel to control panel)	26.47"
Product depth (from back panel to front of side panel)	24.19"
Depth of control panel (to the control panel face)	2.28"
Depth of control panel (to the bullnose)	3.67"
Cast iron cooking grate (W x L)	10 3/4" * 23"
Adjustable legs	Recommend not to exceed 1"
Required Cutout Size (W x D x H)	48 1/8" x 24.19" x 35.91(+1)"
30" Oven Cavity Dimension	24"W * 15 1/4"H * 18"D
30" Oven Rack Dimension	22 3/4" * 15 1/2"
Distance between Oven Rack	2 1/8"

FEATURES

Black Porcelain Drip Pan On Cook Top Heavy Duty Continuous Cast Iron Cooking Grates Automatic Re-ignition Safety Feature

Blue LED Illuminated Knobs

Stainless-Steel Professional Style

Blue Porcelain Oven Interior

2 x Halogen Lights

Commercial Convection Fan

12K	15K Griddle	12K	15K (650 BTU Simmer)
18K		15K (650 BTU Simmer)	18K

BU	RN	IER	PERI	FORMAI	VCE

Total Number of Range Top Burners 6 Burners
Front Right (Single) 18,000 BTU
Front Left (Single) 18,000 BTU

Front Middle (Dual Burner with simmer function) 15,000 BTU (650 BTU for Simmer)
Rear Right (Dual Burner with simmer function) 15,000 BTU (650 BTU for Simmer)

Rear Left (Single) 12,000 BTU
Rear Middle (Single) 12,000 BTU

Stainless Steel Griddle 15,000 BTU

OVEN AND PERFORMANCE

Oven Capacity
6.7 cu. Ft. (4.2 cu. Ft. for 30-inch oven)
(2.5 cu. Ft. for 18-inch oven)

Bake Power (30-inch oven) 850 W (Top) / 3,000 W (Bottom)

Bake Power (18-inch oven) 2,500 W (Bottom)

Broil Power (30-inch oven) 3,500 W

TECHNICAL DETAILS

Fuel Type Natural Gas / LP Convertible

Electrical Requirements 240V, 4-Prong 14-50R Power Outlet

Circuit Breaker (A) 40A
Frequency (Hz) 60 Hz


ACCESSORIES (NOT INCLUDED)

LPKHRD4803U Liquid Propane Gas Conversion Kit

TR30SS 30-inchTelescopic Rack (for 30-inch oven)

ITHRD4803U 48-inch Island Trim

RG1022 Cast Iron Reversible Griddle

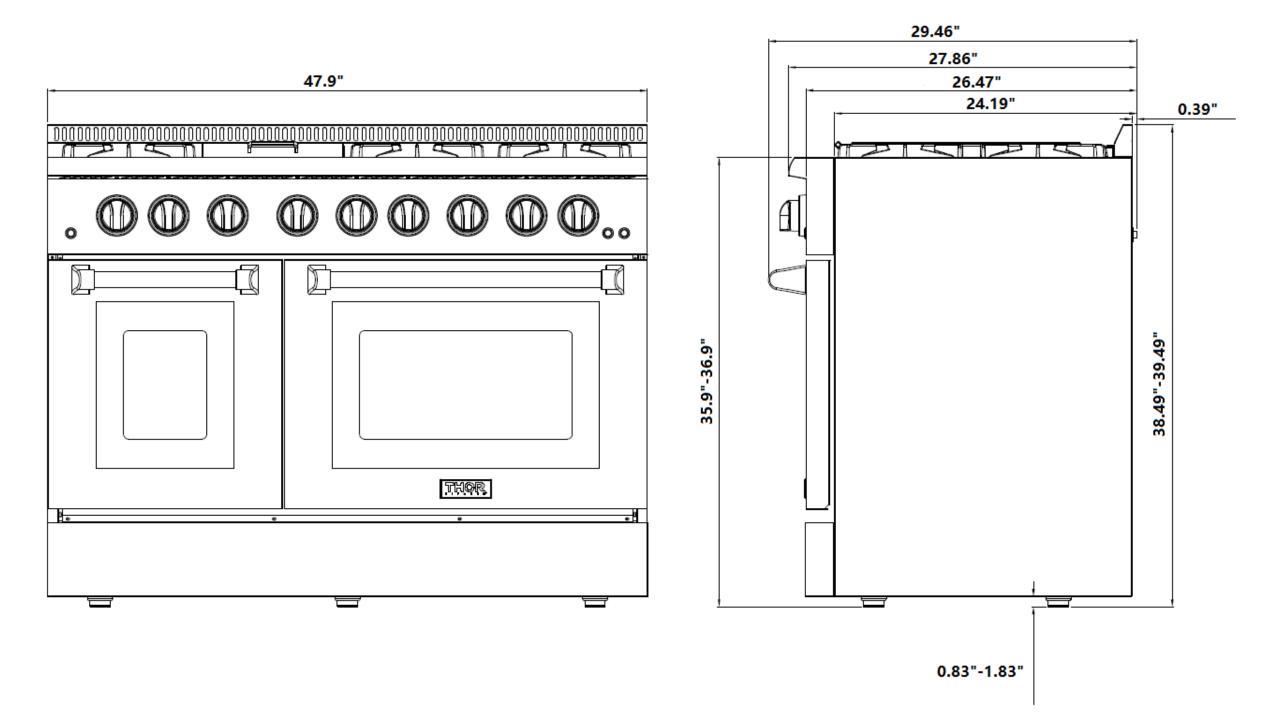

NG: Input Pressure: 7 inches, Output Pressure: 5 inches LP: Input Pressure: 11 inches Output Pressure: 10 inches Regulator Location: Inside the kick Panel – Bottom Right Size of Regulator: ½ inch

