




Product Installation Instructions

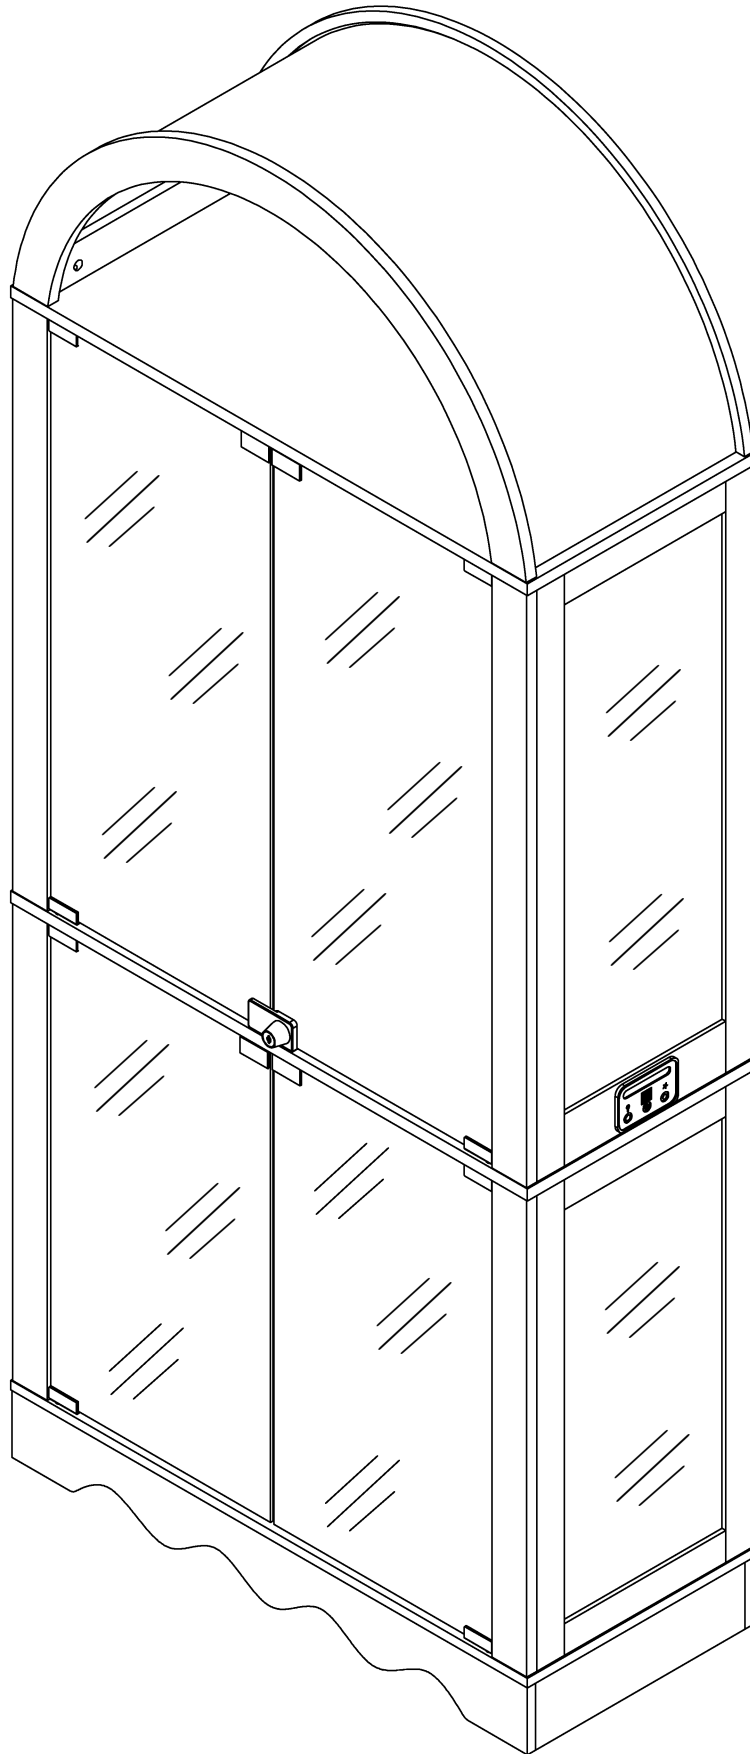





① x1




② x2



③ x1




④ x1




⑤ x2




⑥ x2




⑦ x2



⑧ x2

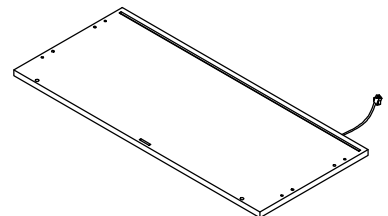


⑨ x1



⑩ x1




⑪ x2




⑫ x1




1




⑬ x2

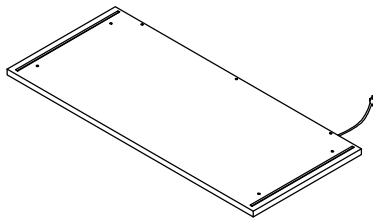


⑭ x1




⑮ x1




⑯ x2

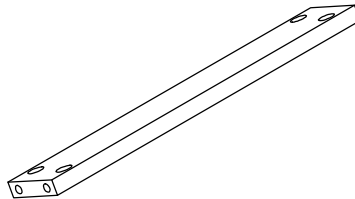


⑰ x1




⑱ x1




⑲ x1

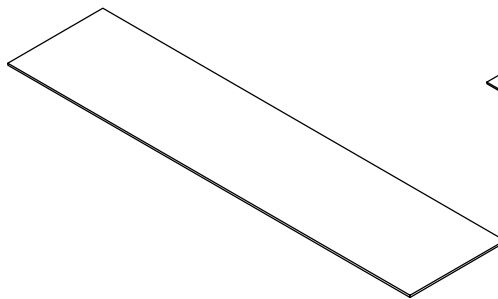


⑳ x1

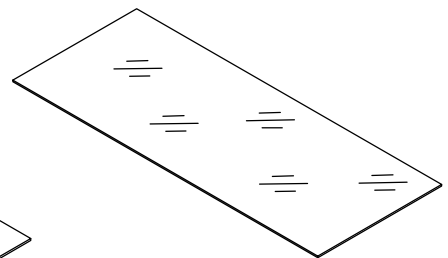


㉑ x3




㉒ x2



㉓ x2






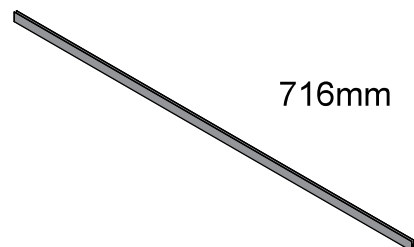


㉔ x2




2

Accessories list


A		Two in one screw (6x28mm)		77pcs +8pcs	
B		Two in one nut (10x12mm)		77pcs +8pcs	
C		Wood Chipping (6x30mm)		16pcs +2pcs	
D		Non-slip pads (50x10mm)		6pcs +2pcs	
E		Fixing clip & screw (3x16mm)		16pcs +2pcs	
F		Wire clamp		3pcs +1pcs	
G		Laminate Support Nail		12pcs +2pcs	
H		Rebound device & Screw (3x16mm)		8pcs +2pcs 2pcs	
		Iron sheet		4pcs	
		Rubber ring		8pcs	
		Hinge		4pcs 4pcs	
I		Double door glass lock & Key		2pcs 1pcs	
J		Sticker (ϕ 20mm)		1pcs	4pcs +2pcs
K		Double end connecting line		1pcs	
L		Connecting line		1pcs	
M	Anti Fall Hardware		AC/DC Adapter (12V $\equiv$ 3.0A)	1pcs	
 x1  x1 (3. 5x14mm)		Double-head screwdriver, use as required  1pcs 3			

Product structure decomposition

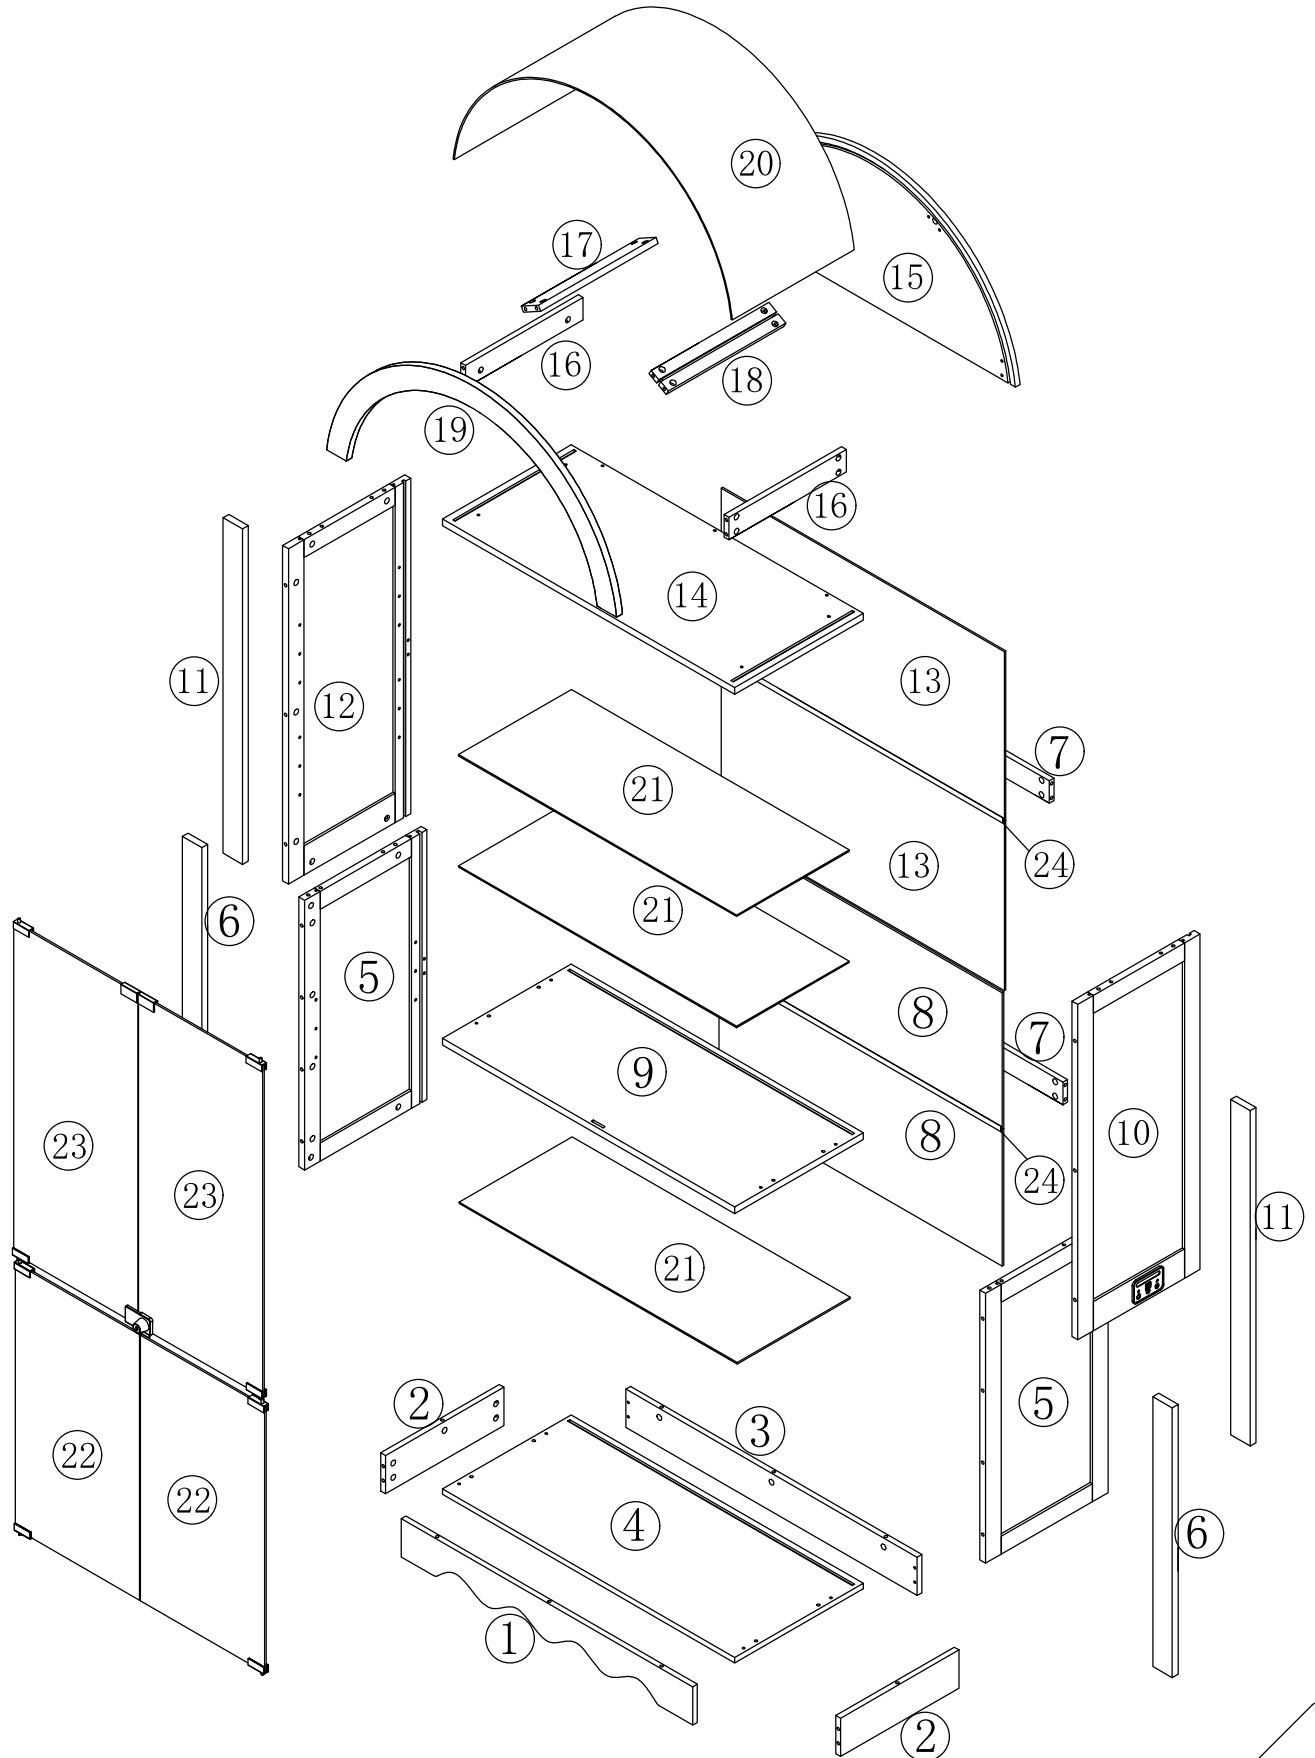


Use parts A and B




Step1

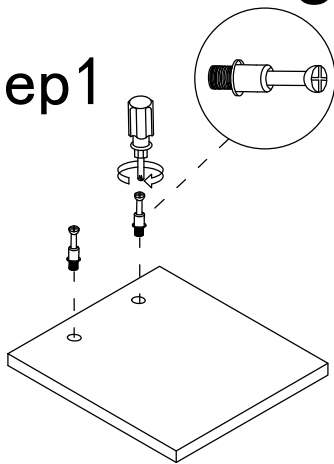

Step2

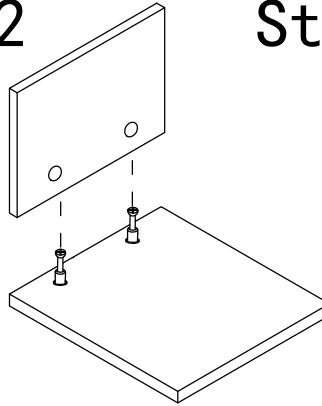

Step3

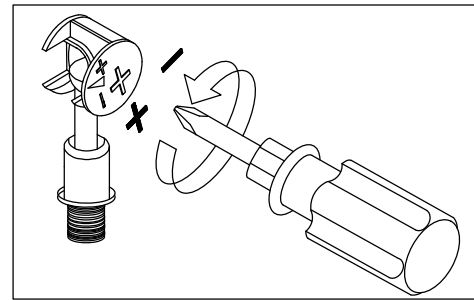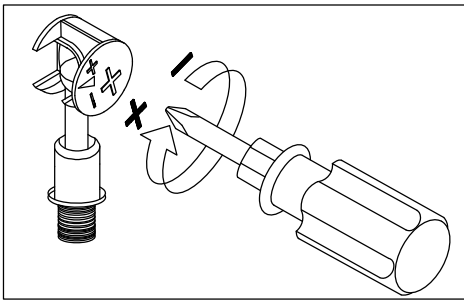
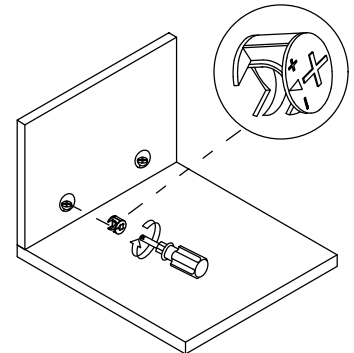


Use a screwdriver to lock in the direction of the "+" sign

Disassemble along the direction of "-" sign

Step 1

A

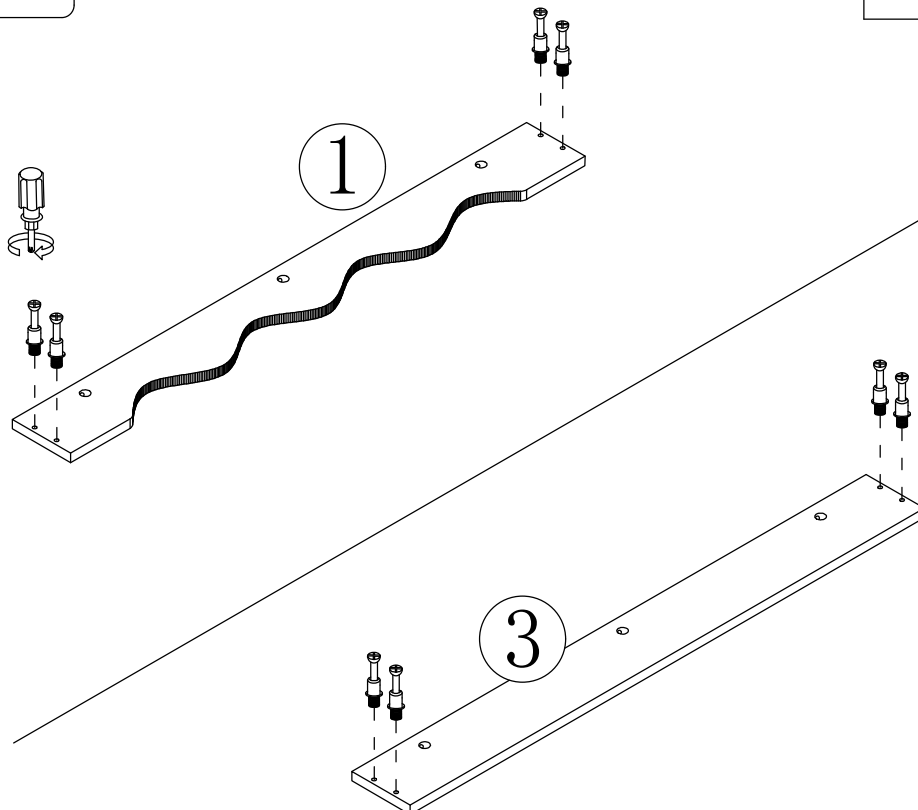


5

Step 2

B




x8

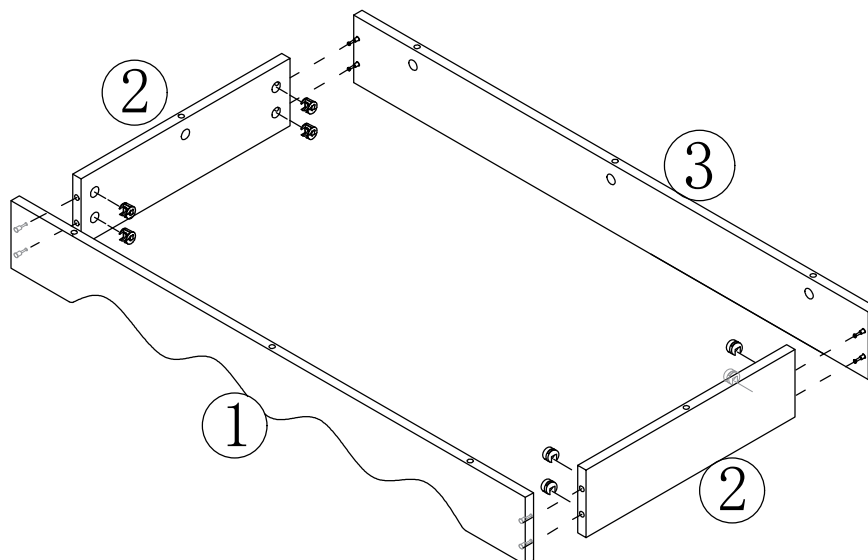


Step 3

A



x8

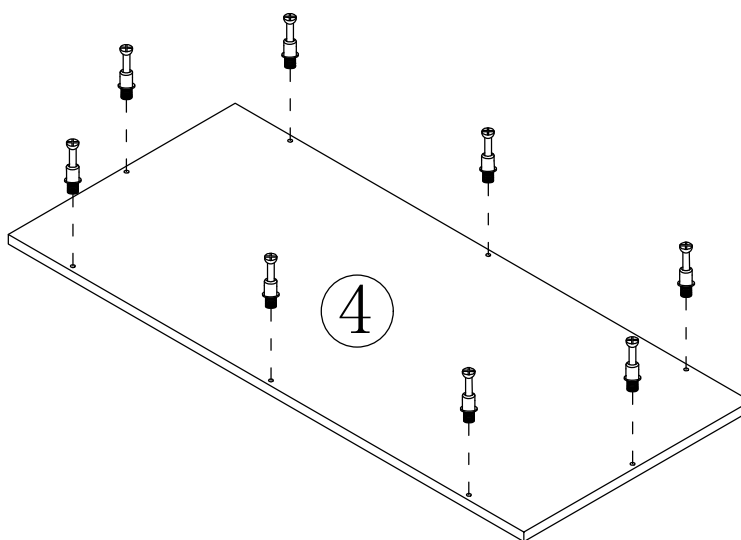


Step 4

B




x8

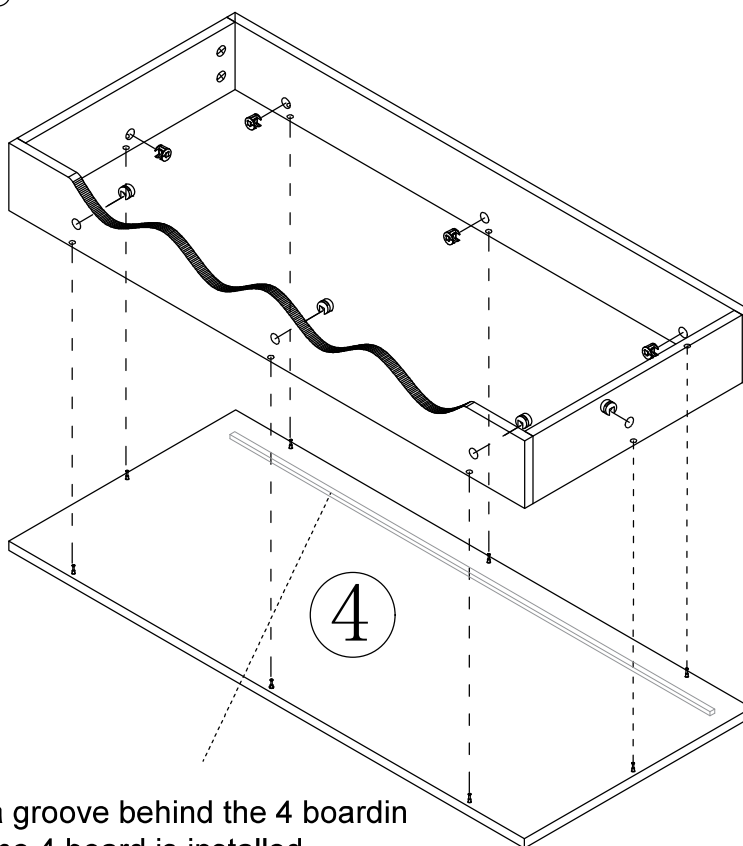

Attention: There is a groove behind the 4 board in the position where the 4 board is installed


Step 5

D





x6

Tear off release paper and stick the black foot pad on the board


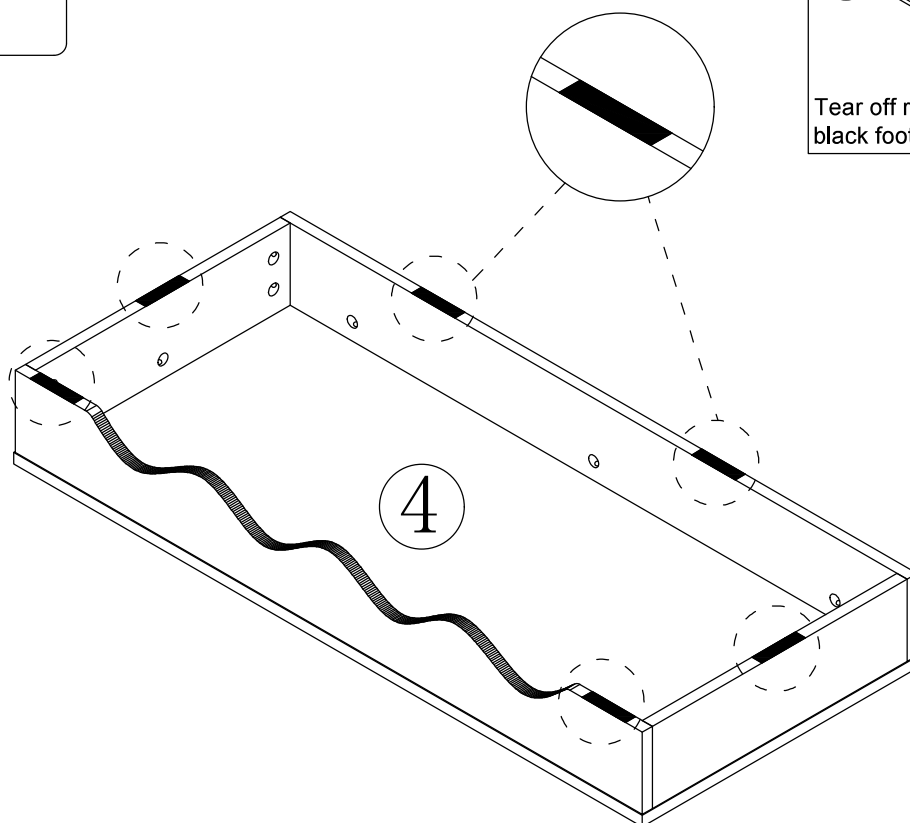


7

Step 6

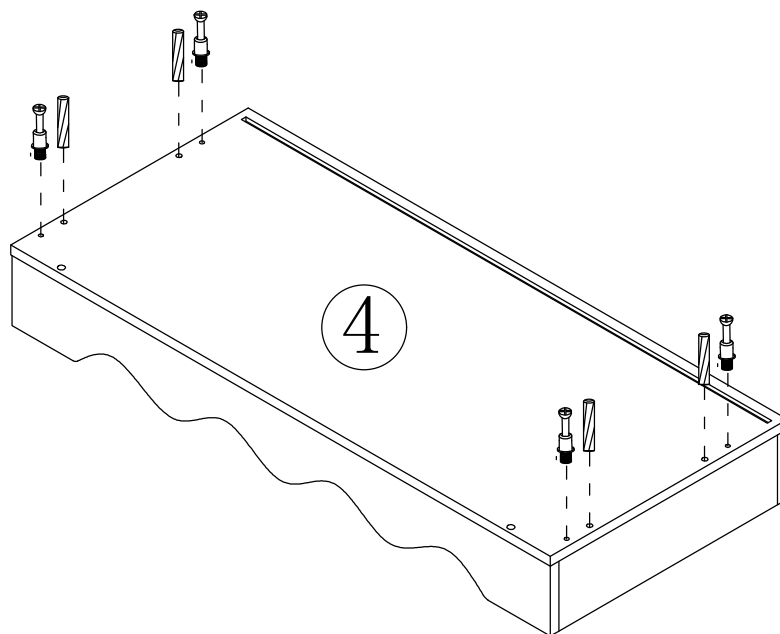


Step 7

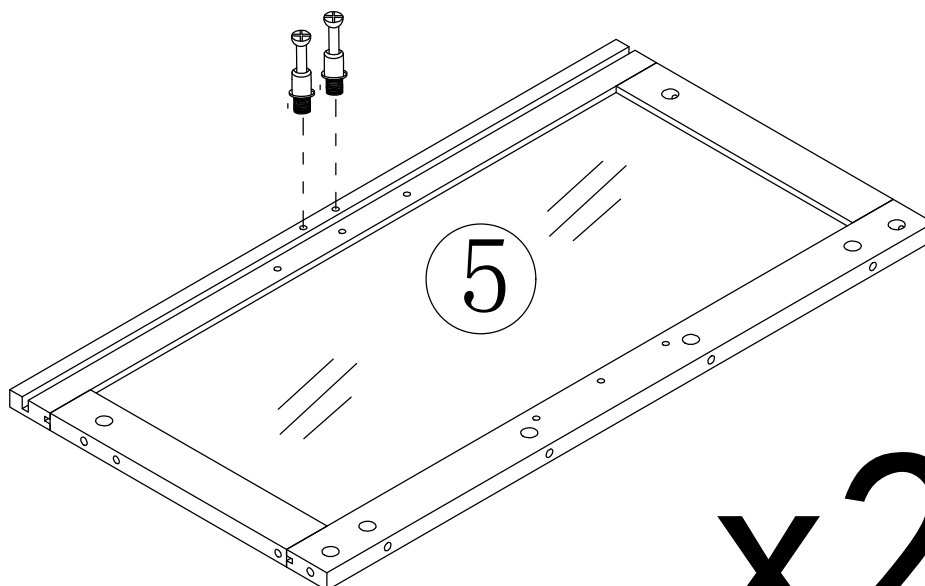



x2

Step 8

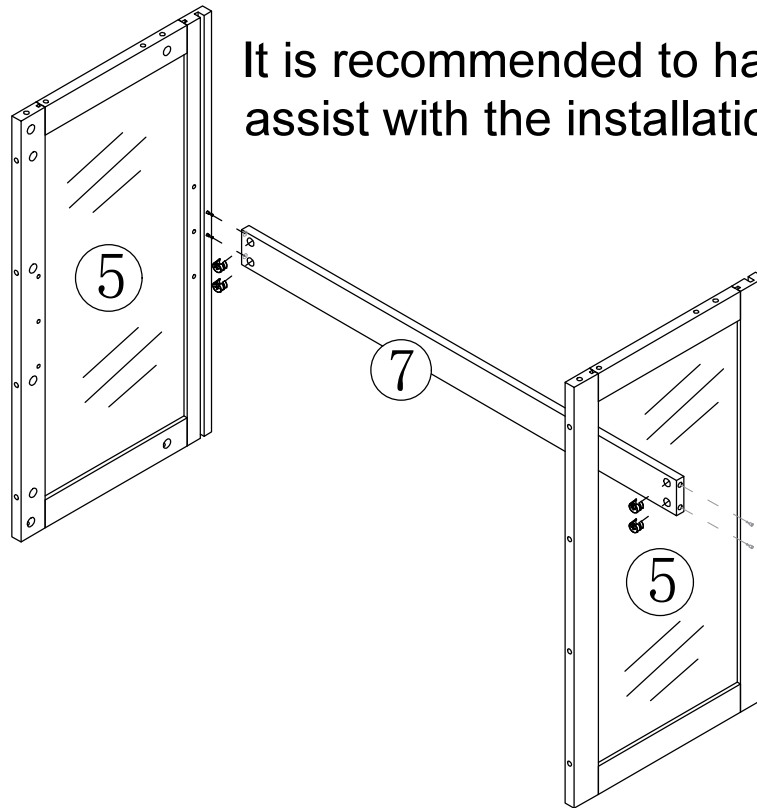



It is recommended to have two people assist with the installation.

Step9

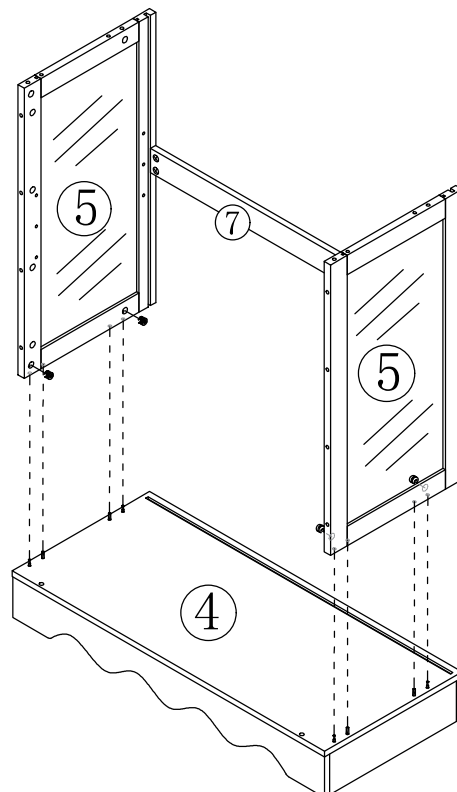



It is recommended to have two people assist with the installation.






Step 10

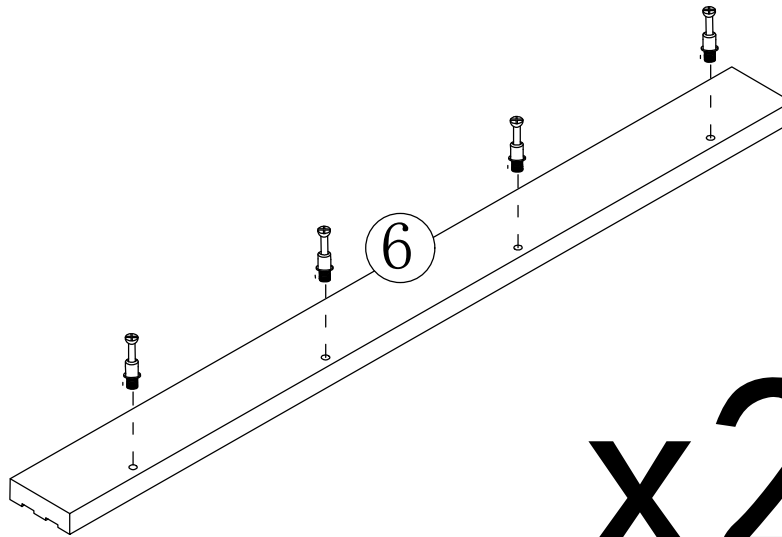




Step 11

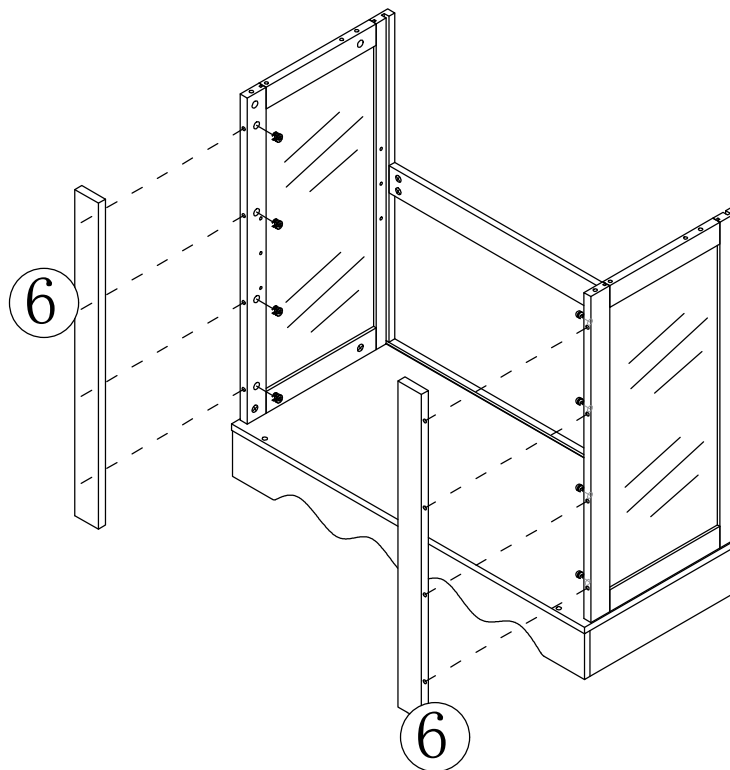



Step 12

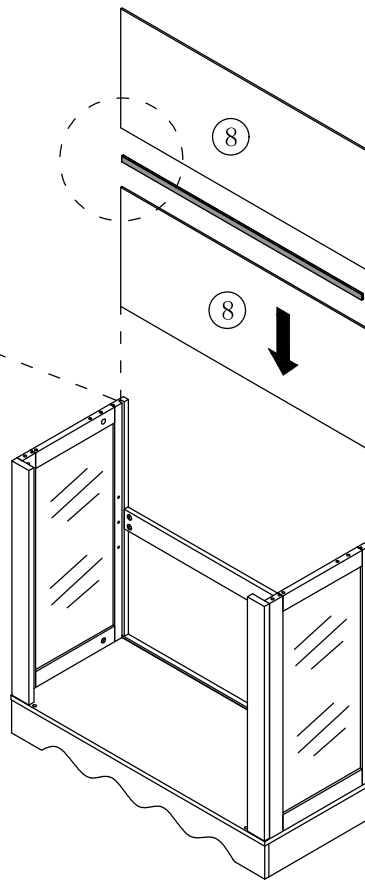




Step 13

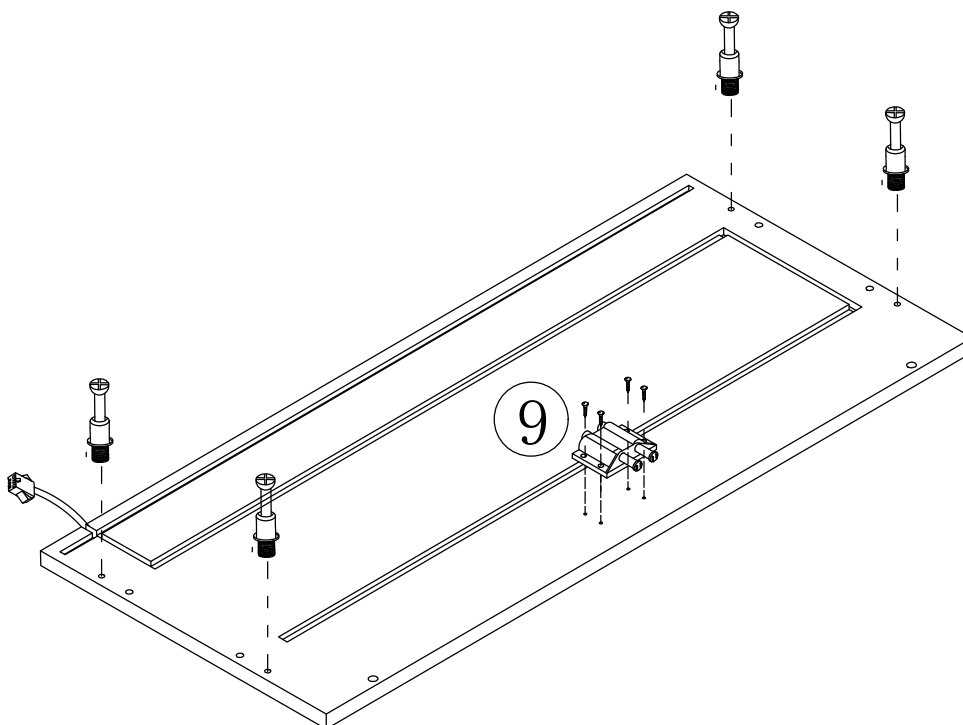



Step 14

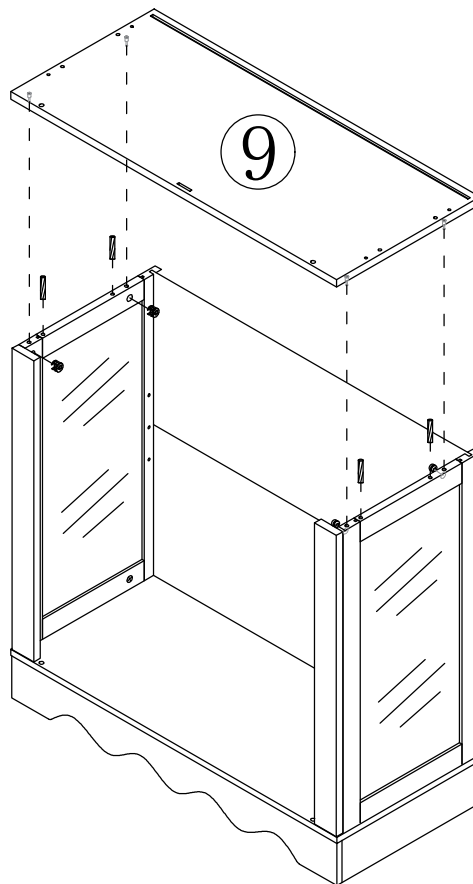



Step 15

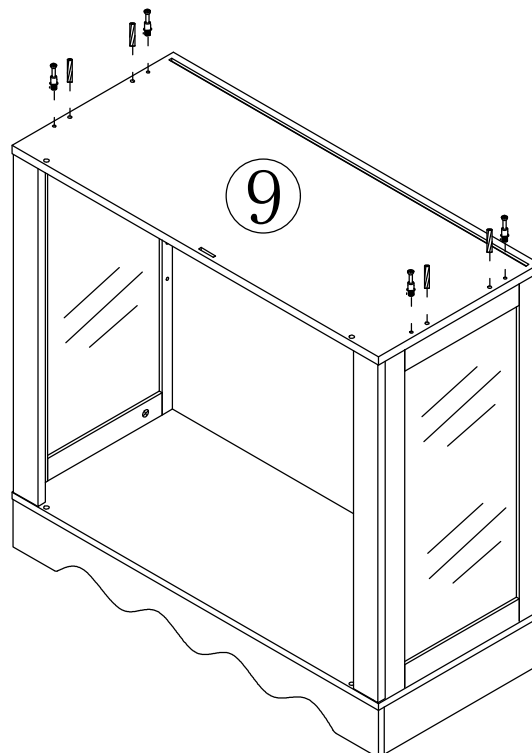

Step 16

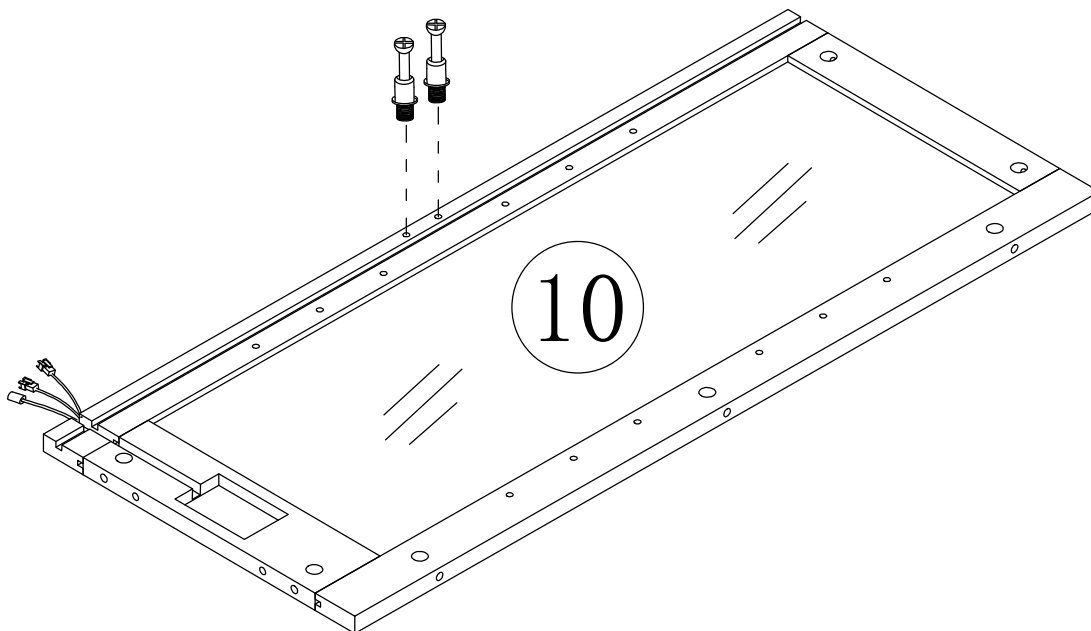

Step 17

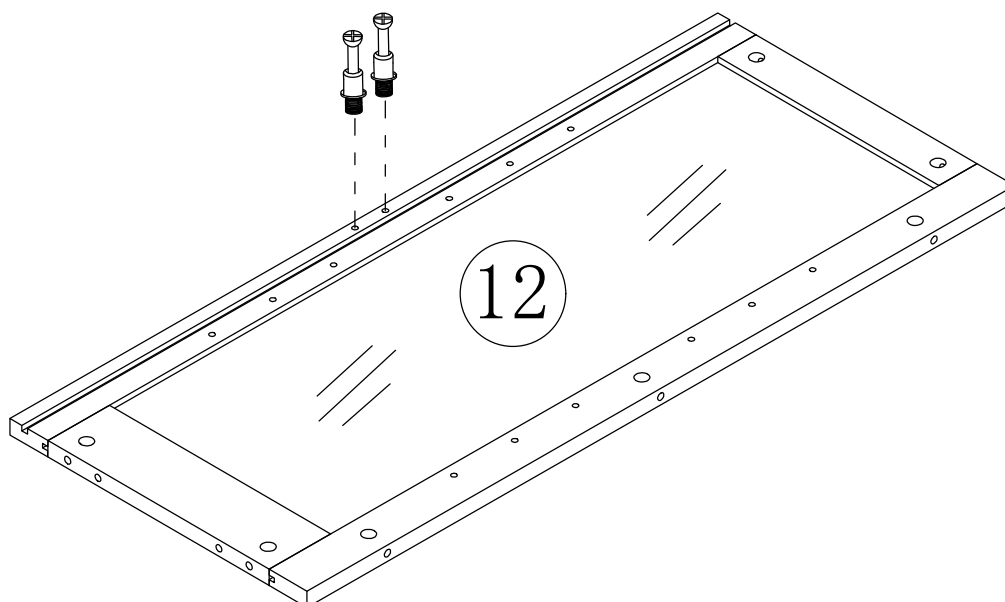


Step 18

B




x4

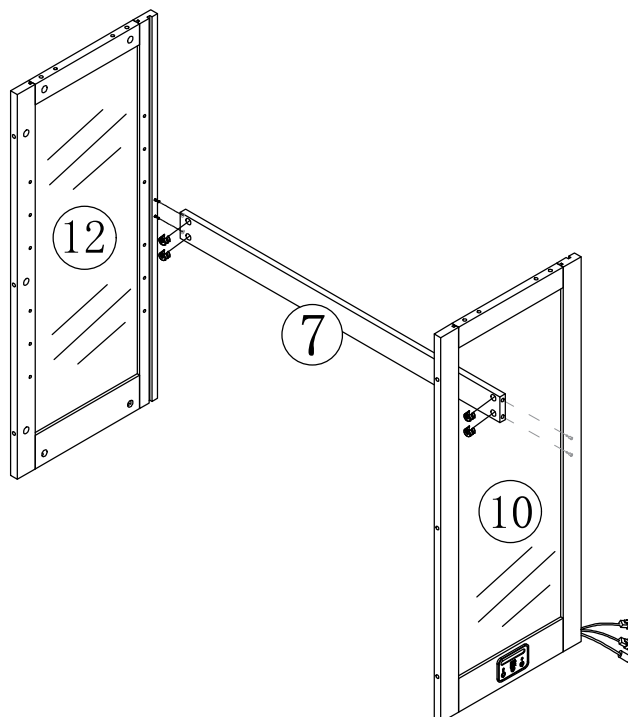


It is recommended to have two people assist with the installation.

Step 19

A



x6

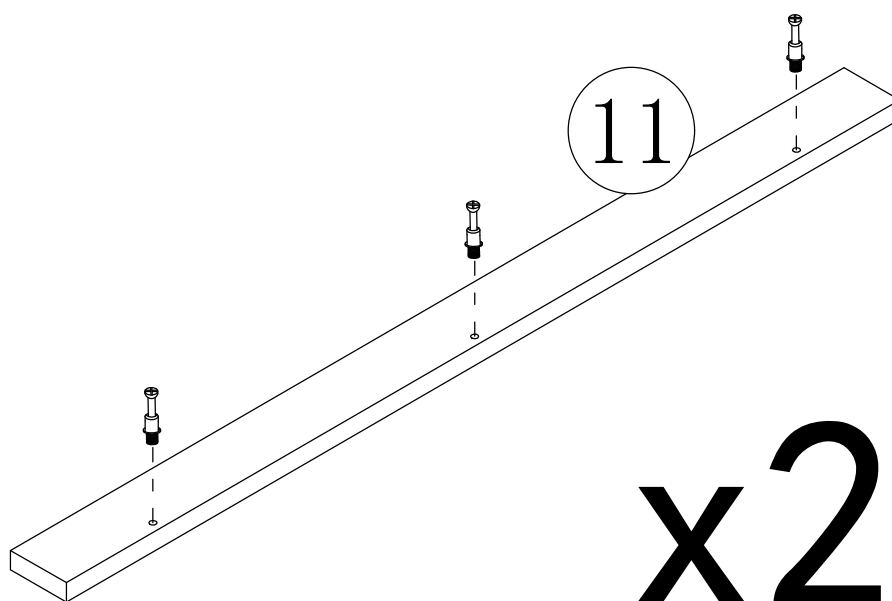


Step 20

B



x4

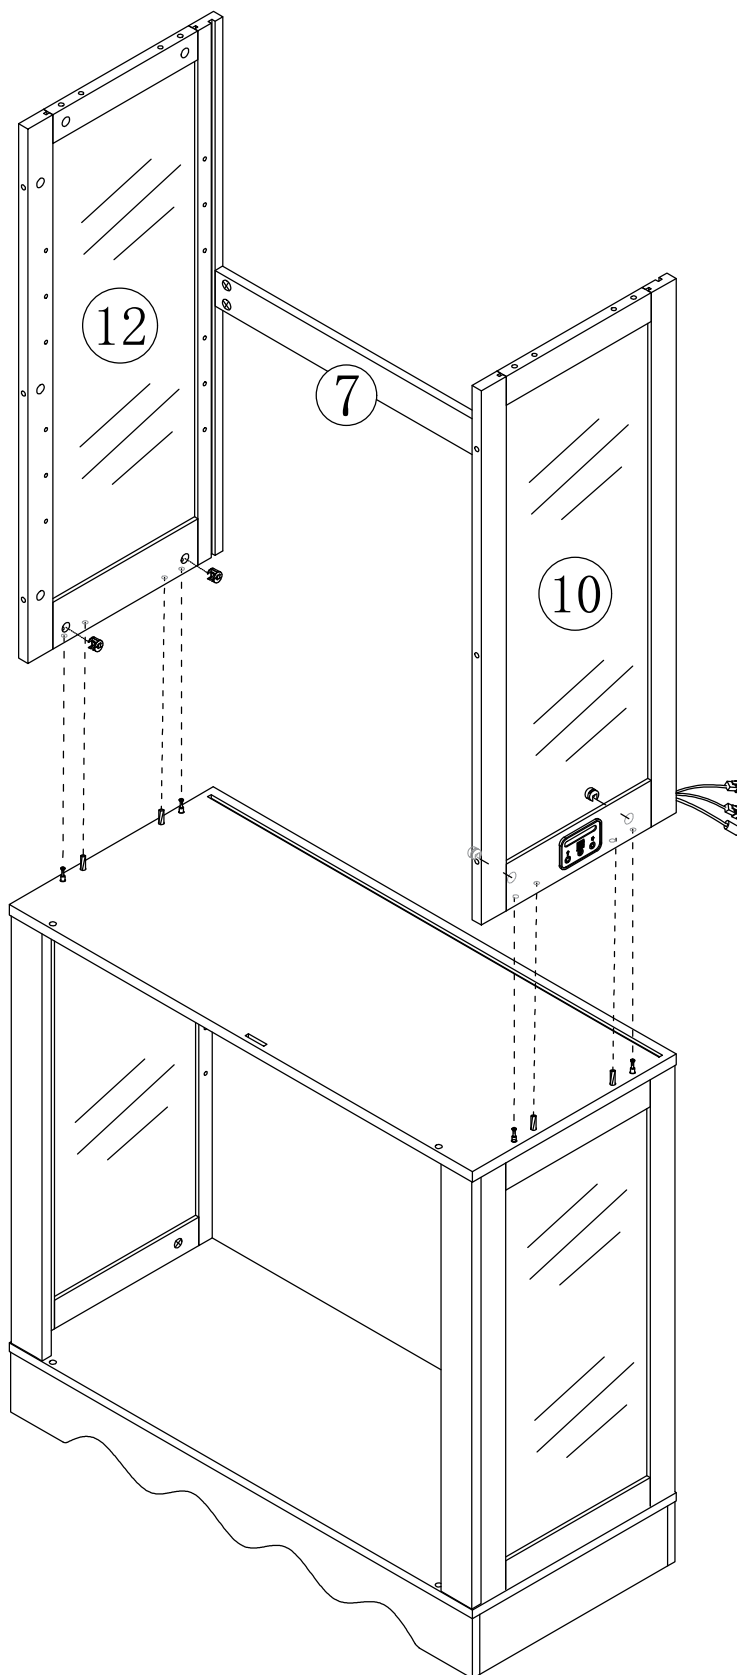


It is recommended to have two people assist with the installation.

Step 21

B




x6

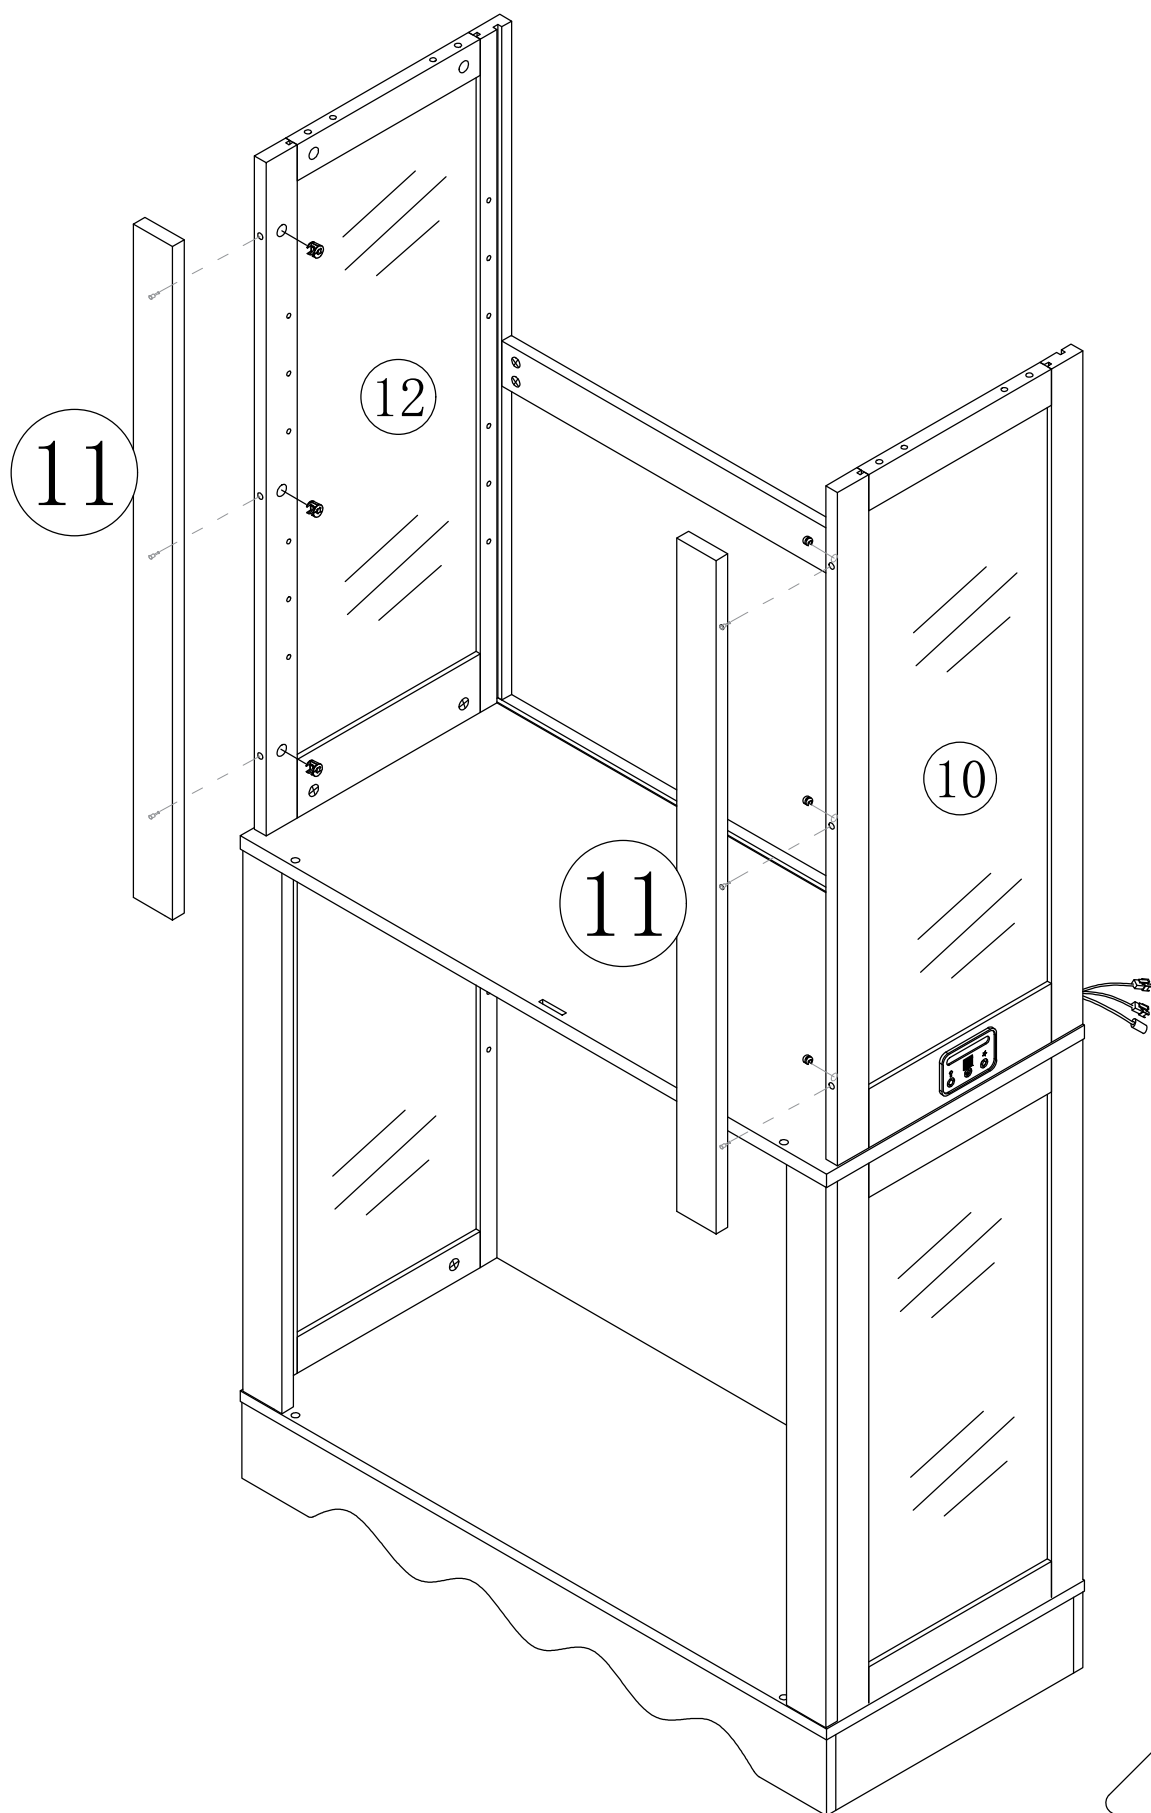

16



Step 22

24 x1


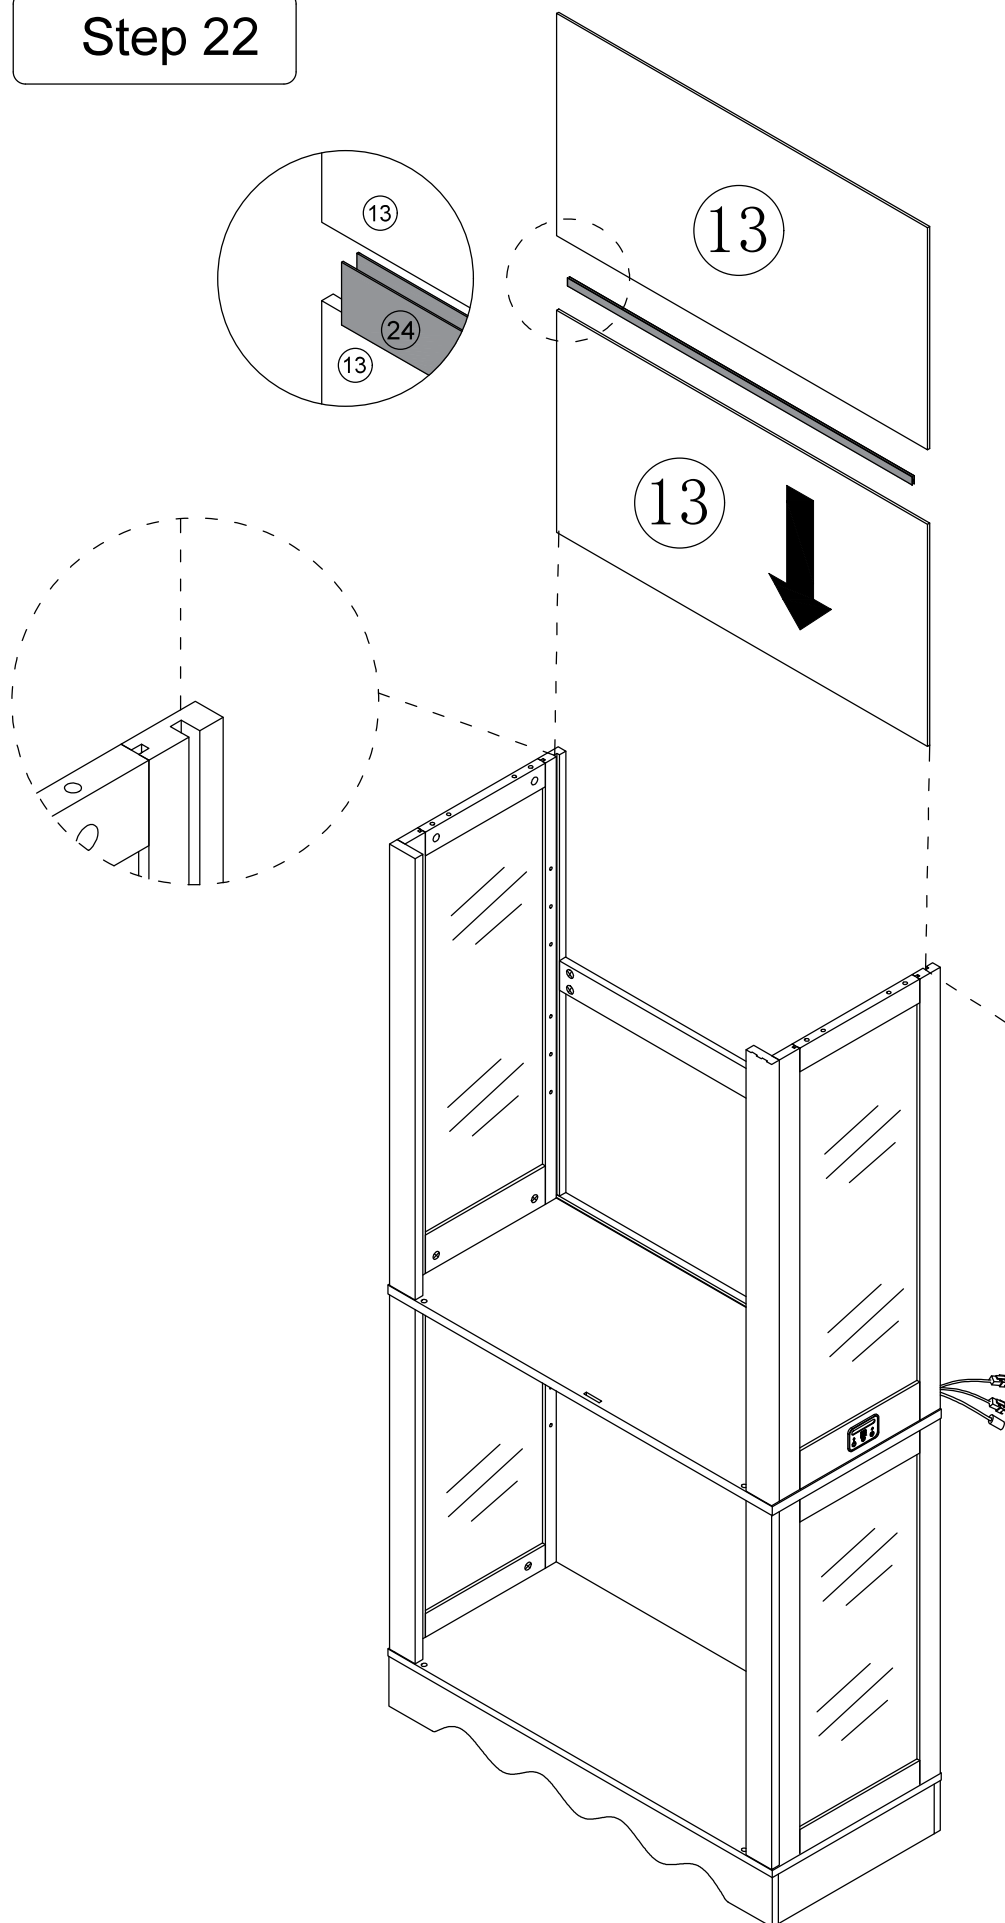


Step 23

Connect the light cable socket

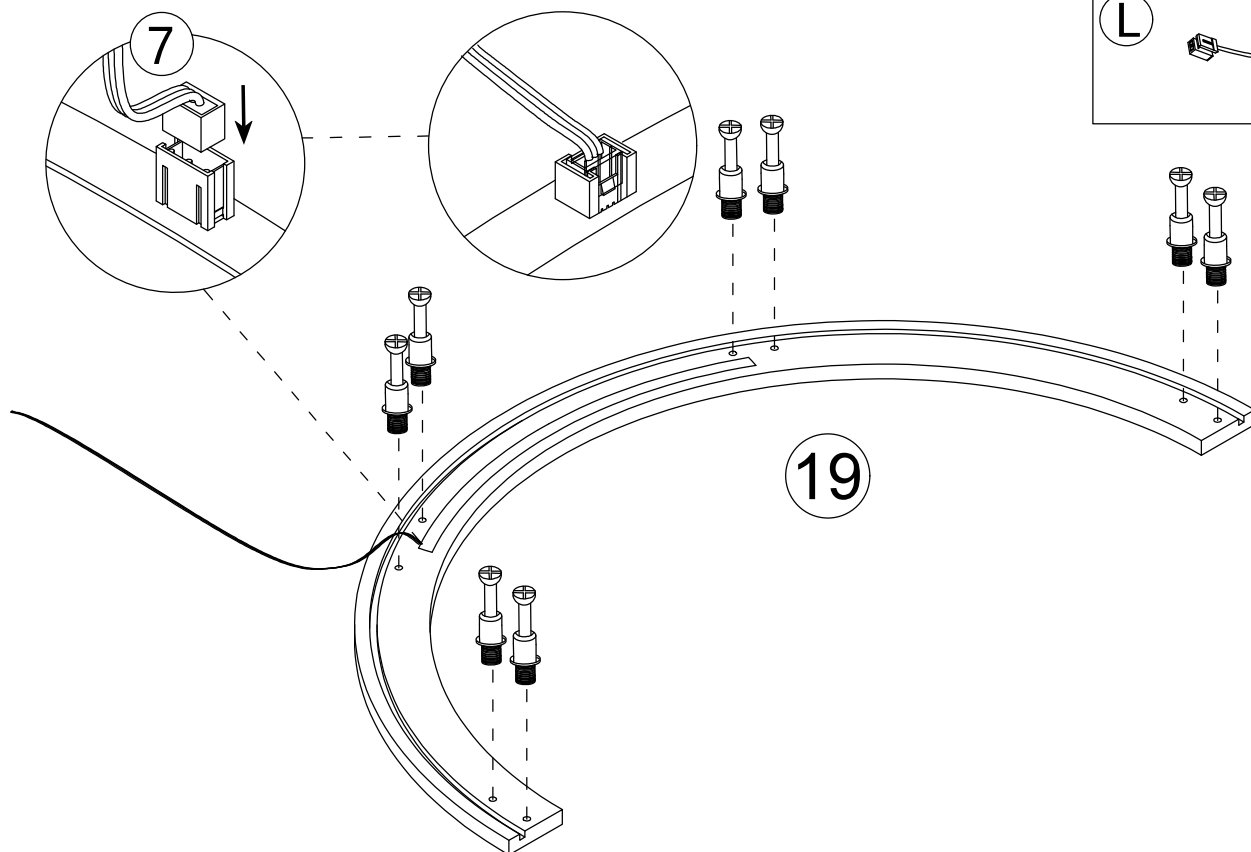

Step 24

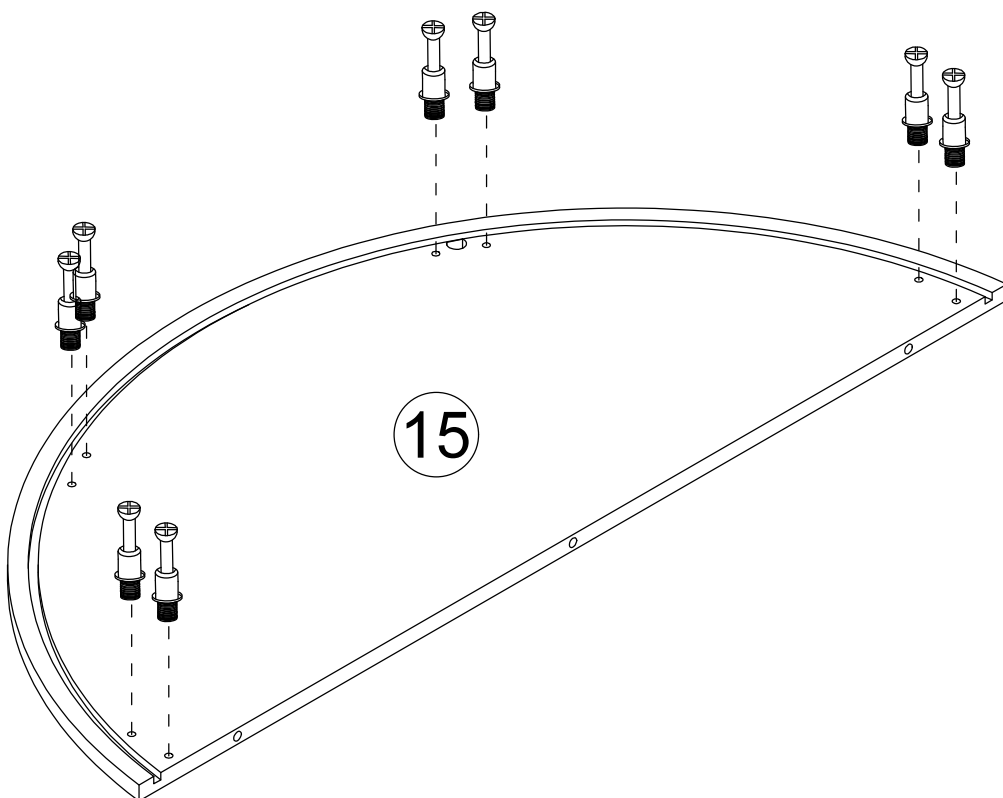


Step 25

B




x8

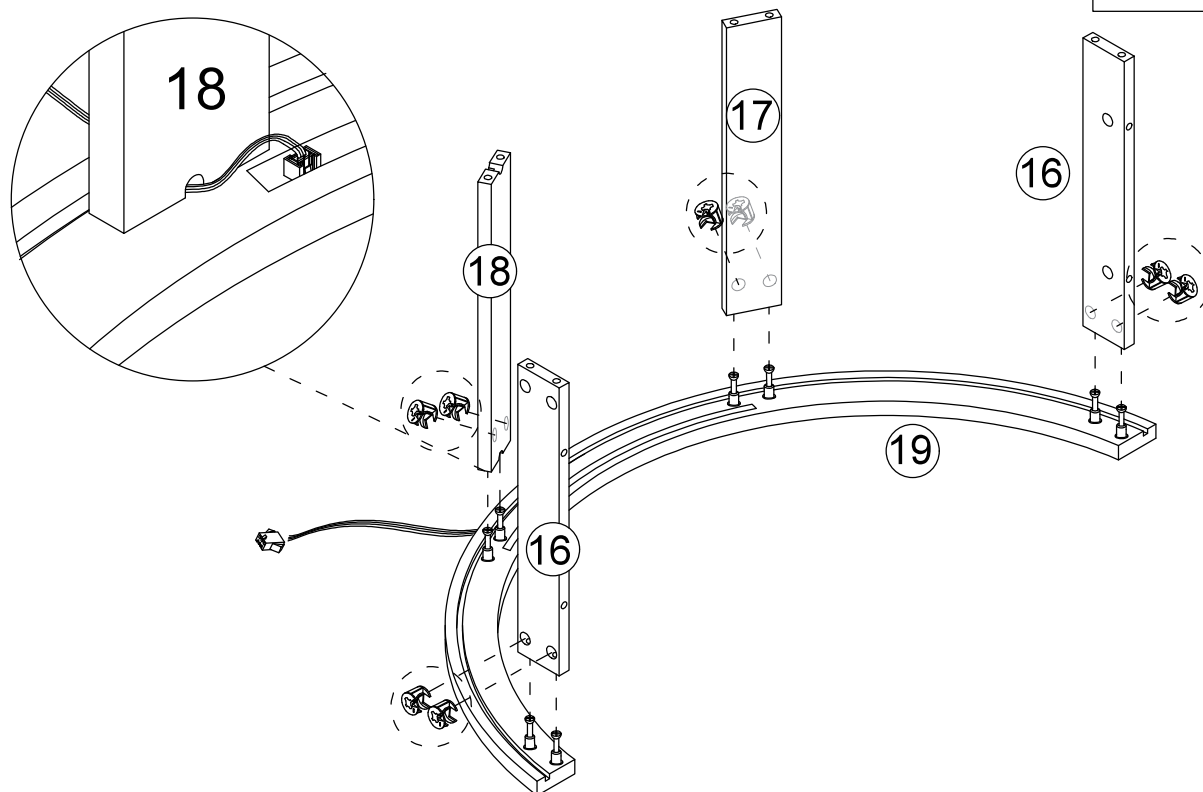


Thread the light wire through board 18 and tighten the nut

Step 26

J



x1

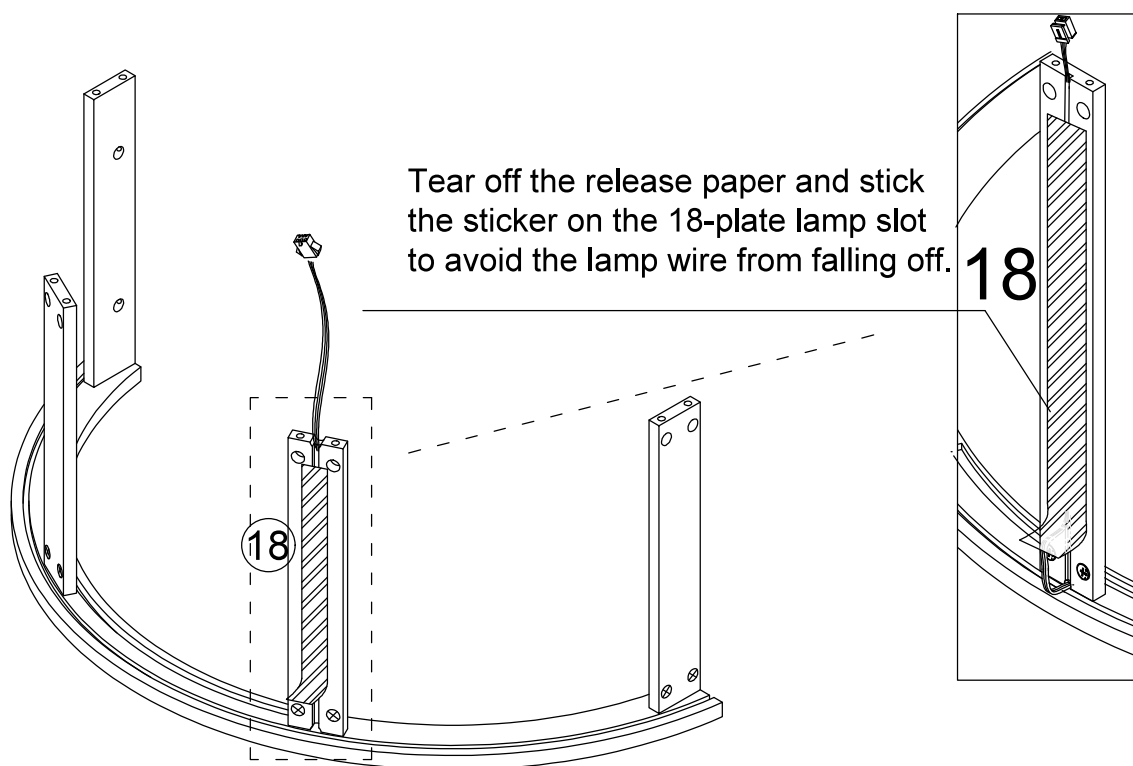

Tear off the release paper and stick the sticker on the 18-plate lamp slot to avoid the lamp wire from falling off.

18


19

Step 27

B




x8

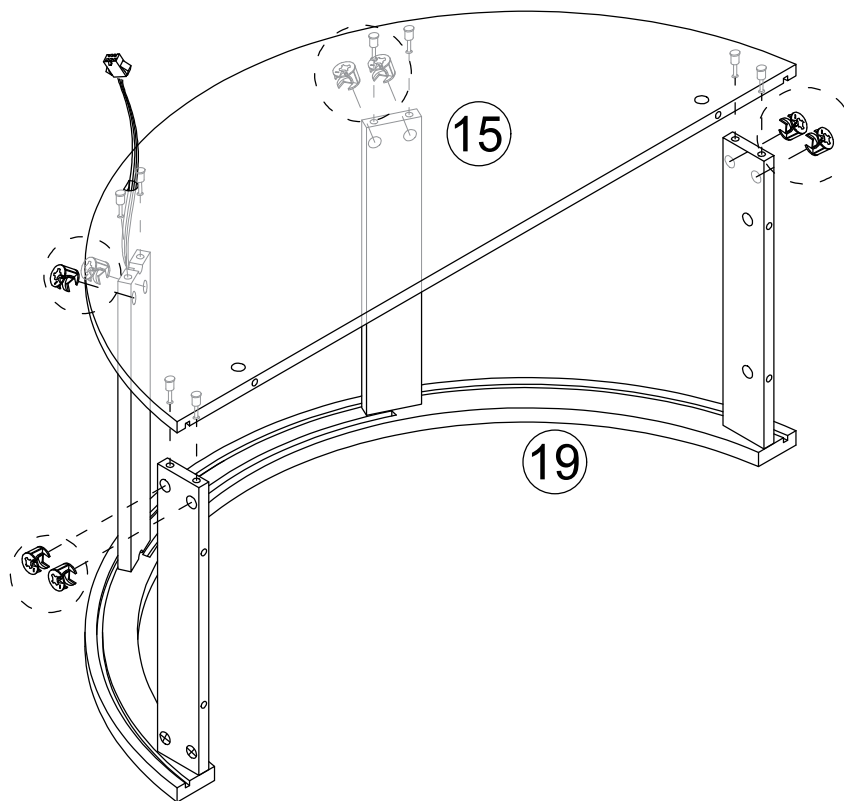


Step 28

A




x7

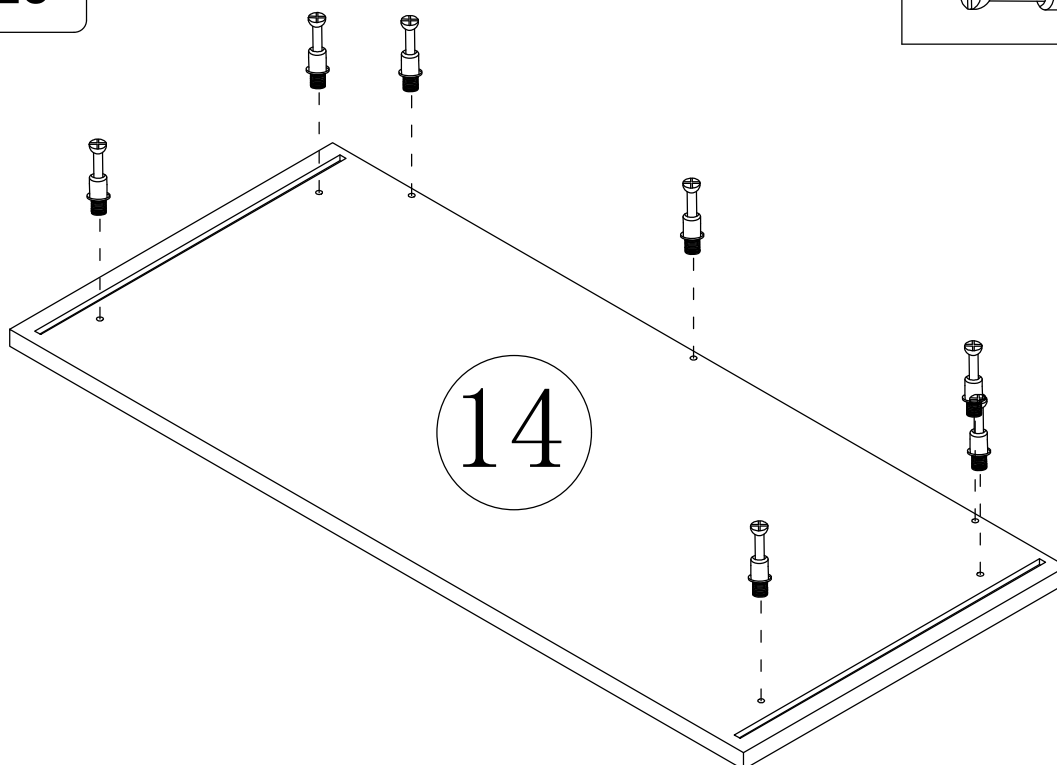


20

Step 29

Note: When installing the R plate, push the middle of the R plate by hand to push the R plate into the groove.


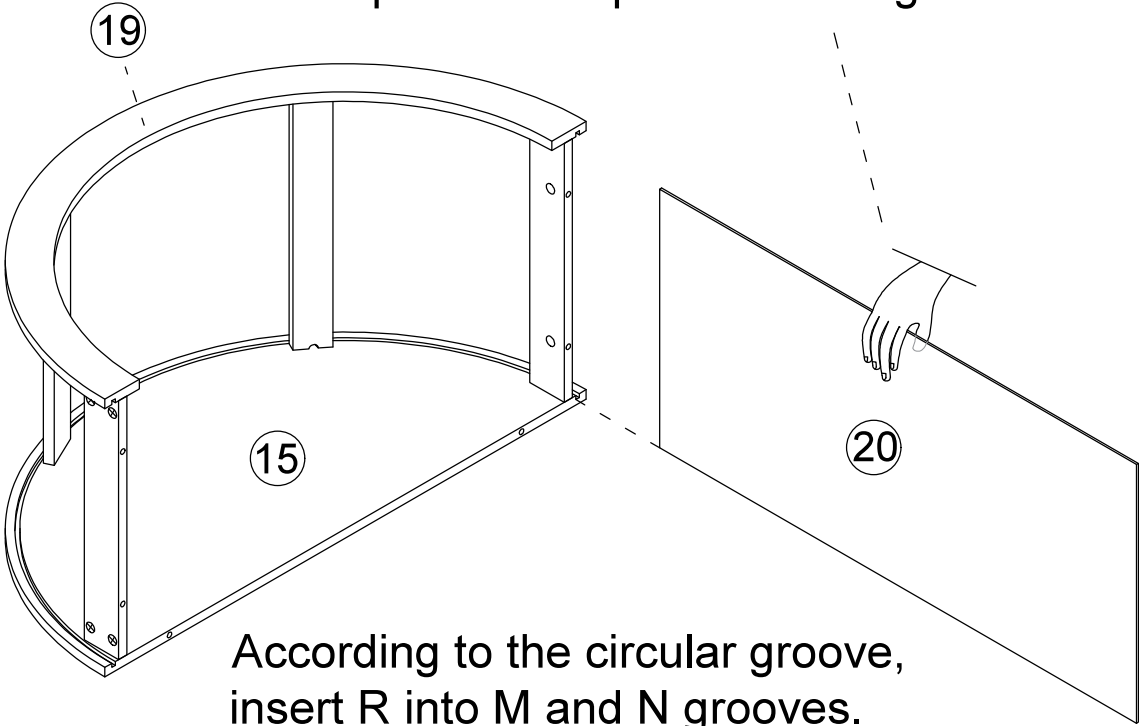


According to the circular groove,
insert R into M and N grooves.

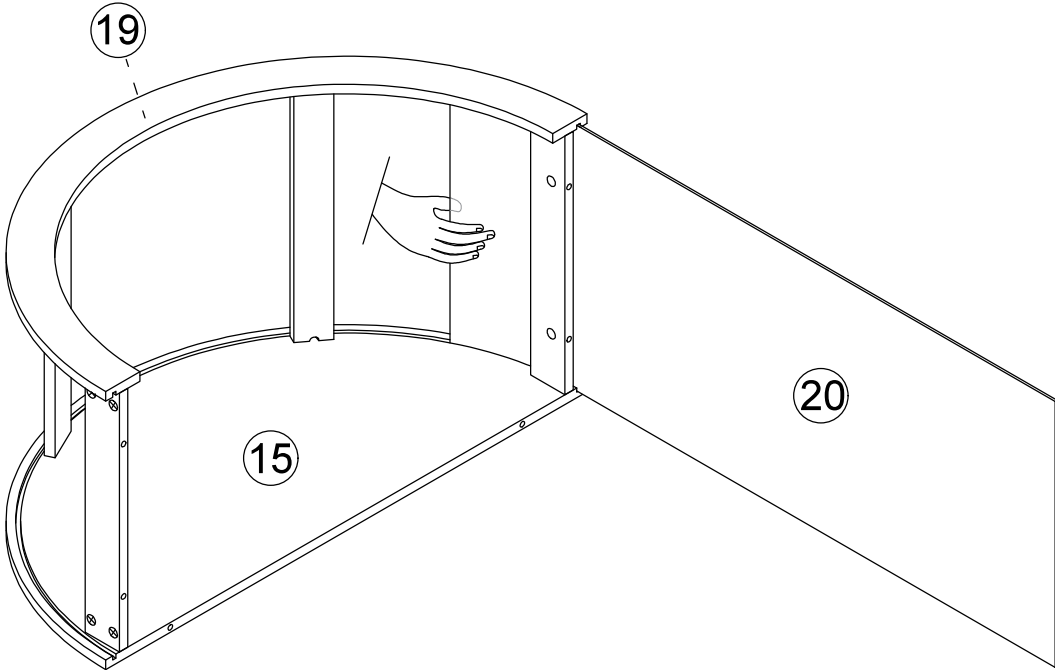


If it is difficult to push the R plate in, you can use the pull method.

Step 30

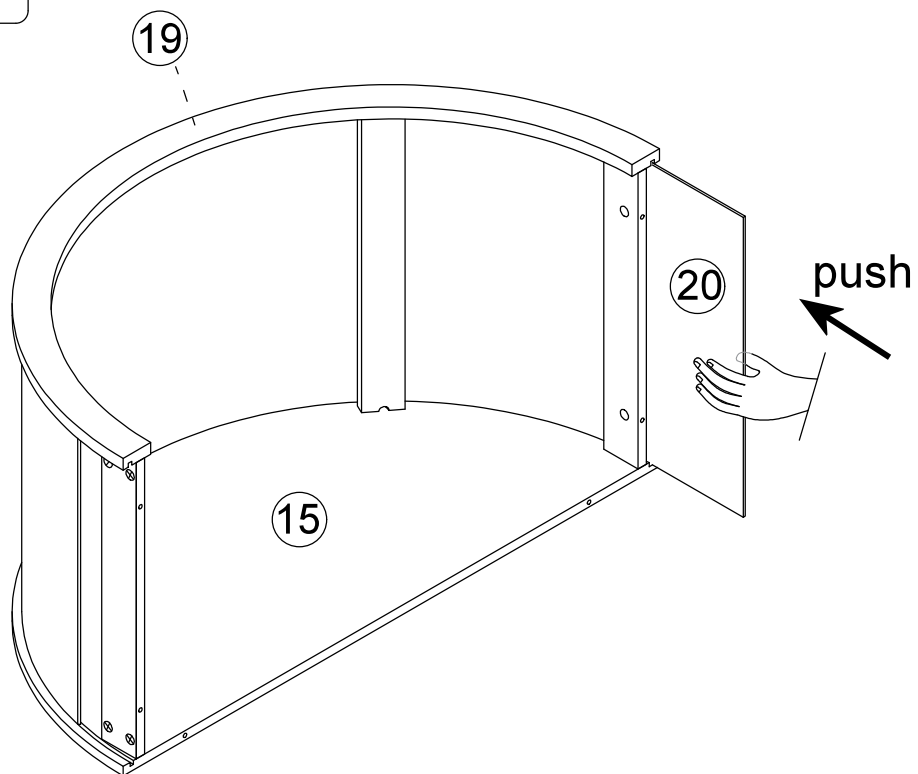

Need to flip over

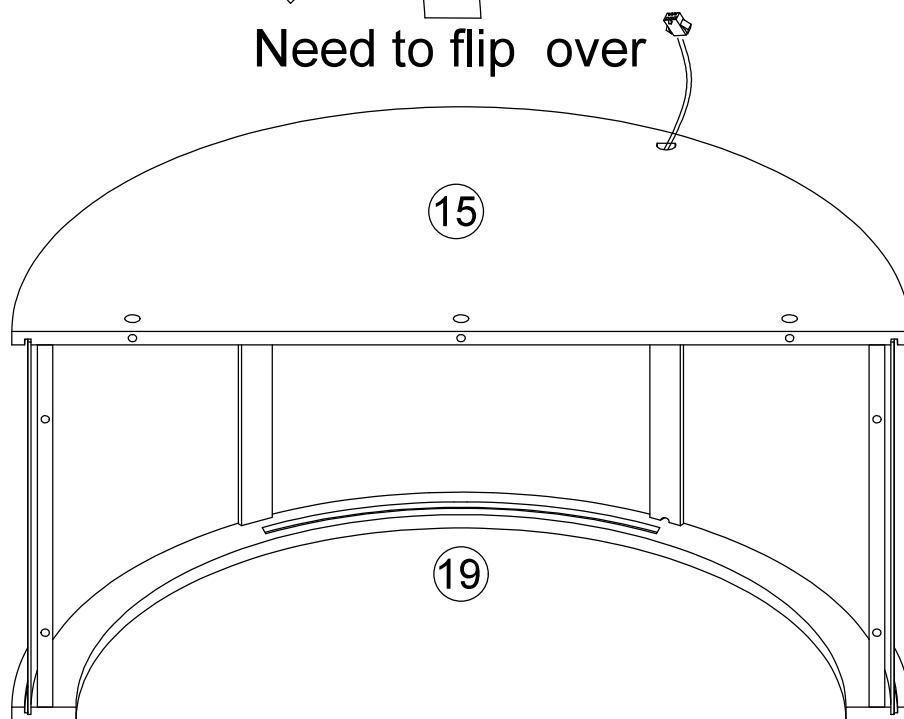


Step 31

2



x3

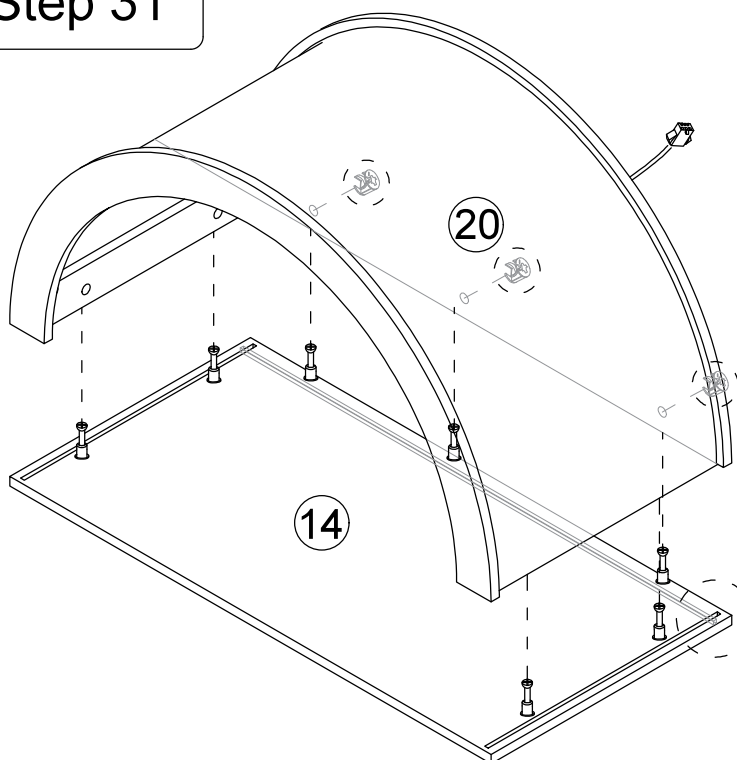

When installing the N plate, pay attention to the front and back, and there is a groove under the L plate.


Step 32

2



x4



Note: After installing the R board, you need to pat the backboards on both sides into the grooves of the L board by hand.

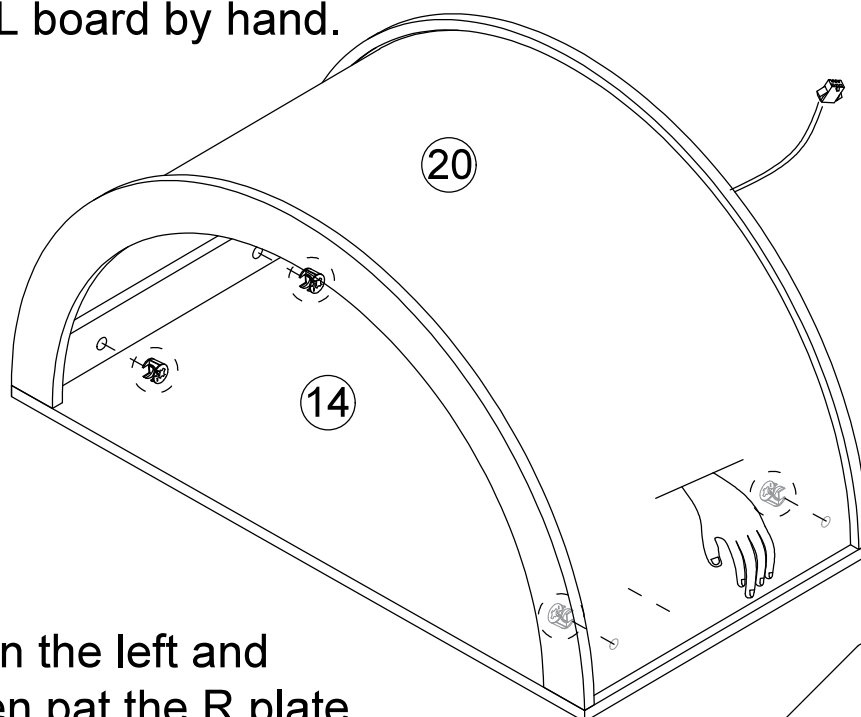



Note: pat the R plate on the left and then screw the nut, then pat the R plate on the right and screw the nut.

23

Step 33

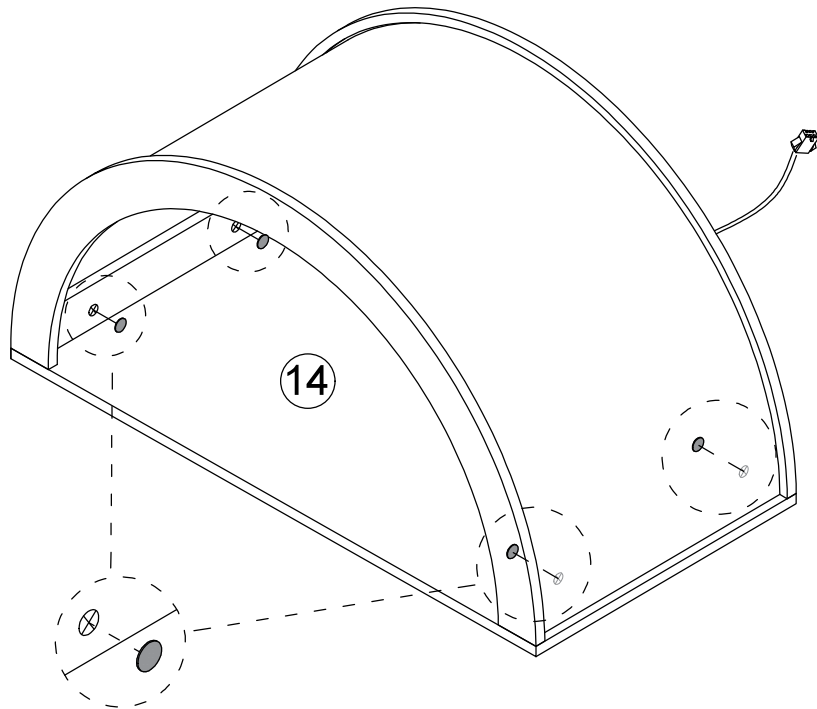

Step 34

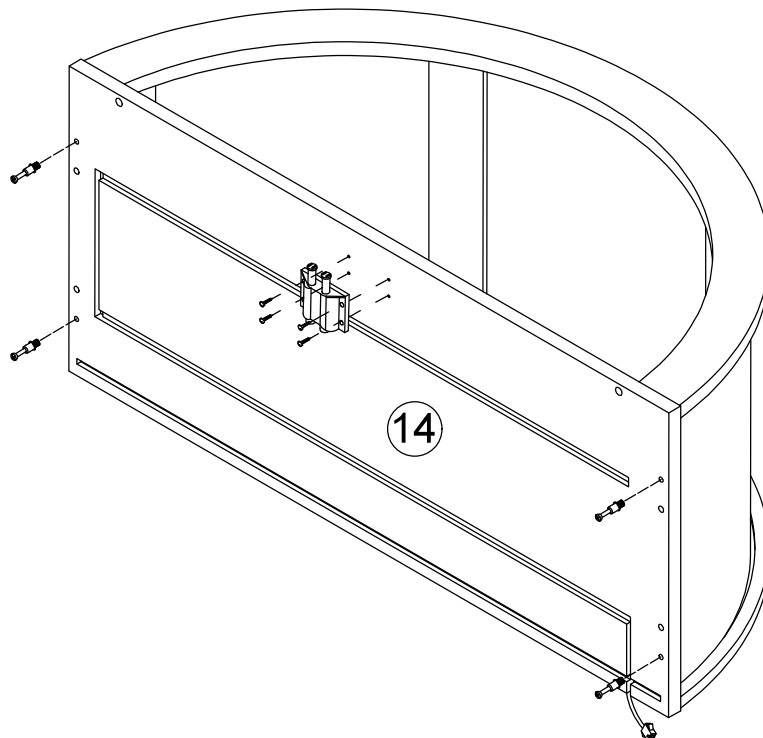


Step 35

B




x4

C




x4

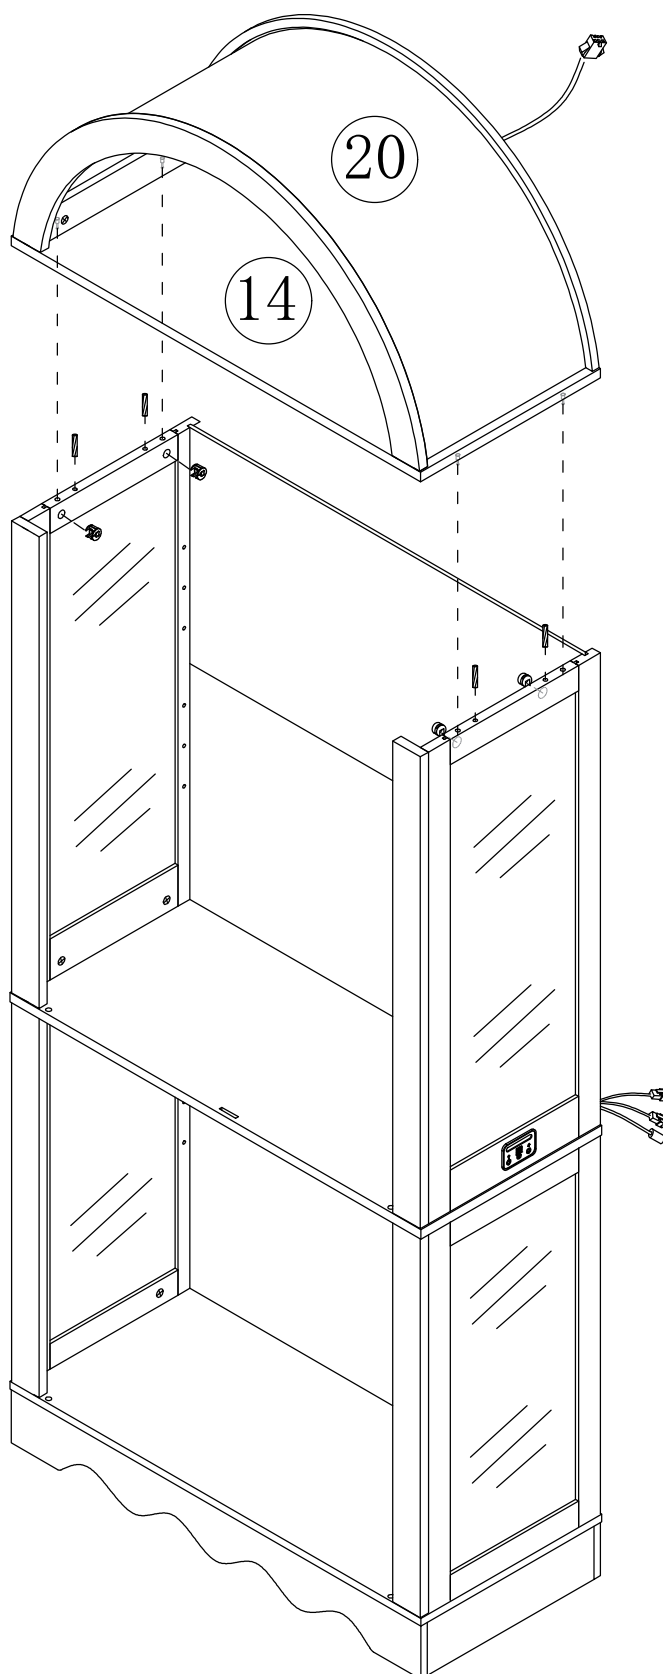


Step 36


G



x12

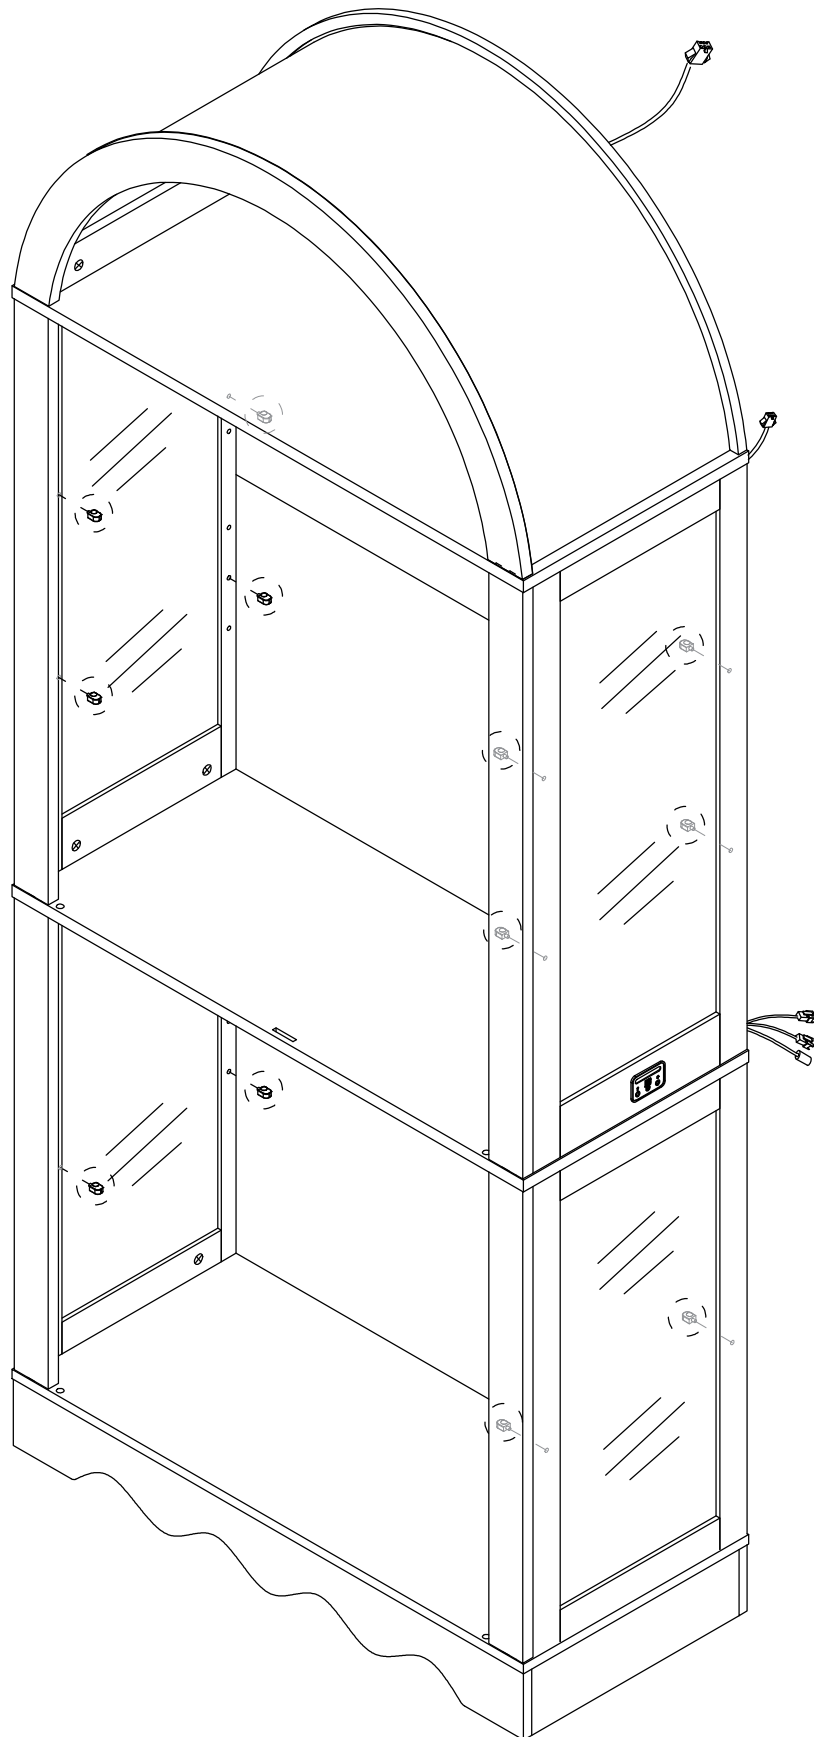

Step 37

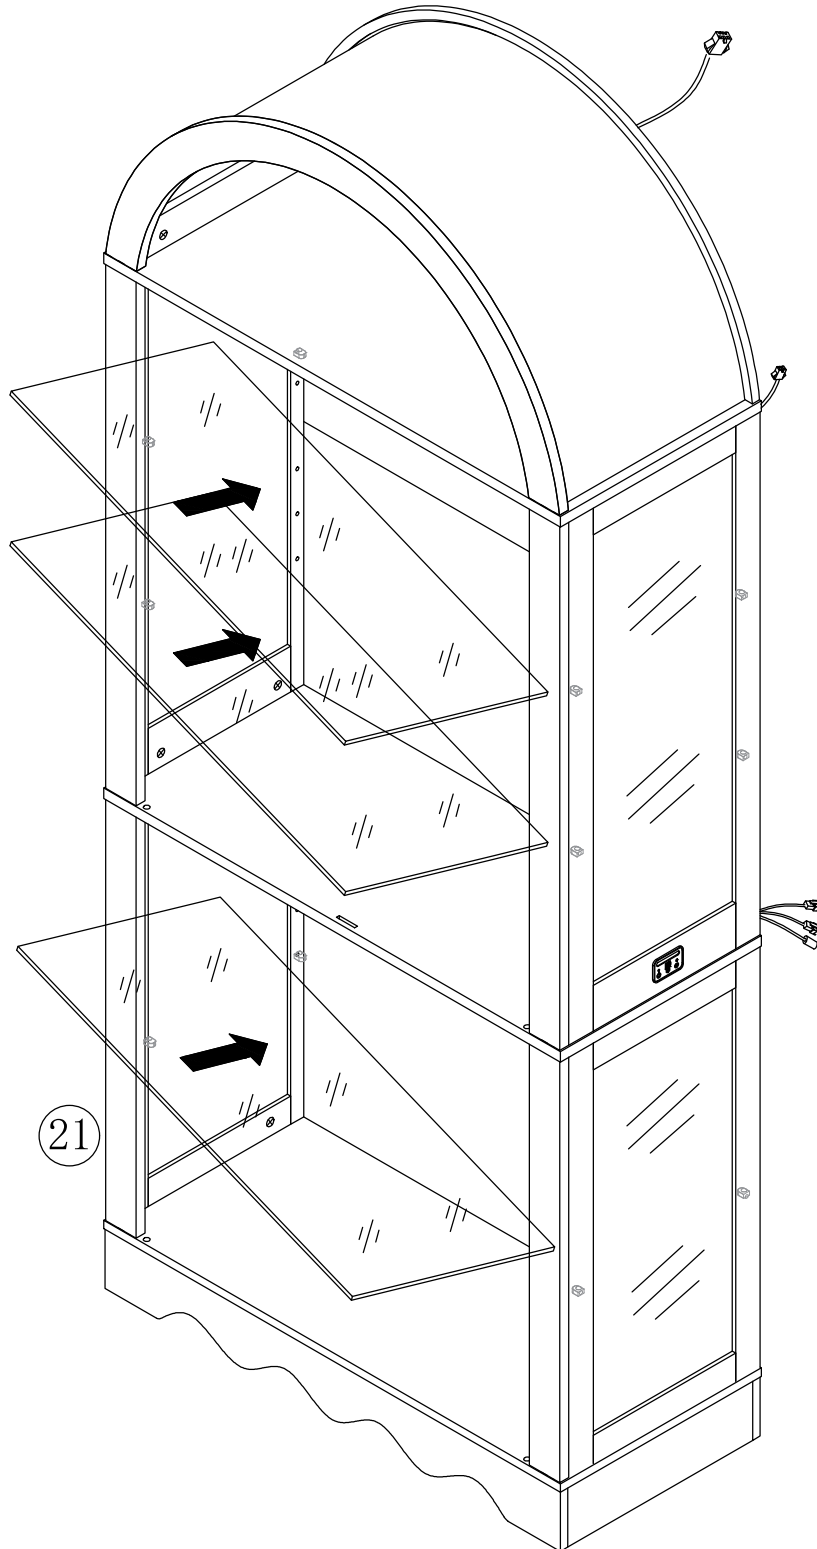


When installing the glass shelf, be sure to insert it into the cabinet at an angle.



Please handle the glass with care and place it gently.

Step 38



First, loosen
the screws.



H




1. Take out the white foam pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

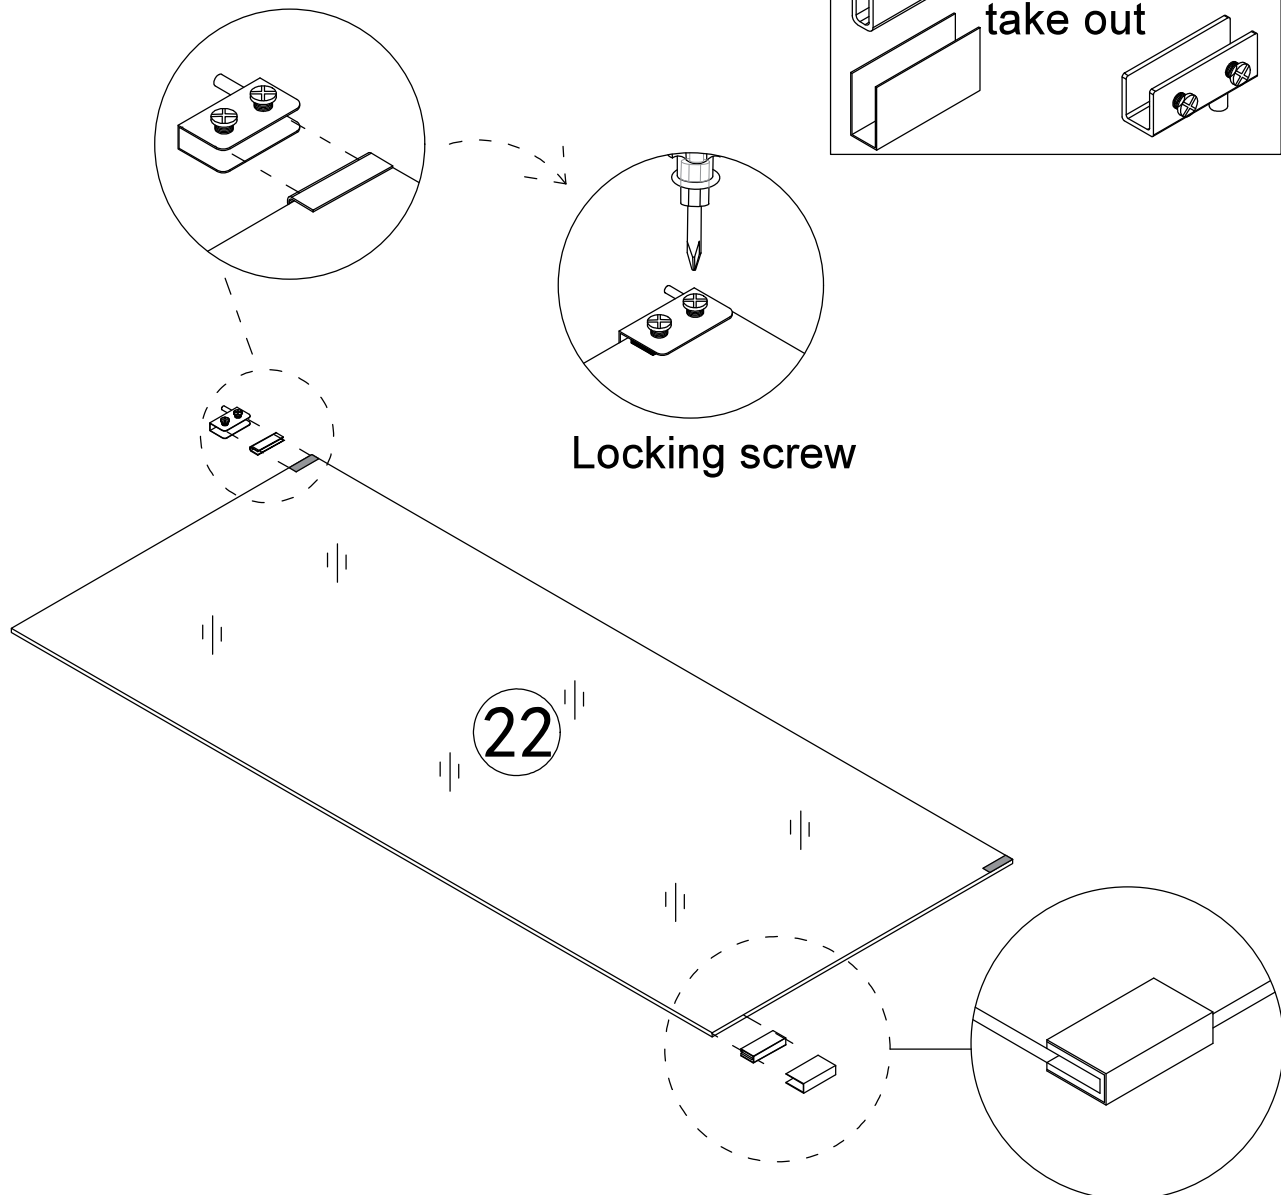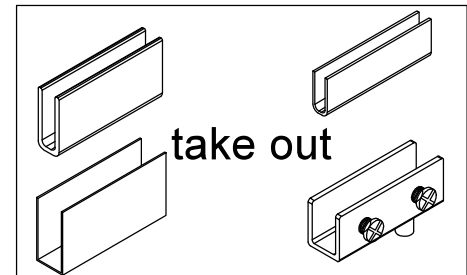


Step 39


First, loosen
the screws.



H





x1






x1



1. Take out the white foam pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

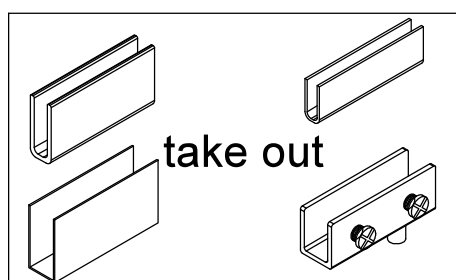

Locking screw

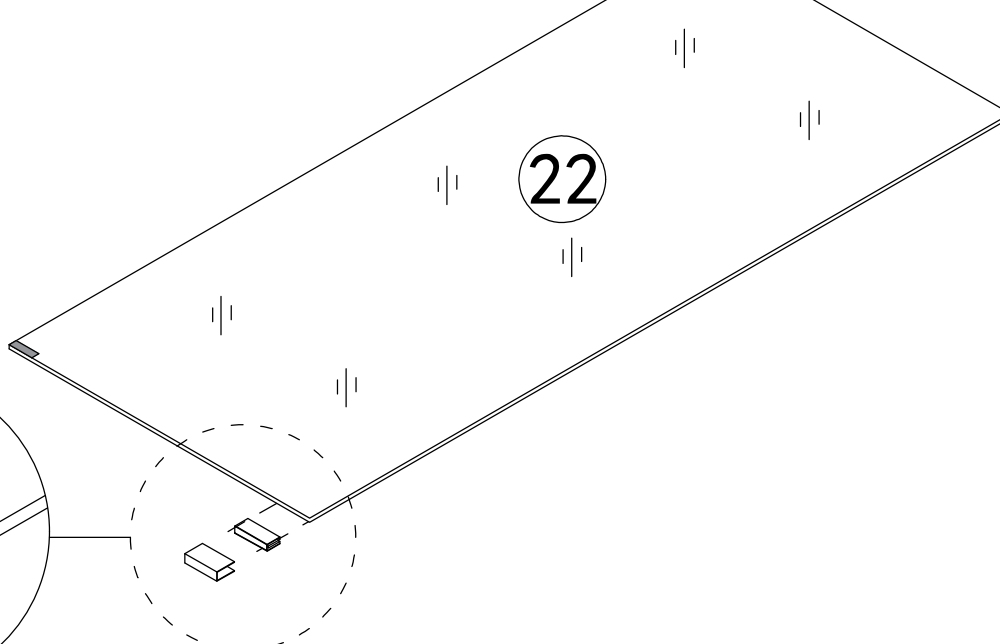

Step 40

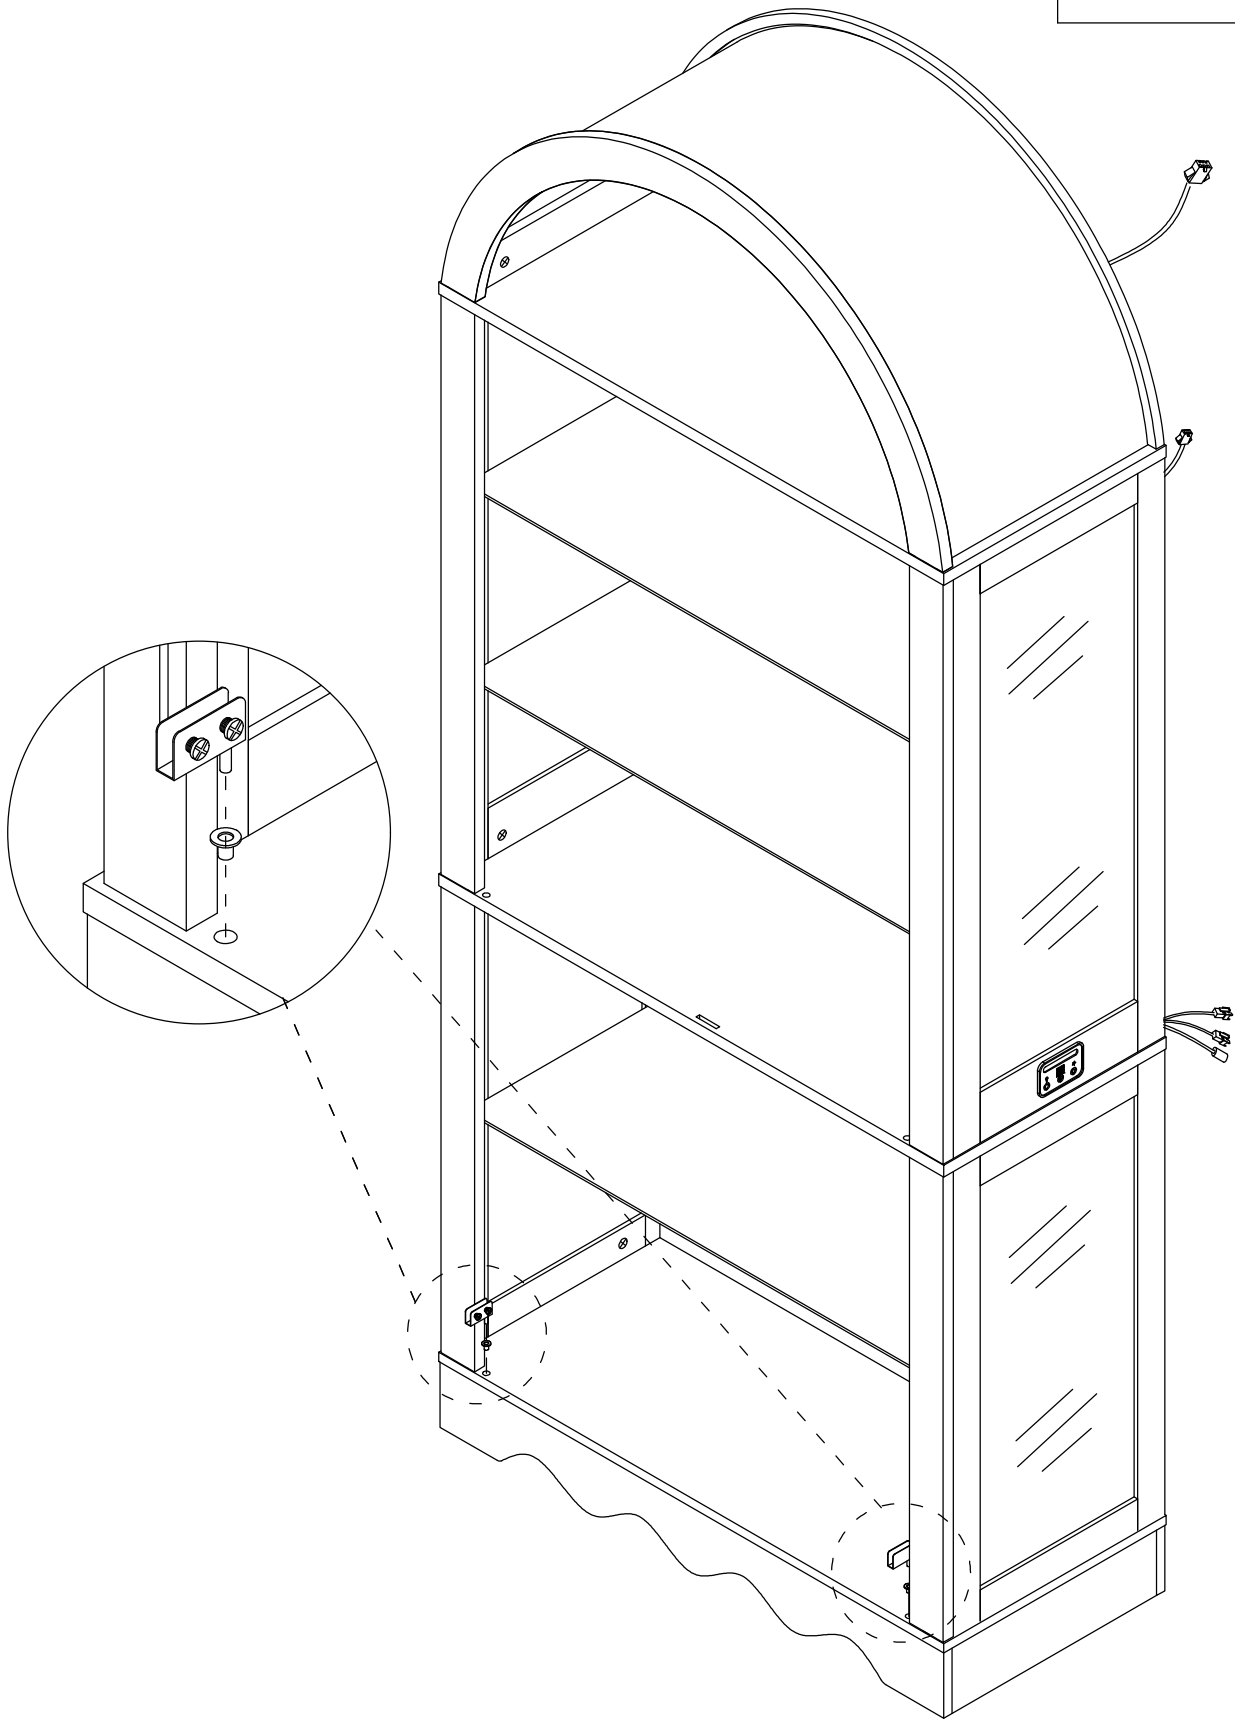

Step 41


Pay attention to the direction of the door hinge during installation

H





x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first




second

Insert the glass into the door hinge's slot.



third


Locking screw

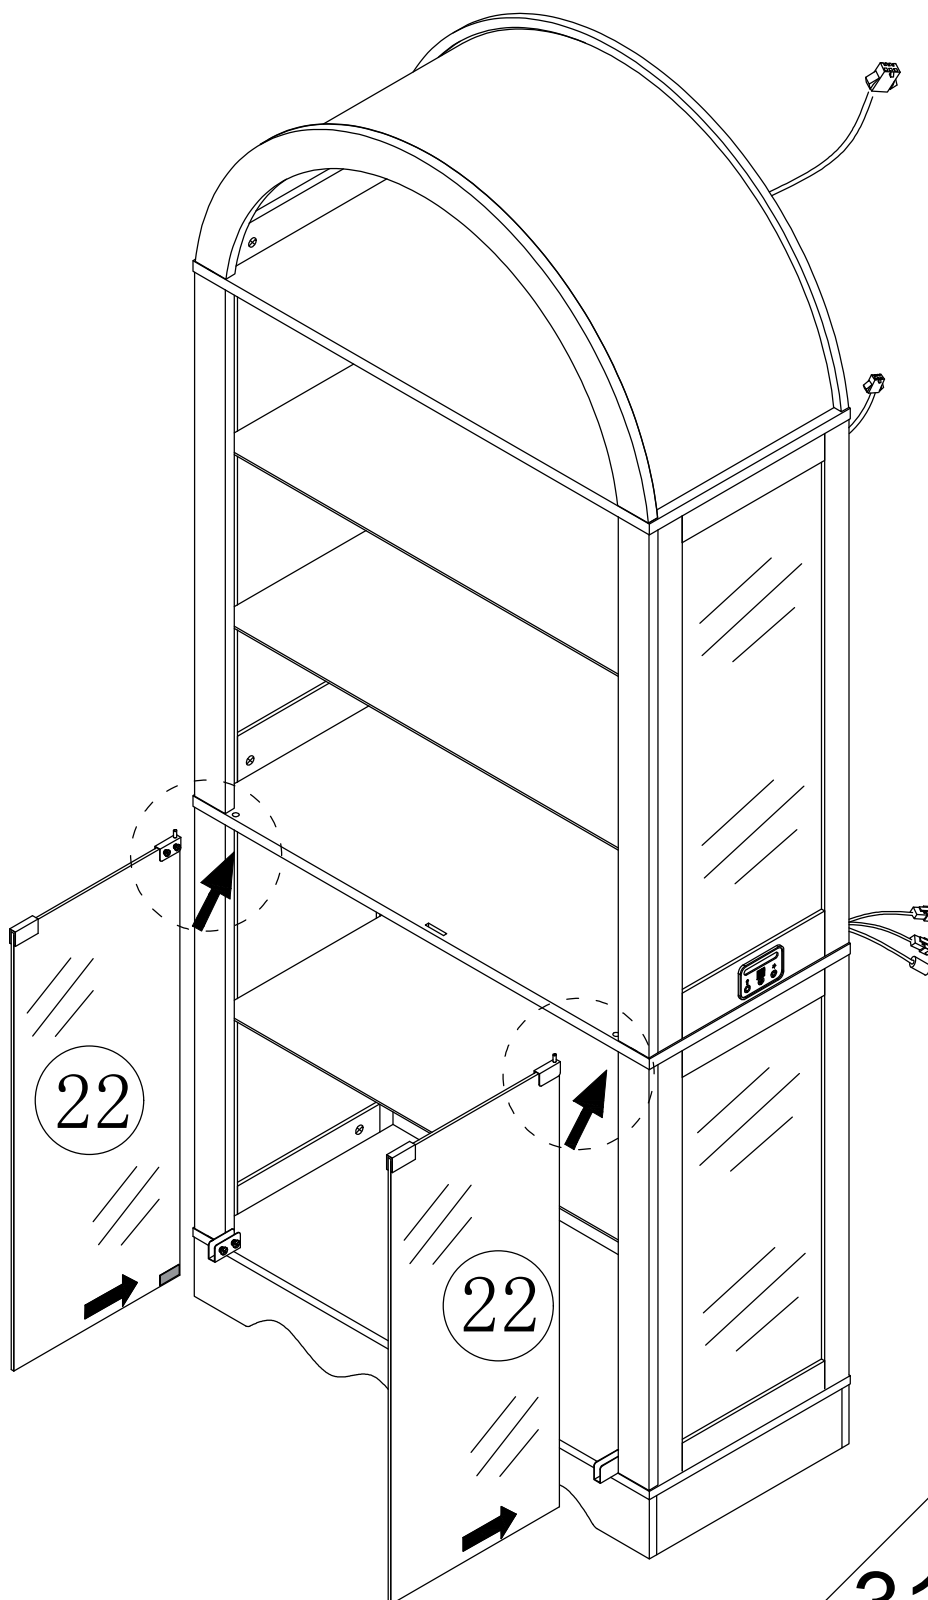


31

Step 42


First, loosen
the screws.



H




1. Take out the white foam pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

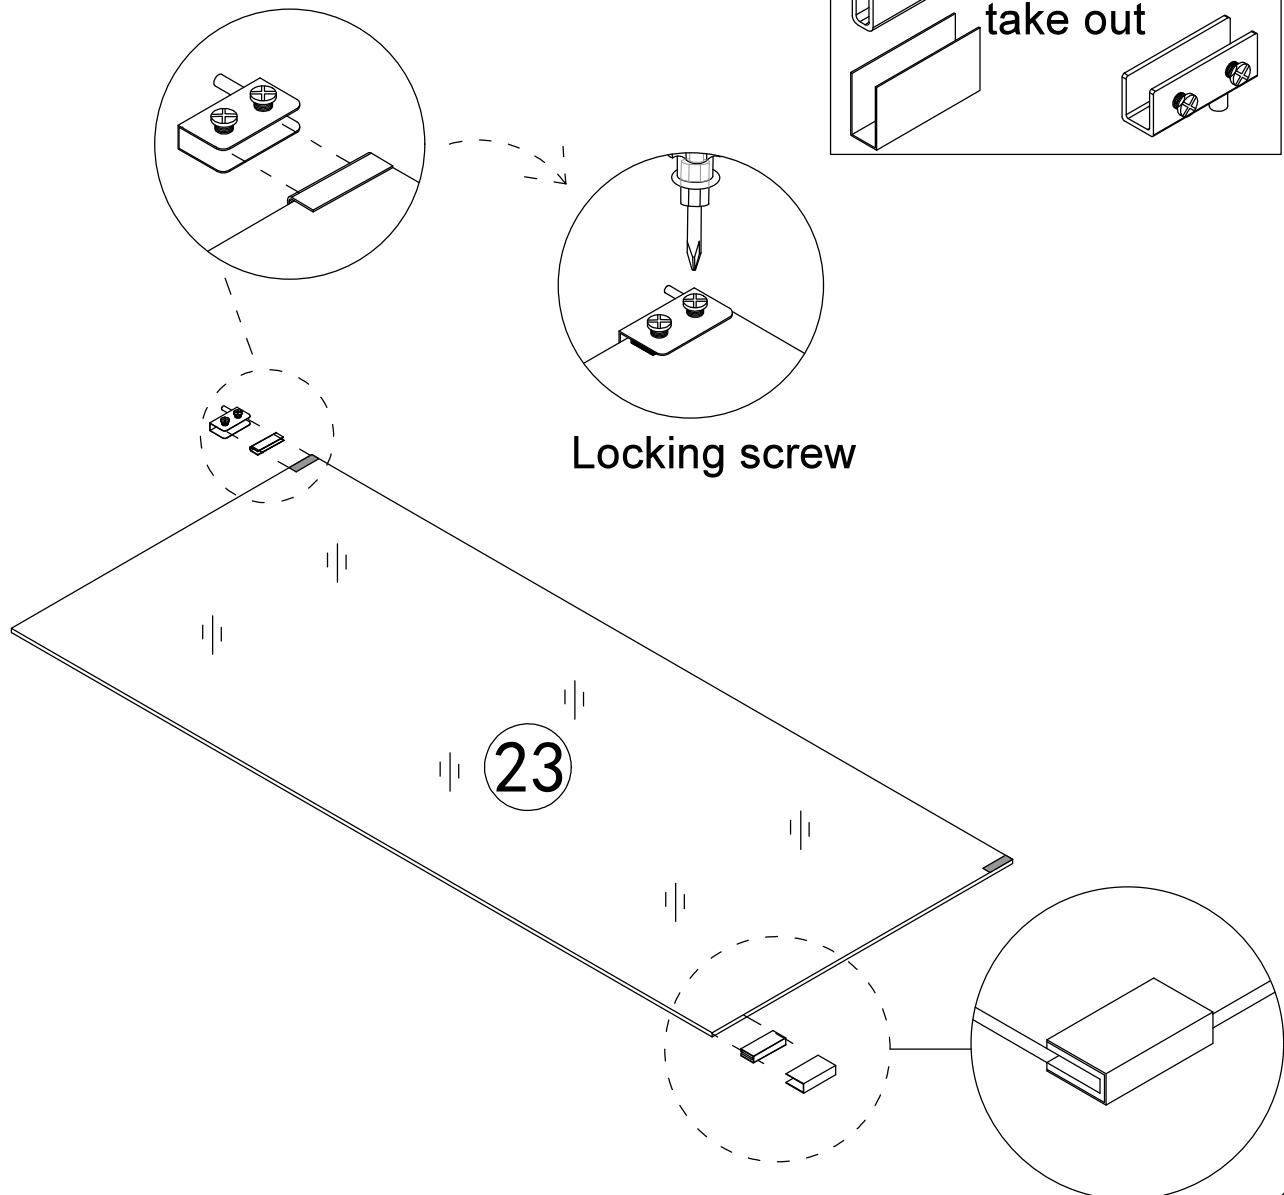


Step 43


First, loosen
the screws.



H





x1






x1




1. Take out the white foam pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

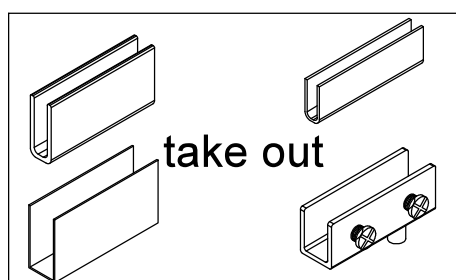

Locking screw

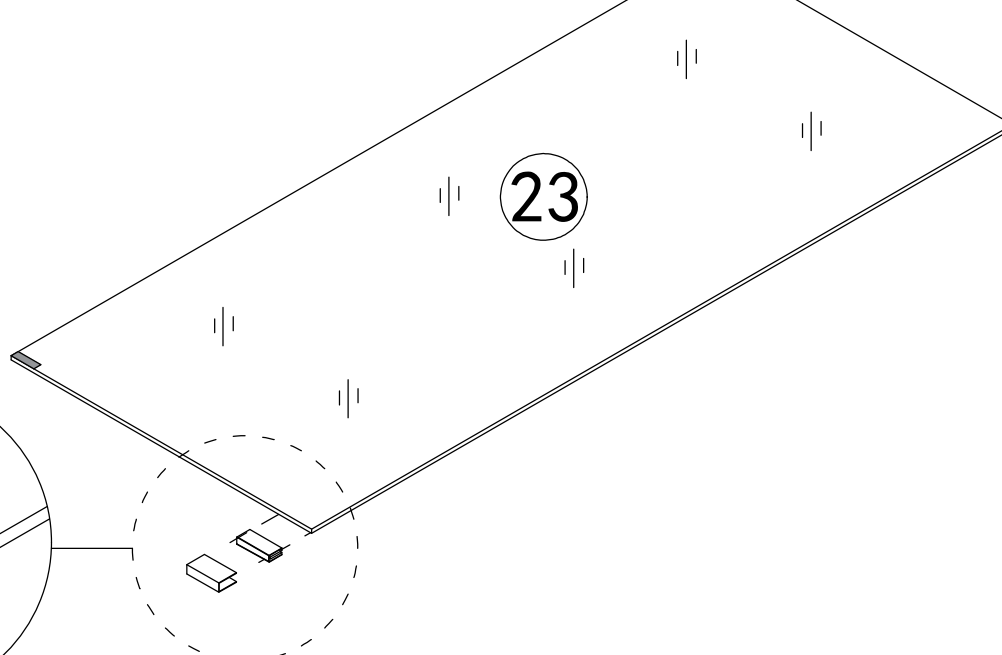

Step 44

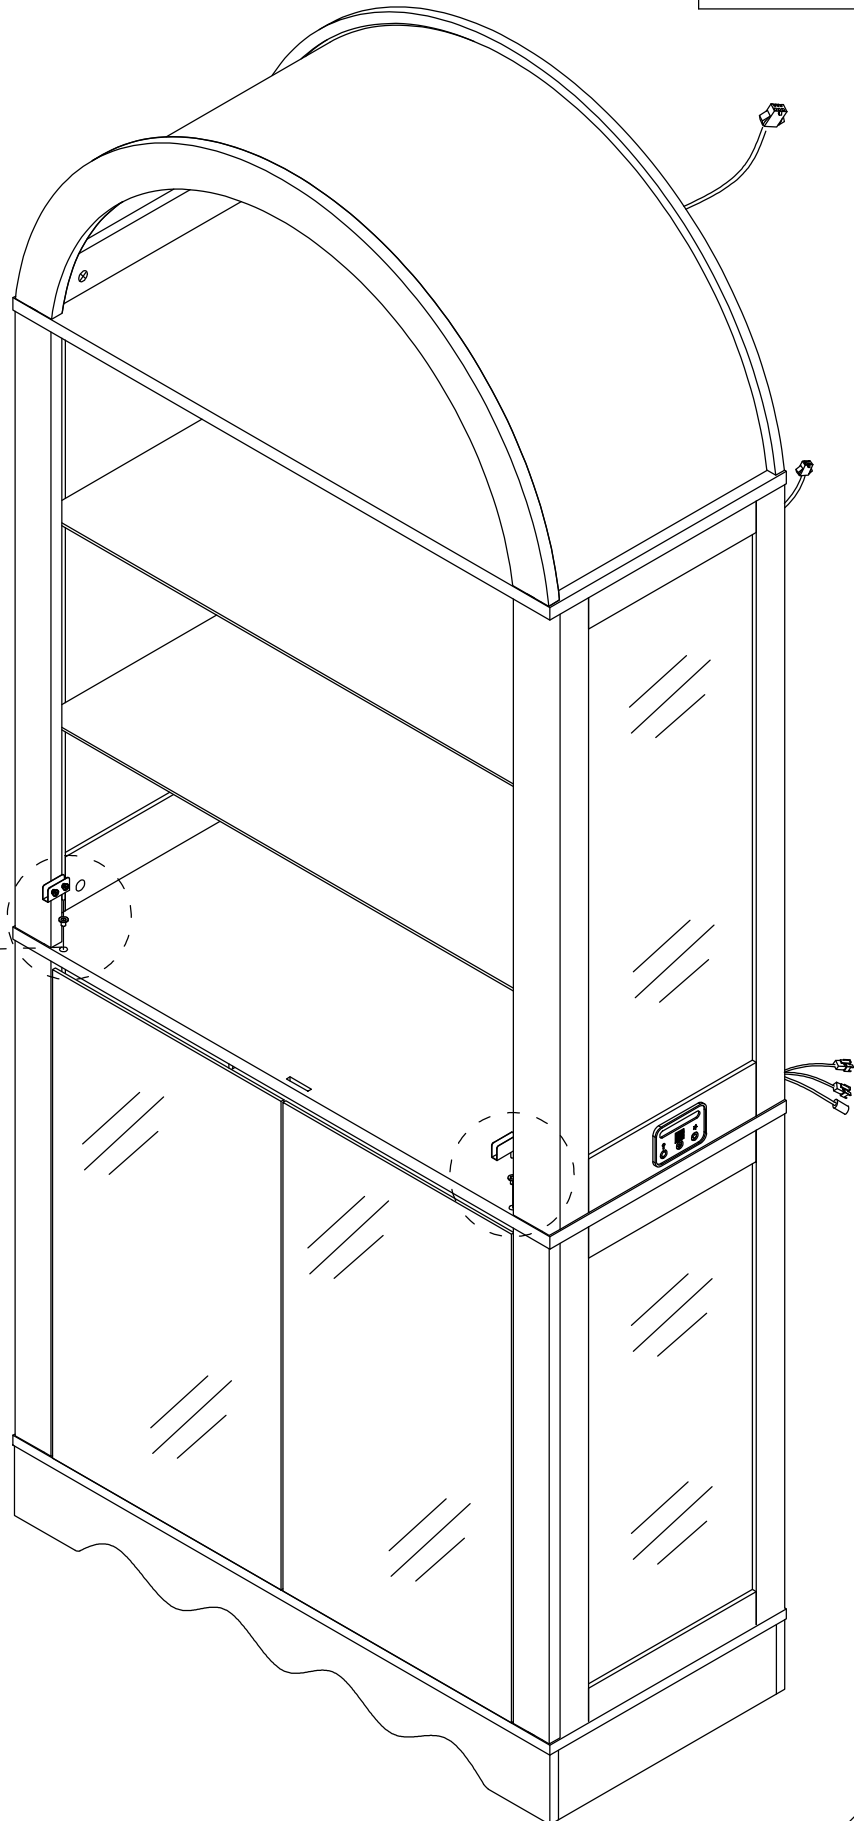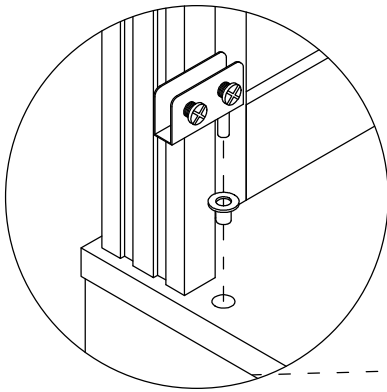

Step 45


Pay attention to the direction of the door hinge during installation

H





x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first




second

Insert the glass into the door hinge's slot.




third


Locking screw

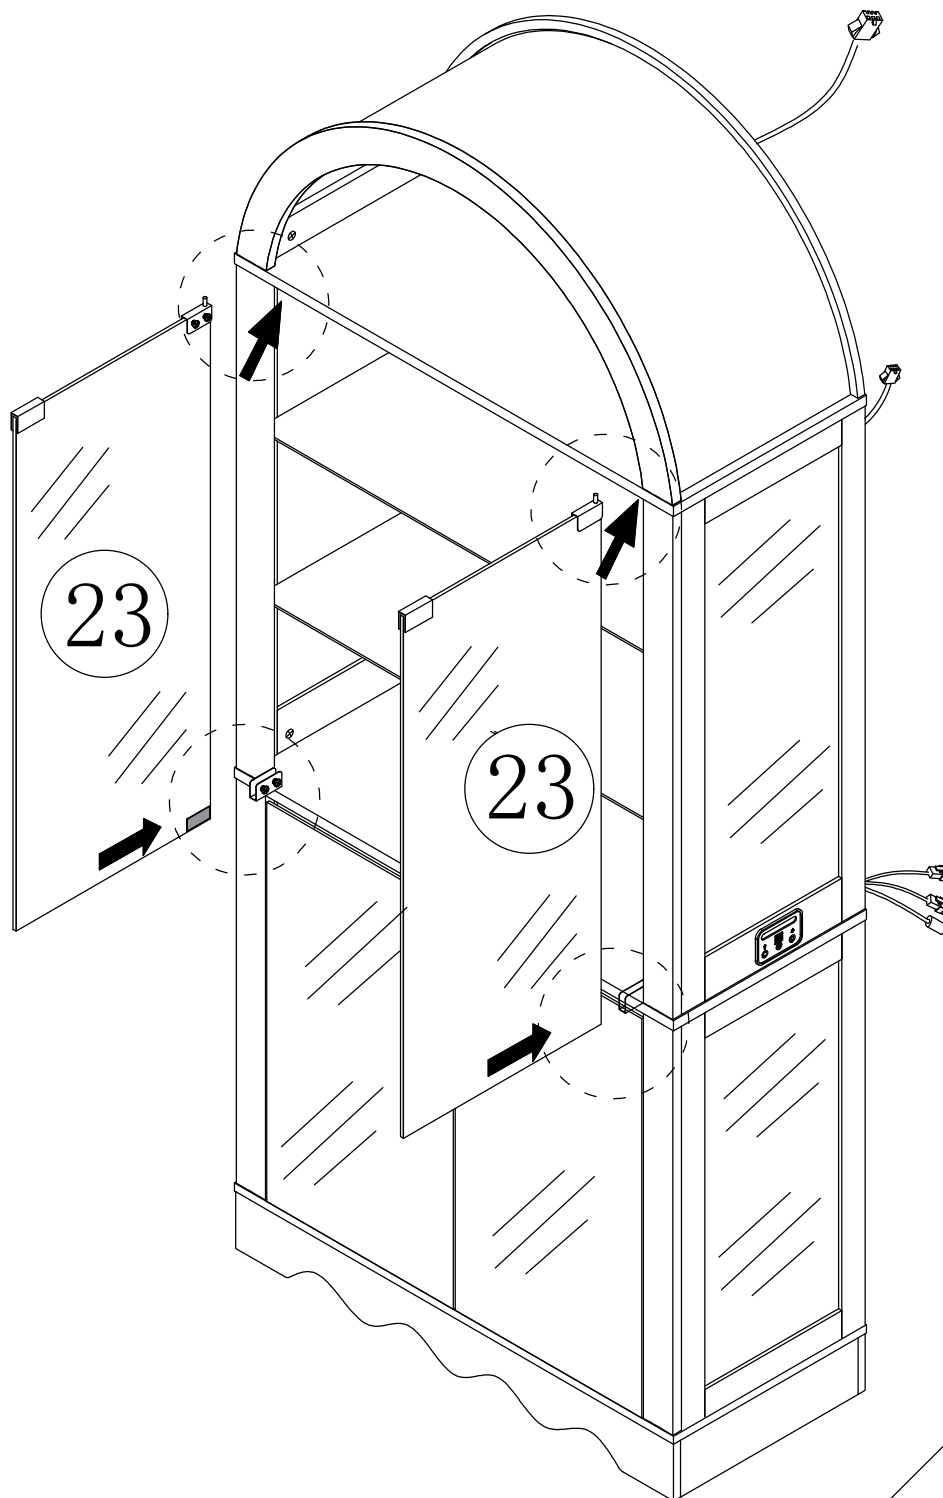

Tip: Turning the door lock to the right will close it

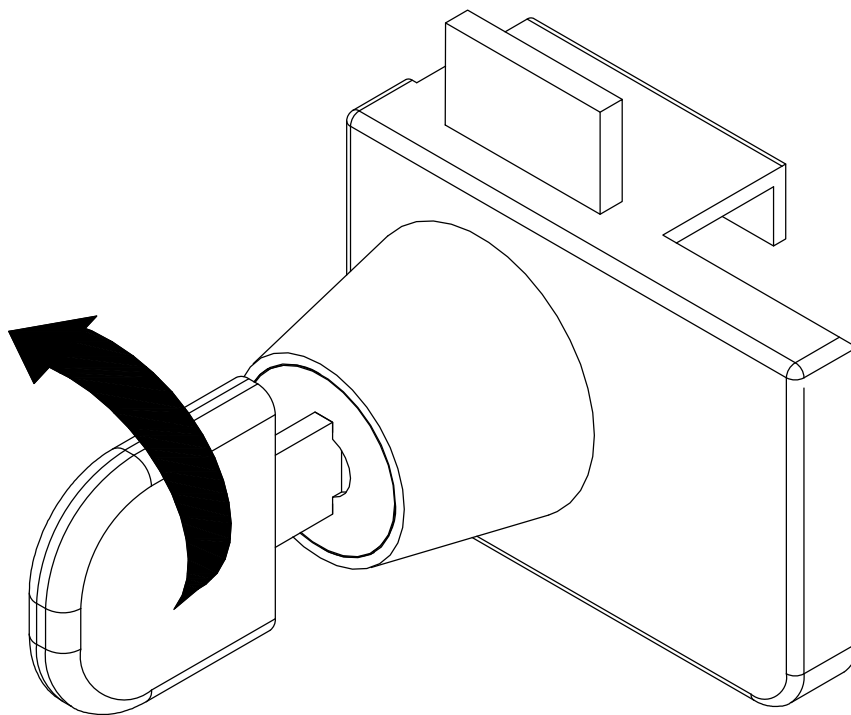


Tip: Turning the door lock to the left opens it

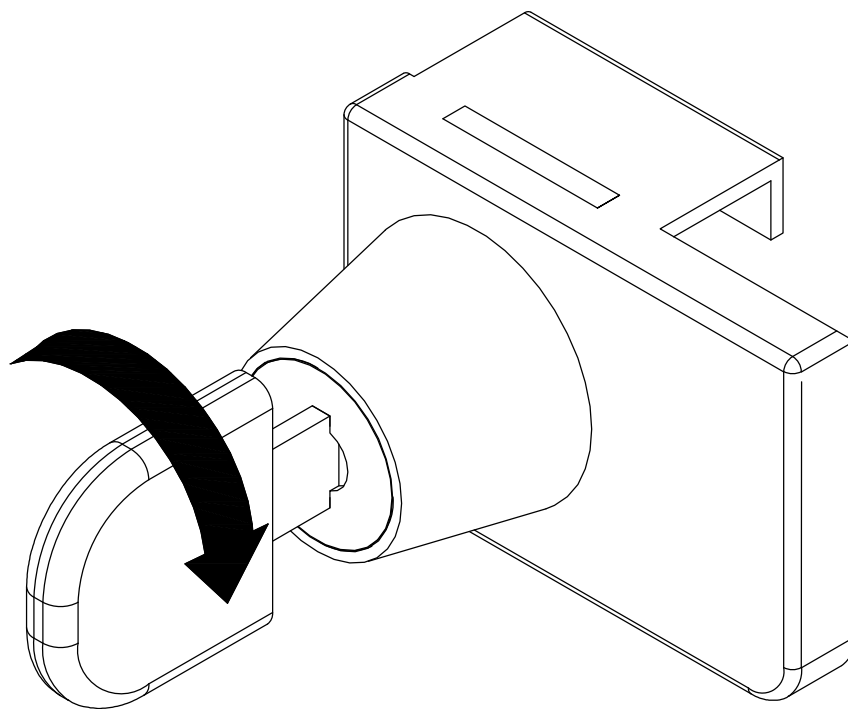


Step 46


1




x1

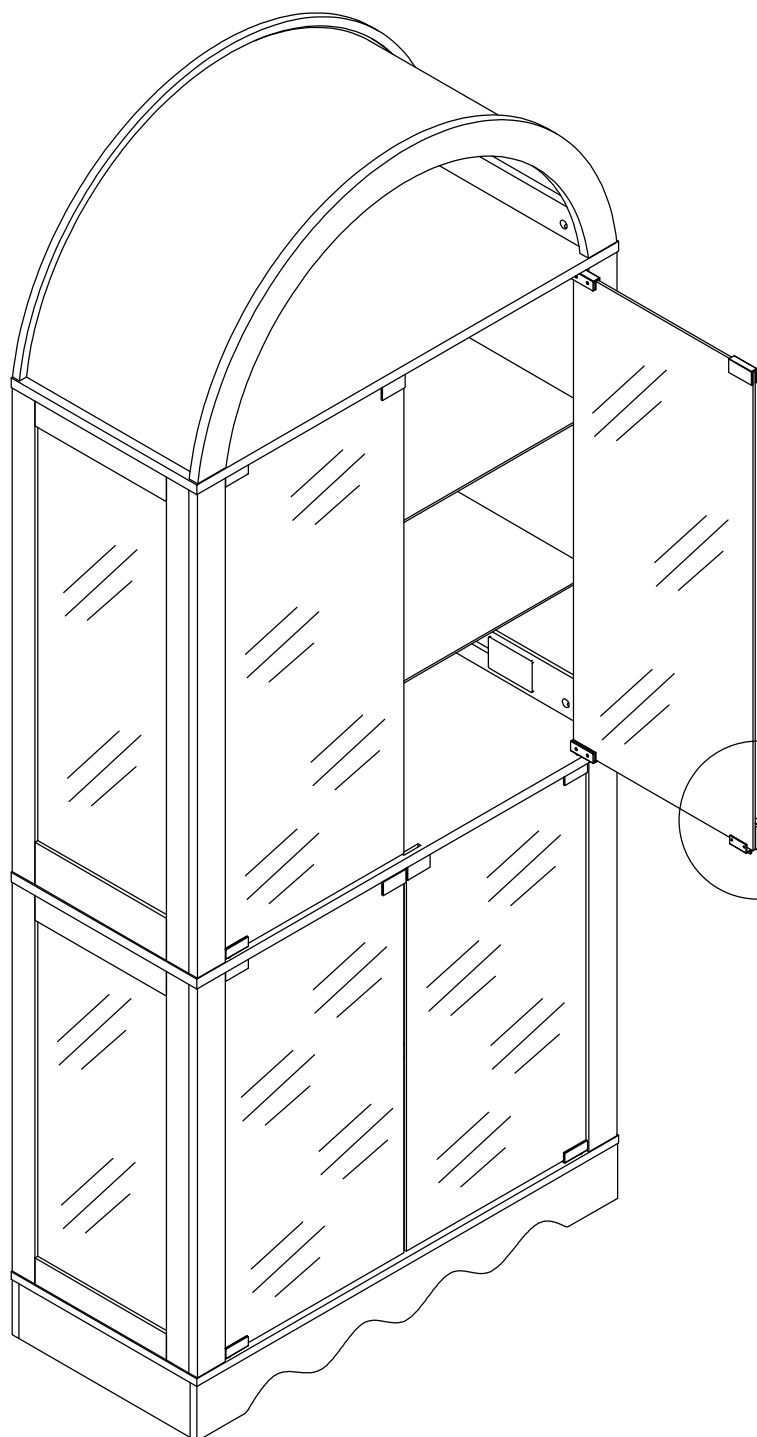

first

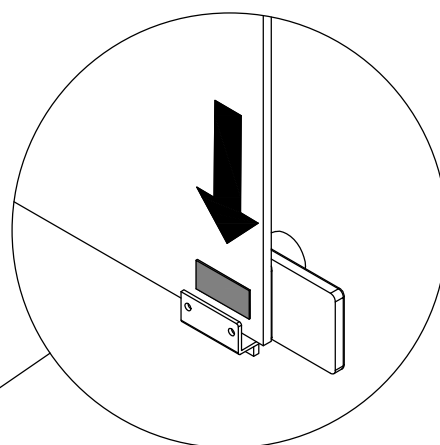


second


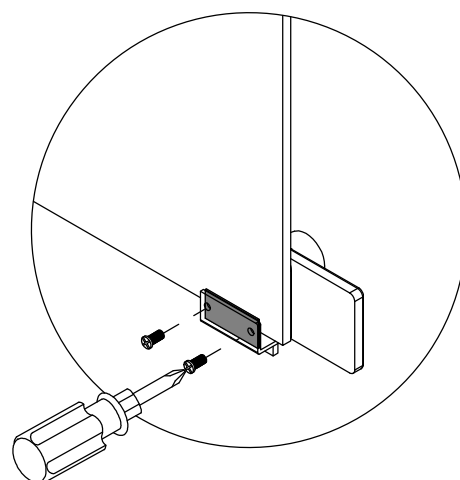


Step 47

Open the glass door




Close the glass door

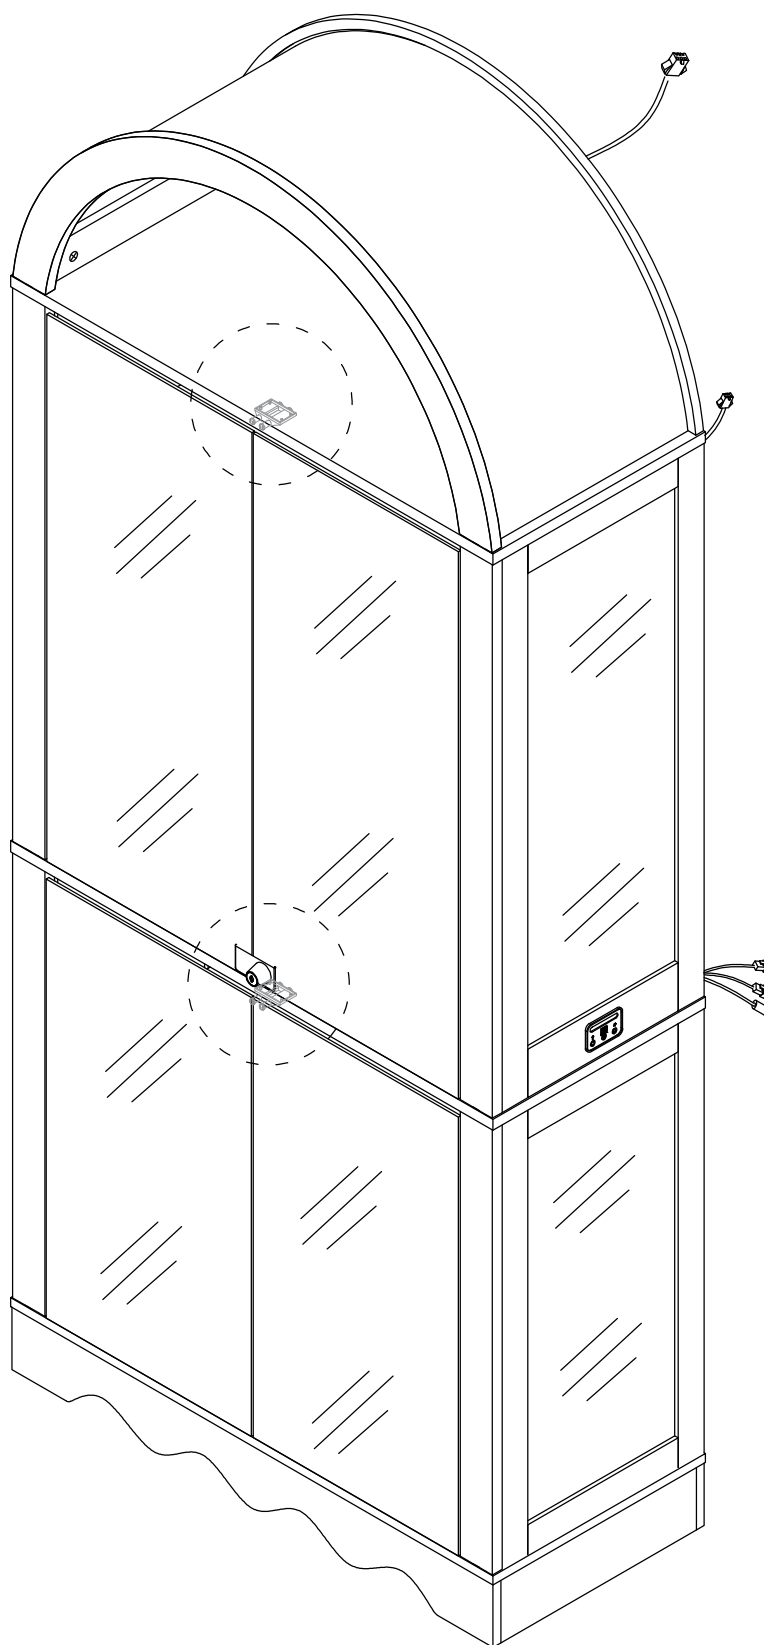
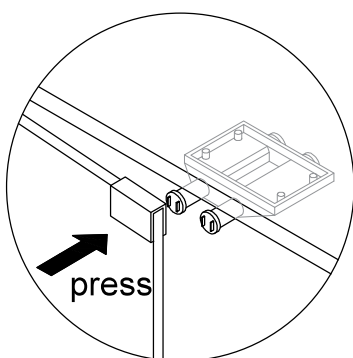


Step 48

E






x16

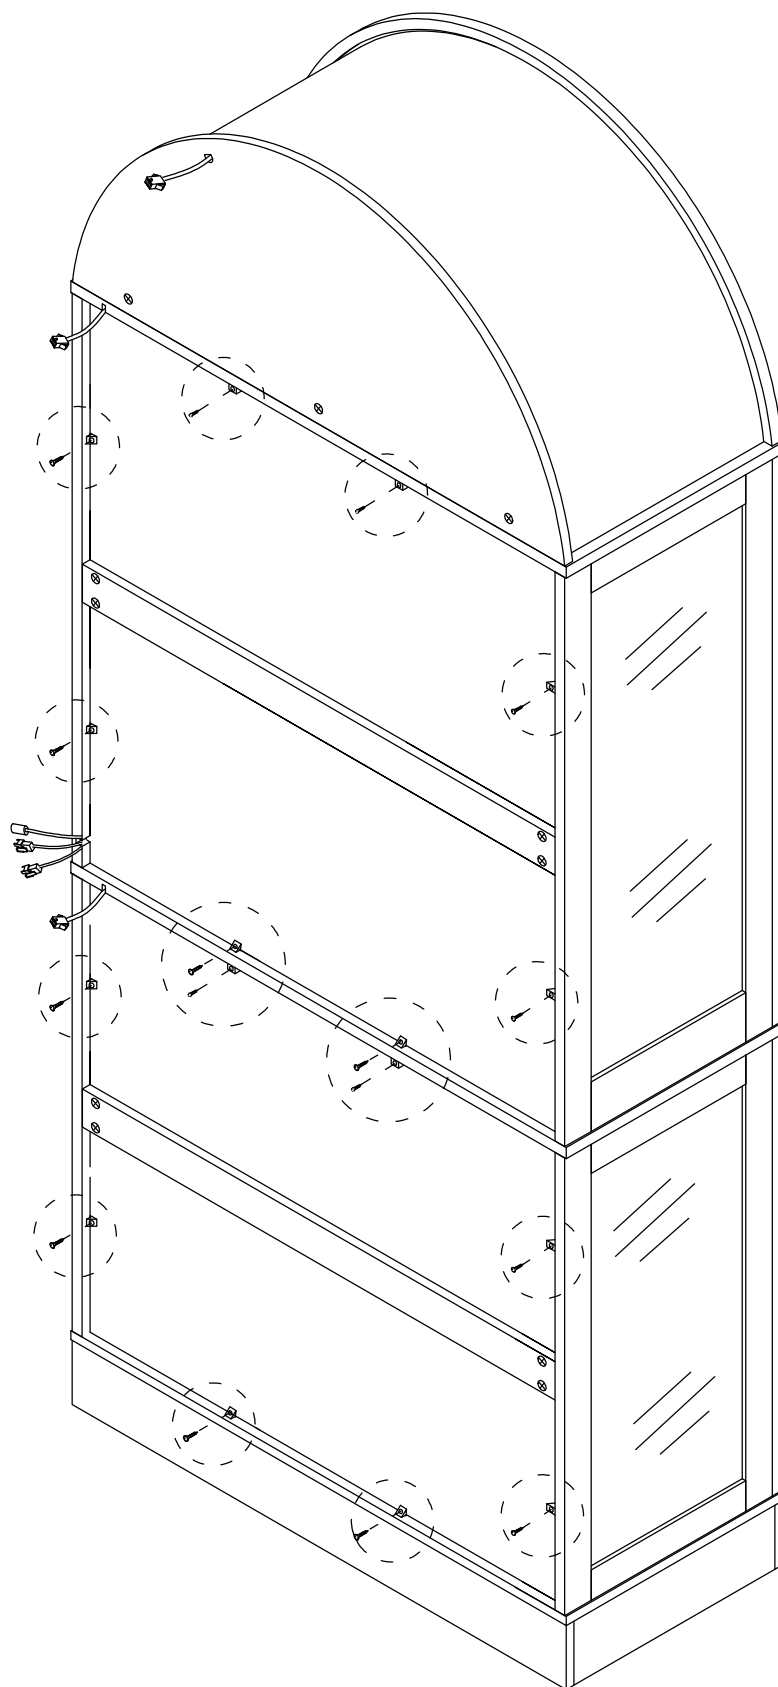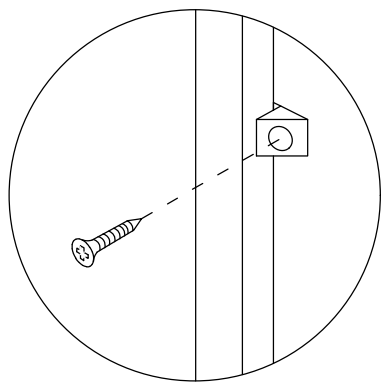


Step 49

K

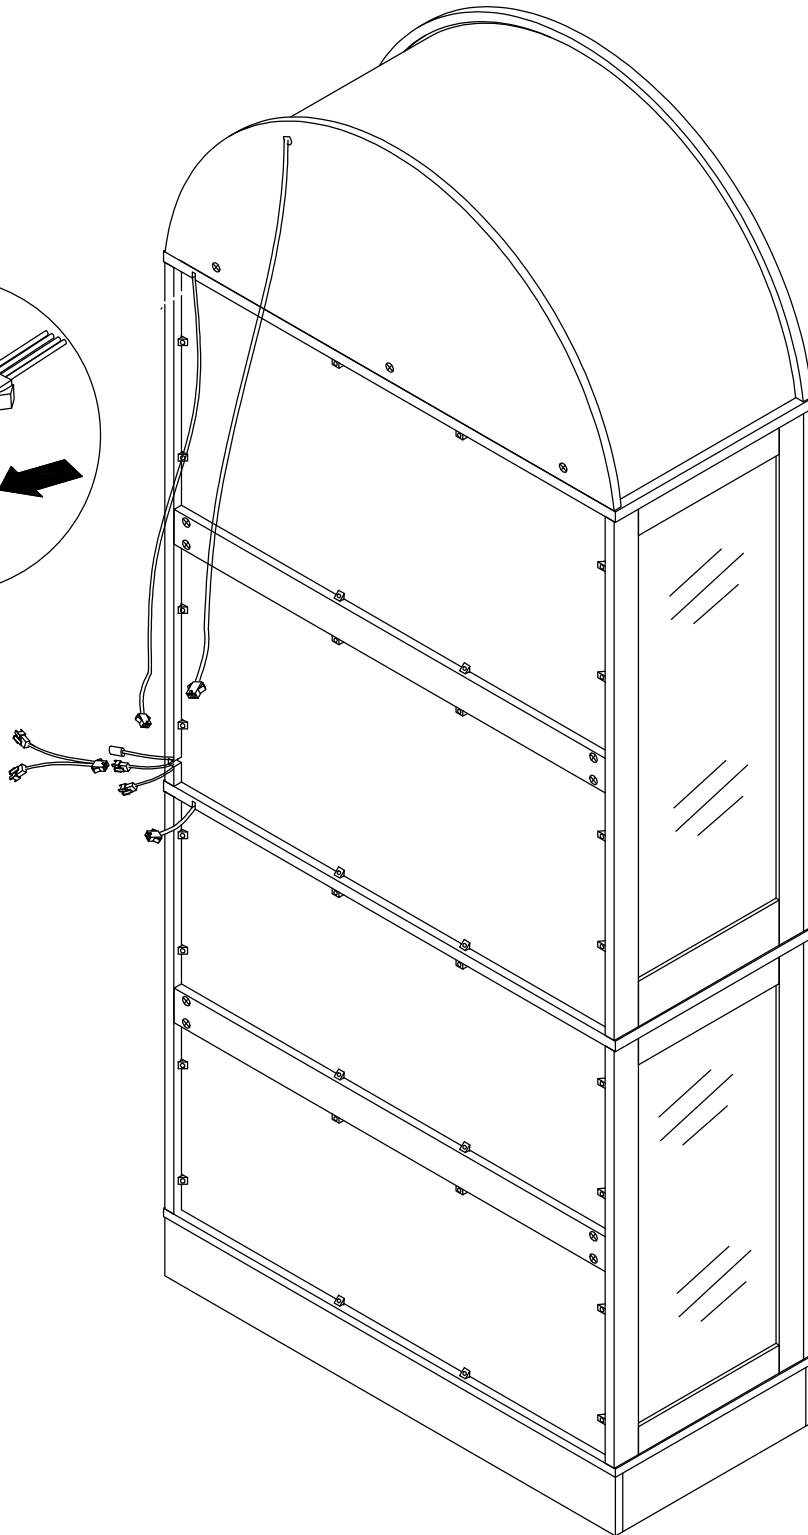


Step 50

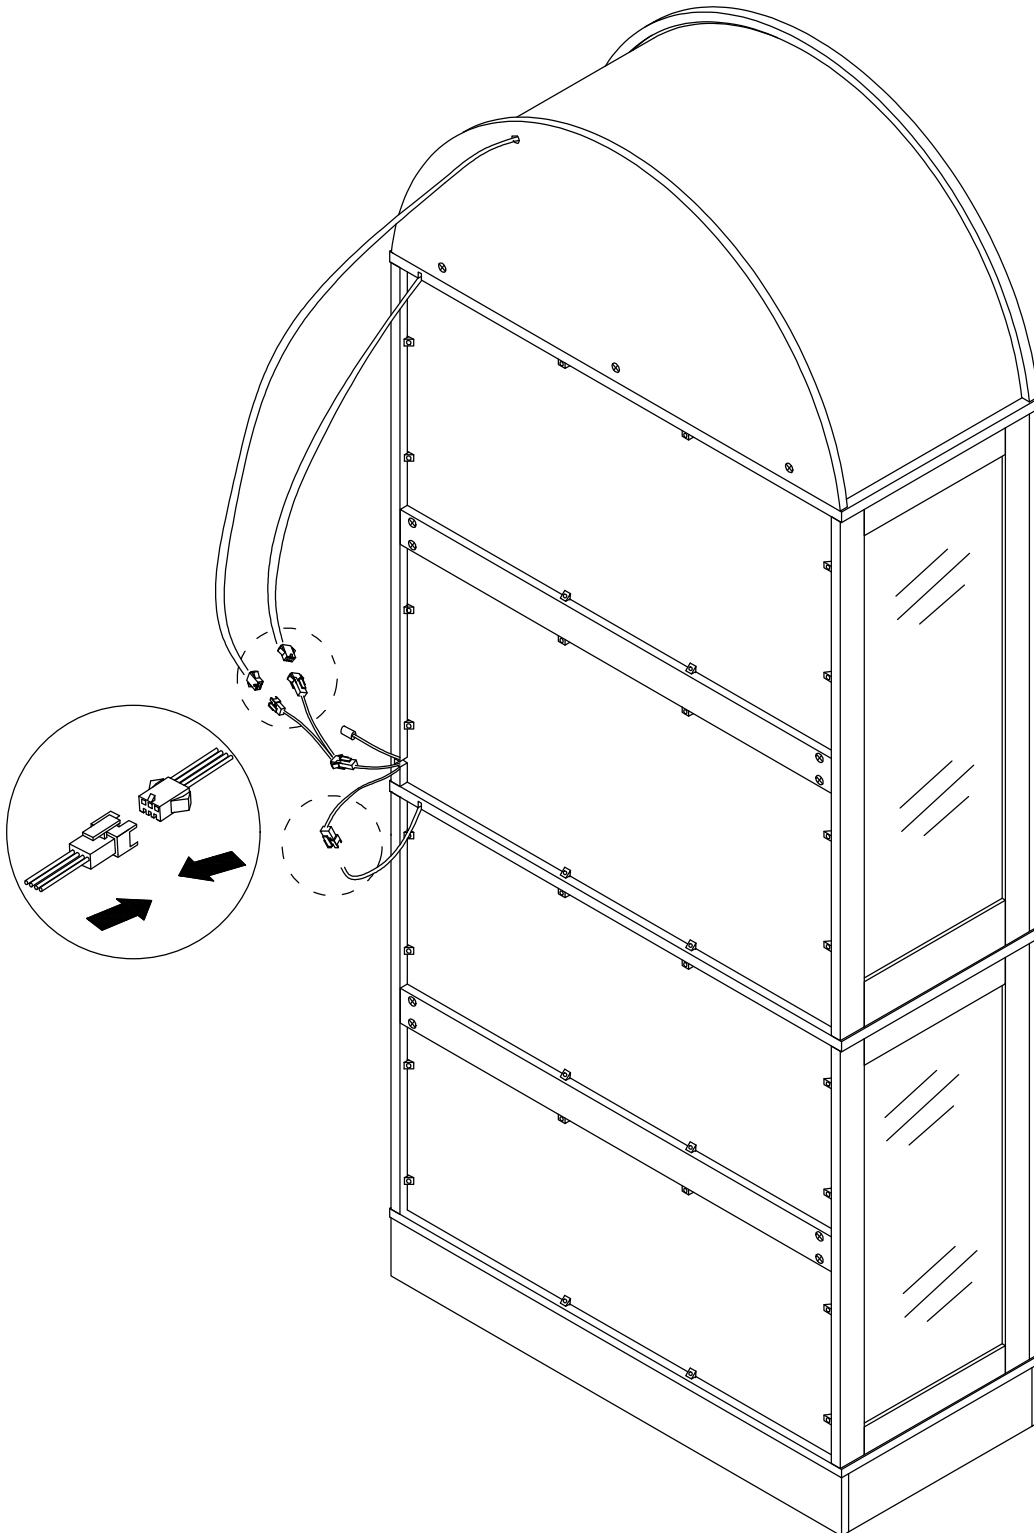


Step 51

F



x4

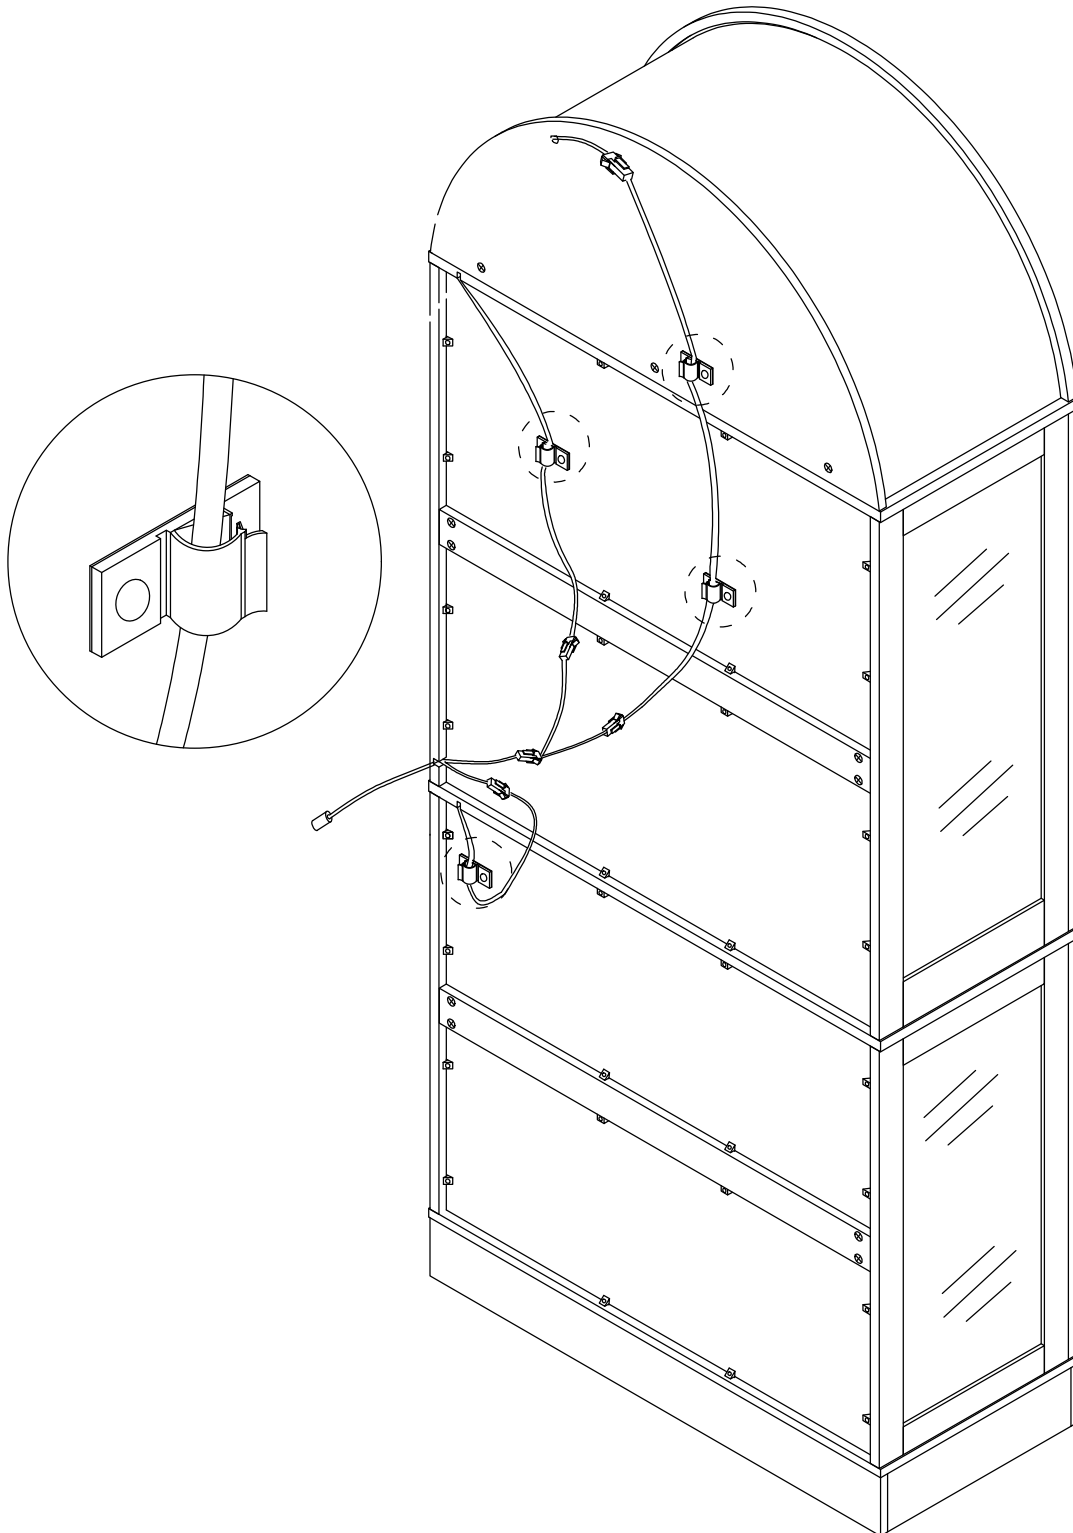

Step 52

M





1pcs



1pcs




1pcs

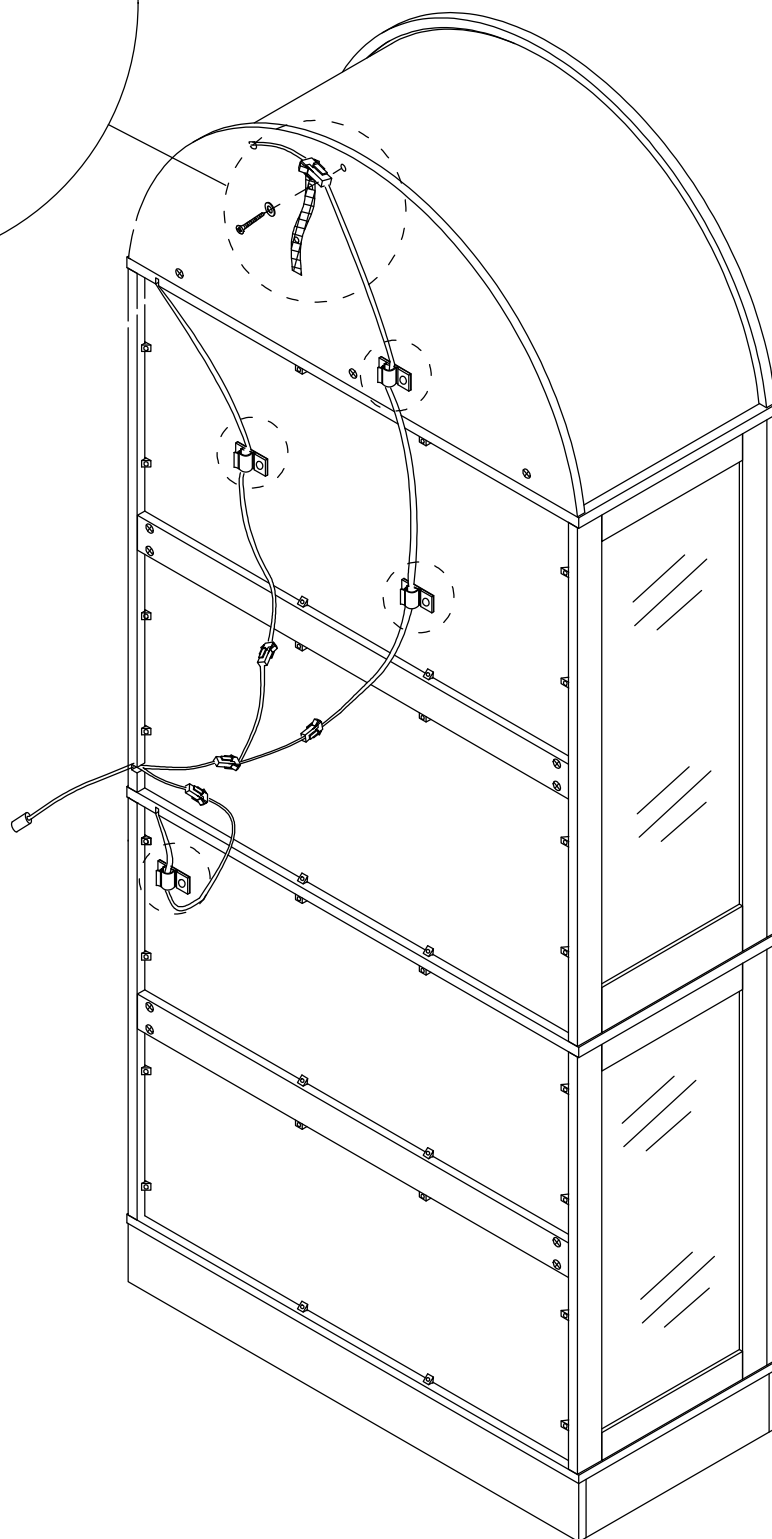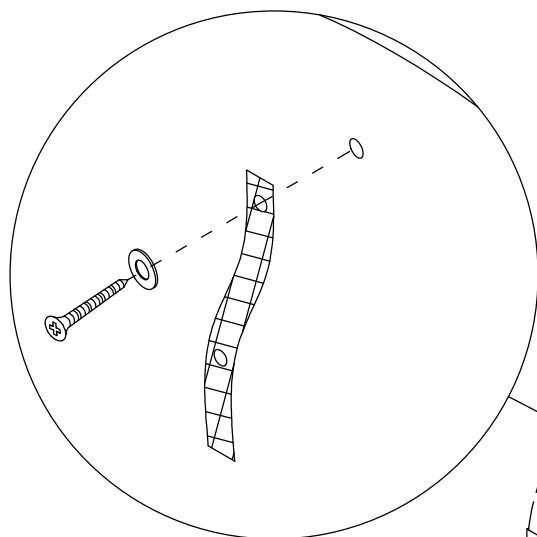


Step 53

use a ruler to measure the approximate height of the product on the wall, and then mark it with a pencil.

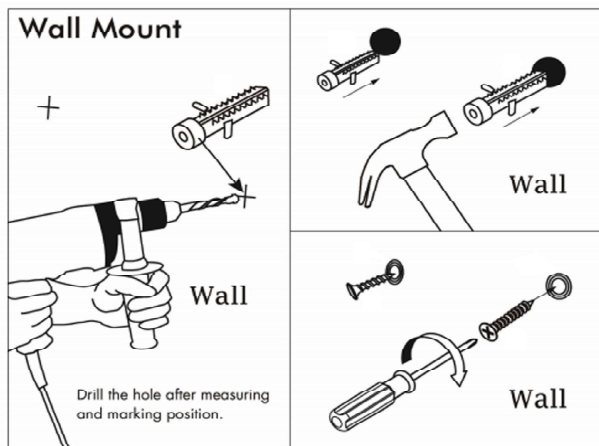


Use a tape drill to make holes in the wall that are suitable for the product screws.




Put the expansion bolt into the hole.

Pass the matching screws through the "anti-rewind" and tighten them to fix them on the wall.


wall

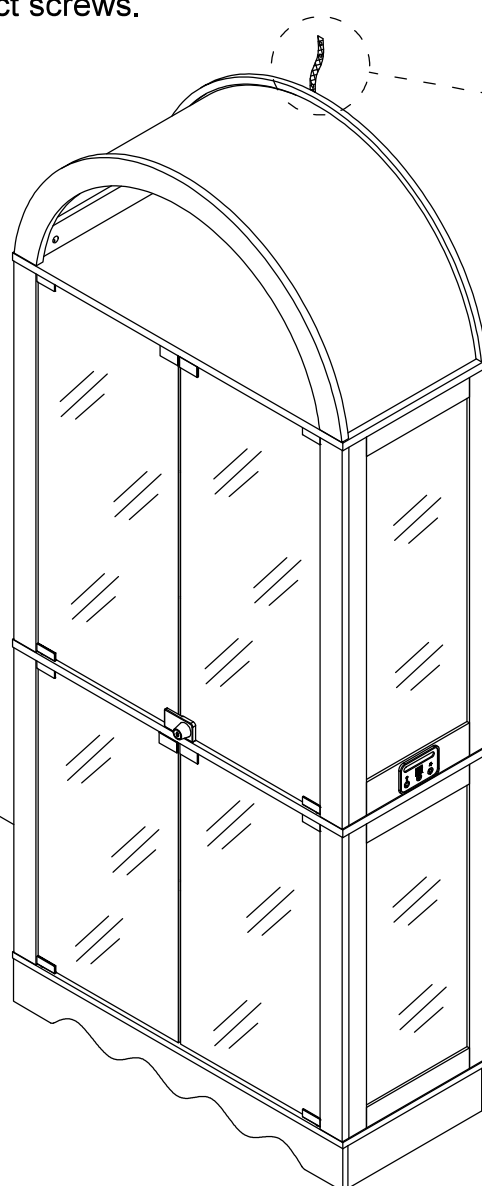



wall




Step 54



x1

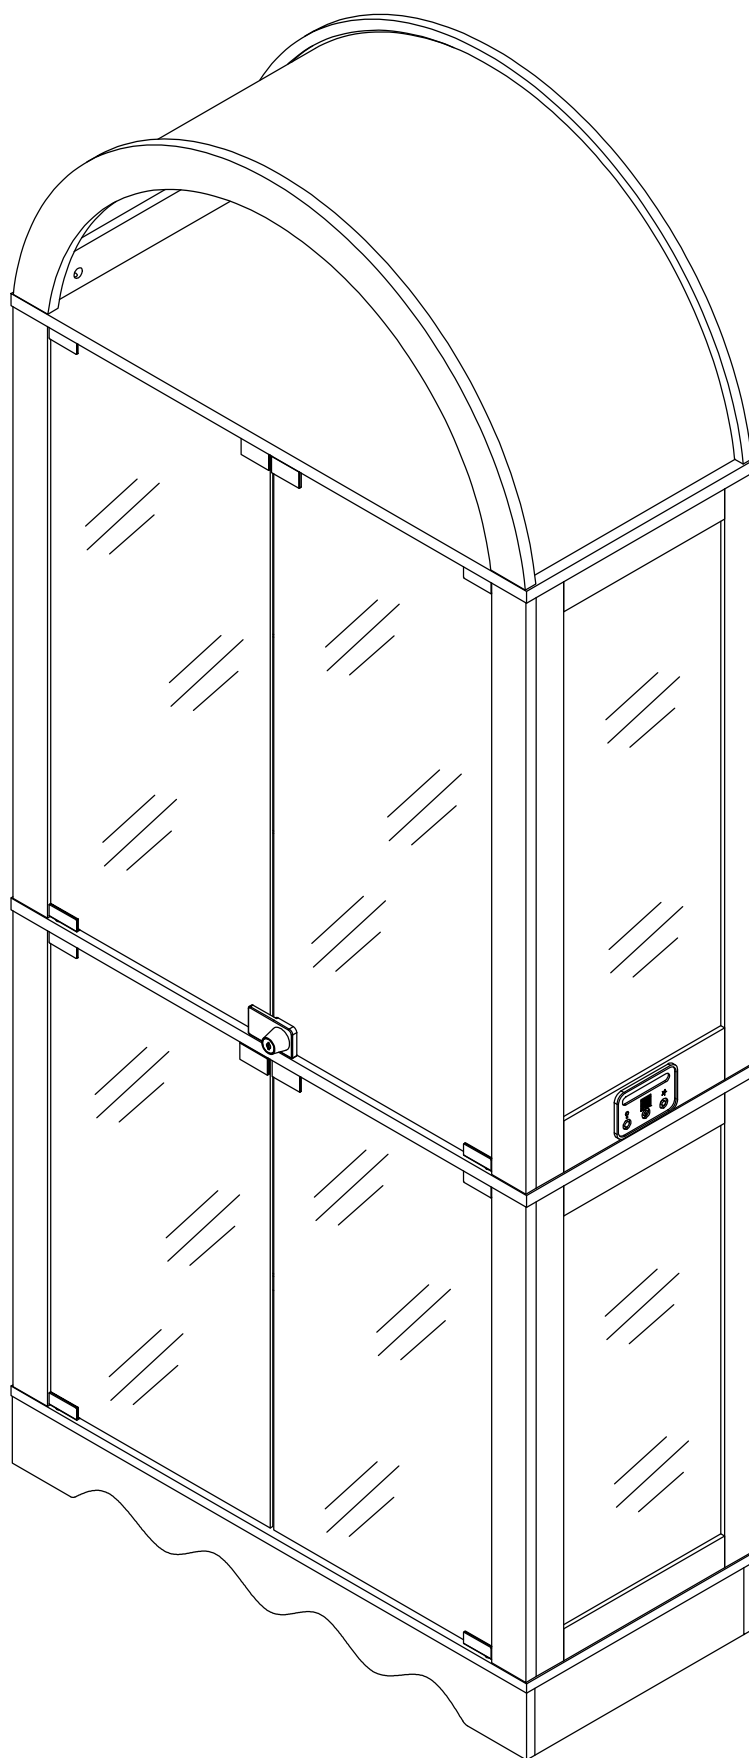


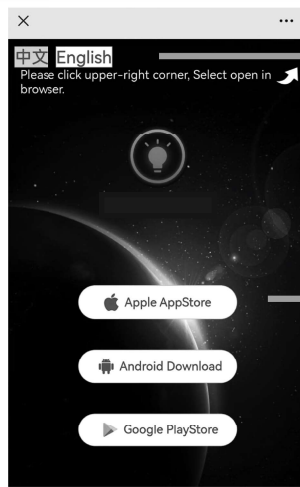


Select English Language

Select the corresponding device to download.

Note: If the download fails, please turn off the “Enhanced Protection” in the Pure Mode settings of the device.

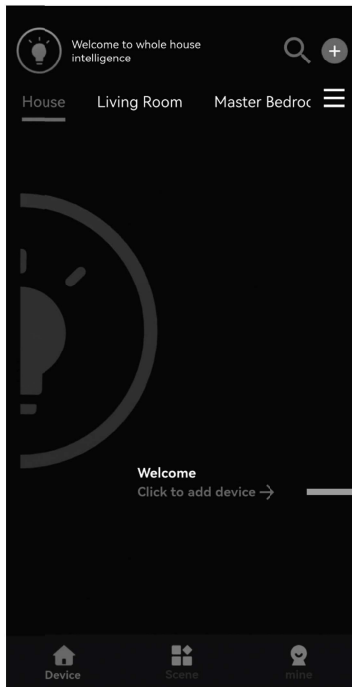


1

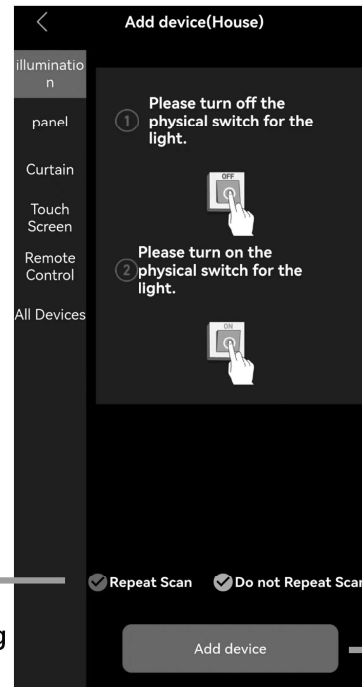

2

It turns blue after clicking


3

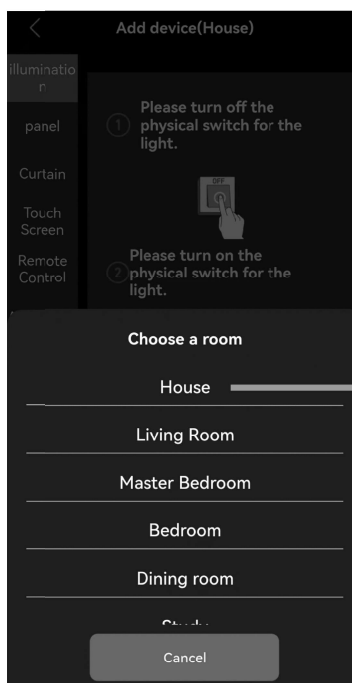

4




5 Unplug the smart box

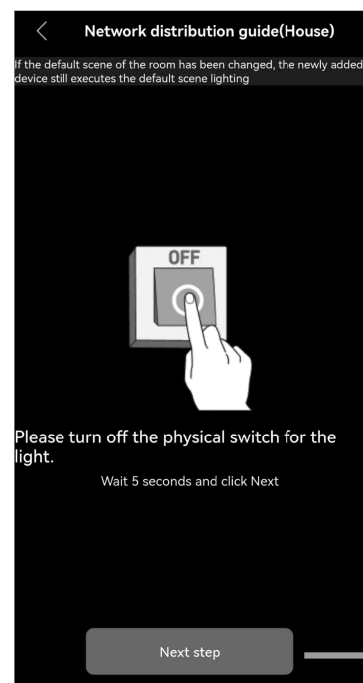


6

⑦ Plug in the smart box power plug.

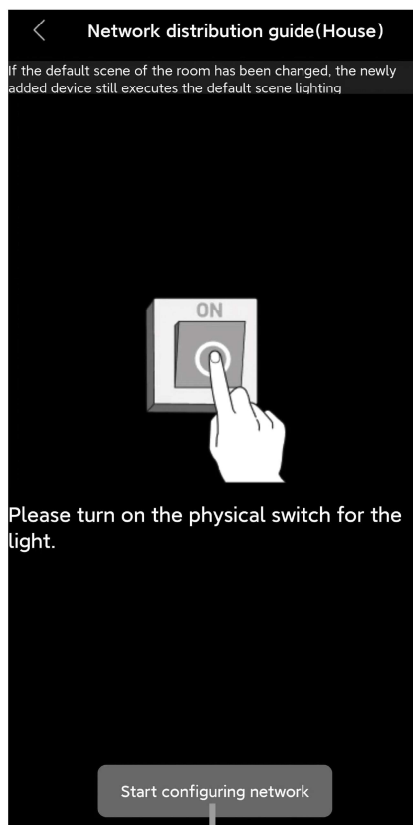


⑧


The appearance of this program icon indicates that the matching is complete

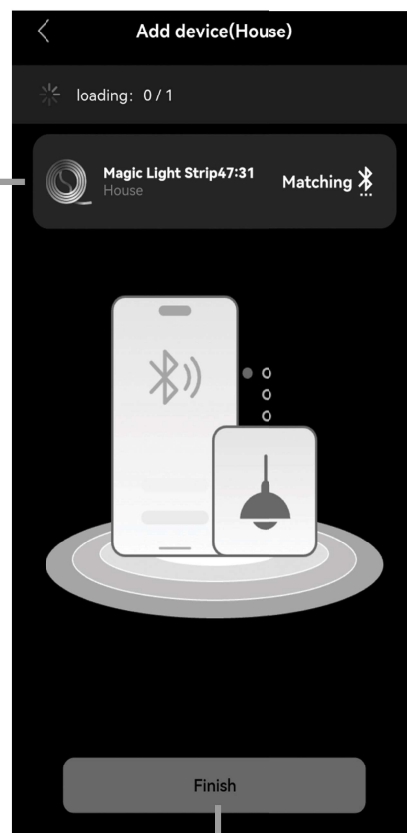


⑨

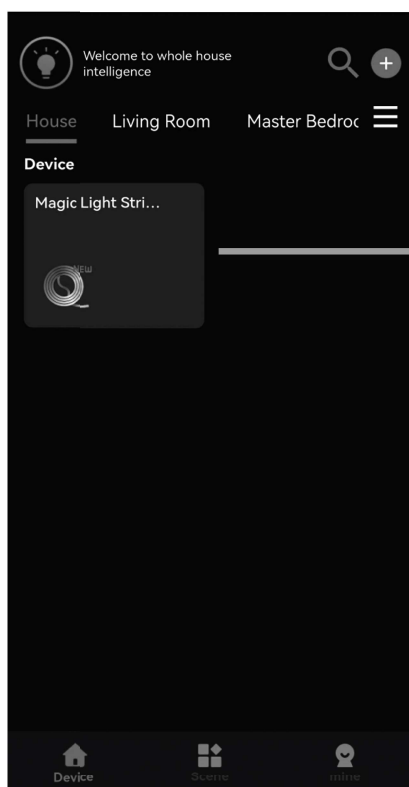

⑩

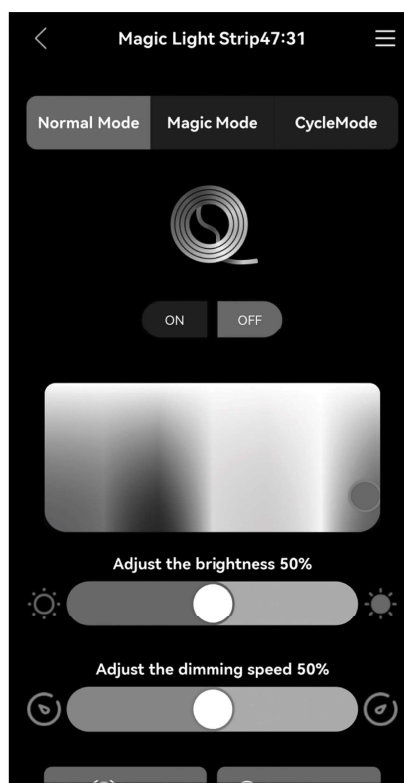

Now you can freely adjust the lighting according to your preferences

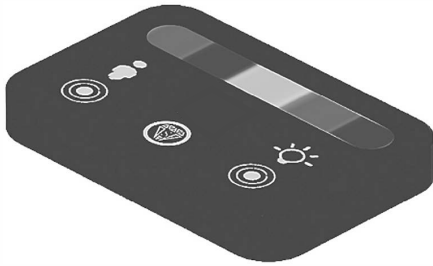

User's Guide

Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. With 4 touch buttons, it can turn ON/OFF the light and turn ON/OFF the induction function, change light colors, and adjust the light luminance.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation

This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights.



i. Single Click: Turn the light on/off.

ii. Quick Double-Click: Switch between 7 static RGB colors.

iii. Long Press (2+ seconds): Adjust the light luminance.

This touch button is used to turn on/off the induction function.



A. touch this button once to turn on the induction function (indicator light on).

After the person leaves or remains stationary for more than 30 seconds, the light strip goes out; people and objects within a range of 1 meters move will light up the light strip.

B. Long press this button for 0.5 seconds to turn off the human body induction function (the indicator light goes out).

At this point, Keep the light strip as it was before turning off and no longer be affected by human and object activities. By default, induction function is enabled when powered on.



This touch button is the Dynamic Phantom Color Mode, which includes 5 magical lighting effects.

Simply tap to cycle through the options. (Attention: This mode cannot adjust the brightness)



This area controls the color switching function.

You can tap or slide to any color bar position to change the color.

Color Palette



Induction Button

Phantom Color Mode Button

Master Switch Button



ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.
3. If you have any questions when installing, please feel free to contact us. Thank you.