

# Fairfax® Single-Function Showerhead K-45412-G

### **Features**

- Katalyst® air-induction technology maximizes the air/water mix for a powerful, even flow.
- Optimized sprayface with 48 nozzles delivers a more focused coverage of large water droplets.
- Minimizes wasteful overspray and increases cleaning and hair-rinsing performance.
- 1.75 gpm (6.6 lpm) flow rate.
- 1/2" NPT connection.
- Coordinates with Fairfax faucets and accessories.

#### Material

KOHLER finishes resist corrosion and tarnishing.

### Installation

Wall-mount.

### **Water Conservation & Rebates**

 This product can help a building earn Water Efficiency points in LEED® Green Building Rating System.

## **Recommended Products/Accessories**

K-7397 Shower Arm and Flange K-23723 Faucet cleaner





### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**


Color tiles intended for reference only.


Color	Code	Description
	СР	Polished Chrome
	BN	Vibrant® Brushed Nickel
	2BZ	Oil-Rubbed Bronze





# Fairfax® Single-Function Showerhead K-45412-G

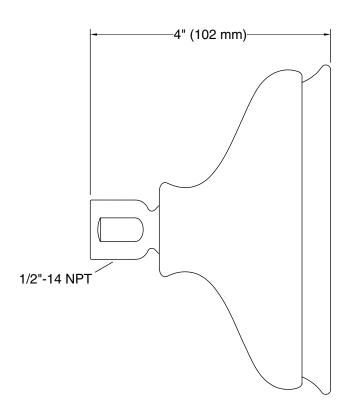

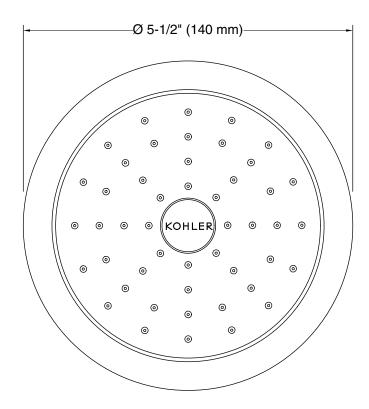

### **Technical Information**

All product dimensions are nominal.

## Showerhead/Body Spray:

Rated maximum flow: 1.75 gal/min (6.6 l/min)

Pressure: 80 psi (5.5 bar)

### **Notes**

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

Install this product according to the installation instructions.

