
roof box

Product ID. Q2NEY

Scan for Support
support@garvee.com

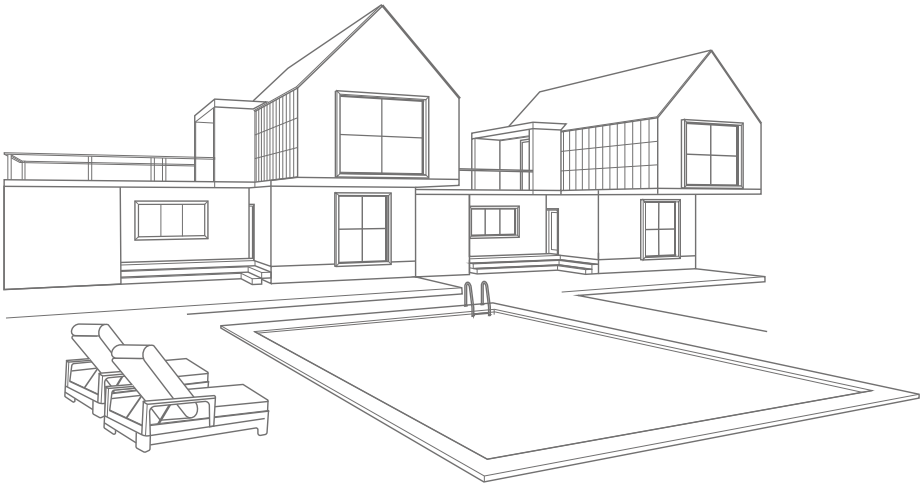

GARVEE.com


V2601236PD3

FITTING INSTRUCTIONS

Getting Started


1.Park in a safe flat spot.
2.With the assistance of another person, place the roof top box on the vehicle's roof rack.
3.Mount box as close to rear of vehicle as possible to minimize wind noise and resistance.
4.Check the rear hatch and hood for clearance

THE DISTANCE OF FRONT AND REAR CROSS BAR:




Roof Rack Specification

A width:30mm-85mm
B width:18mm-38mm

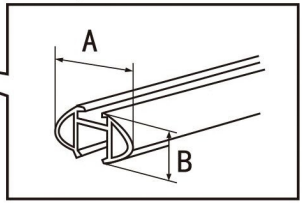

Roof box hatch door clearance

To determine which cargo boxes fit your vehicle without contacting your hatch, measure from the center of your vehicle's front rack crossbar to the point where the roof meets the hatch. Compare this number to the "Front Clearance" dimensions below. if your vehicle measures more than the number listed, that cargo box will fit your vehicle without contacting your hatch.

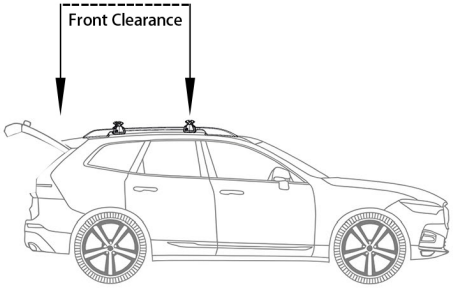


Note:


Some roof racks feature adjustable position crossbars. Moving the crossbars forward on the vehicle will increase the number of cargo boxes that fit without contacting the hatch. If you're unsure whether your vehicle's crossbars can be re-positioned, see your vehicle or roof rack manufacturer for assistance.

Box mounting dimensions				
Model#	Capacity	The distance of front and rear cross bar: (Measure the inner side of the crossbar) Minimum Spacing	Maximum Spacing	Front Clearance
9051	11.5cuft	25.5cm	46.7cm	91cm
9065s	12cuft	25.5cm	46.7cm	92cm
9071	12cuft	25.5cm	46.7cm	97cm
9036M	13.5cuft	43cm	64cm	116.5cm
9072	14cuft	45.9cm	66.5cm	116cm

Fitting Roof Box


Put the roof box in the right position on rack.(suggest two persons)

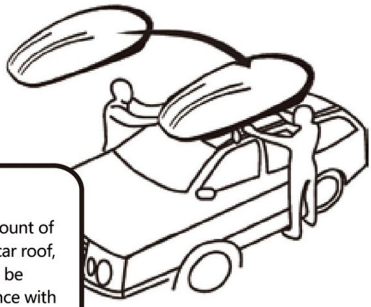

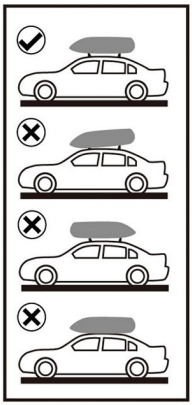

NOTICE

1.Due to a large amount of airflow around the car roof, the roof box should be kept a certain distance with car roof in order to bring lesser wind resistance, and keep the driving stability.
2.It is a normal phoenomenon that the roof box looks soft, because it is made of a high flexility material, not easy to crack, also not belong to quality issue.

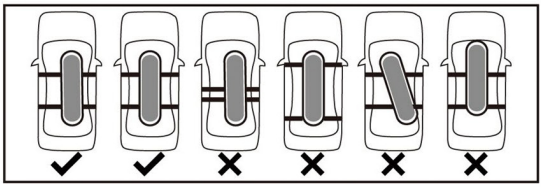


Securing Your Cargo

1.Utilize the included cargo securing straps to ensure contents do not shift during transportation.

2.The cargo securing straps should go through the included cargo strap loops to ensure secure fitment.

How to use the Straps

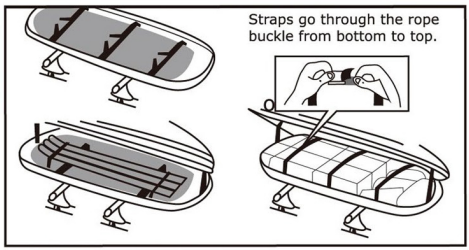

Parts List


Roof Box 1
Key.....2
Luggage Strap 2
Quick Connect Anchors.....4
Fitting Instruction 1

NOTICE

All cargo must be secured for transportation to avoid damage and unintended weight shifts

NOTICE

1. Please ensure that the roof top box and all contents are properly secured before driving.
2. The total weight of roof box and luggage should be less than the bearing limit of roof rack.
3. Ensure that you have a complete roof rack system installed on your vehicle. Failure to do so may result in damage to the roof top box, your vehicle and/or contents of the roof top box.

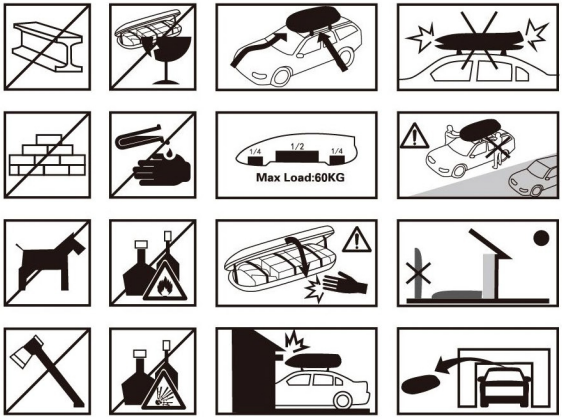

WARNING:

1.The lock button on the anchor cap is for anti-shock use only.
It will avoid unlocking when driving. Do not over tighten.
2. When opening one side of the box, please make sure the other side is locked.