



Installation Instructions


Napa

BA-250-XX

Two Handle Widespread Bathroom Faucet

Thank you for selecting Lulani.









To ensure that your installation proceeds smoothly, please read these instructions carefully before you begin.

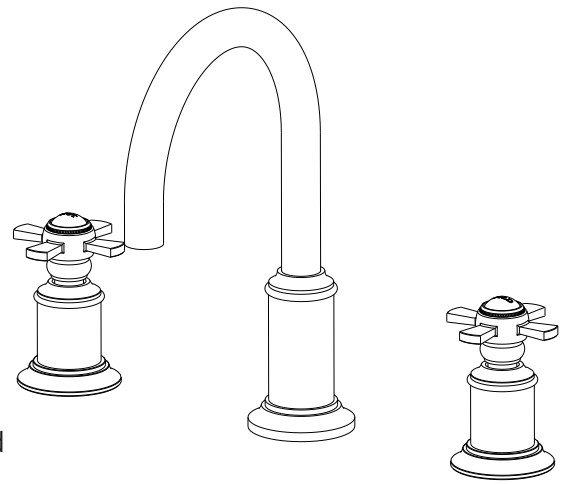

Parts Included

1. Spout (x1)
2. Handles* (x2)
3. Above sink hardware: rubber o-rings (x2)
4. Below sink hardware: metal washer (x1), plastic washers (x2), mounting nut (x2)
5. Quick Connector (x1)
6. Aerator key (x1)
7. Cartridge assemblies (x2)
8. Water supply lines (x2)
9. Quick connect hose (x2)
10. Over-flow pop-up drain (x1)

*NOTE: You faucet will arrive with ONE set of handles.

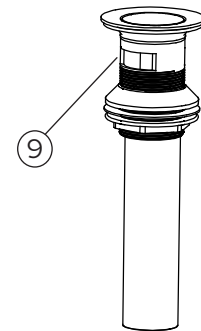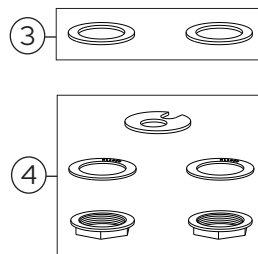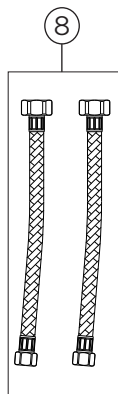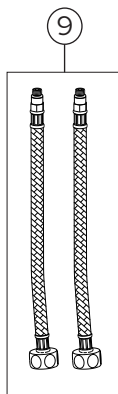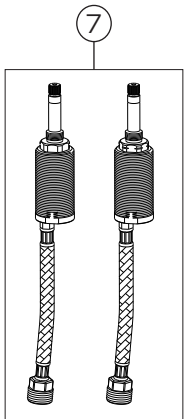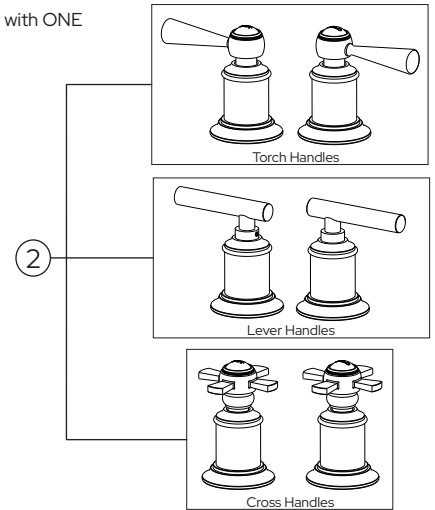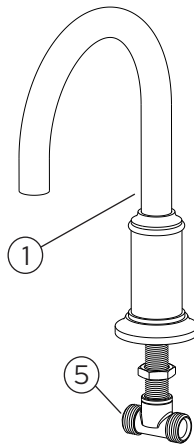

Note: This faucet has been packaged with an over-flow pop-up drain. DO NOT use with a non-over-flow sink.

Recommended Tools (not included)

1. Adjustable Wrench
2. Phillips Screwdriver
3. Safety Goggles
4. Flashlight
5. Bucket
6. Measuring Tape
7. Plumber's Putty
8. Channel Locks
9. Allen Key



Caution: Tips for removal of old faucet

Always turn off the water supply before removing the existing faucet or replacing any part of the faucet. Open the faucet handle to relieve water pressure and ensure that water is completely shut off.


Maintenance

Your new faucet is designed for years of trouble-free performance. Keep it looking new by cleaning it periodically with a soft cloth. Avoid abrasive cleaners, steel wool, and harsh chemicals as these will dull the finish and void your warranty.

Step 1


Place the faucet body (1) through the middle sink hole. From underneath the sink, secure the spout with the metal clip (2) and bolt (3).

Then, screw on the quick connector (4) to the end of the threads.

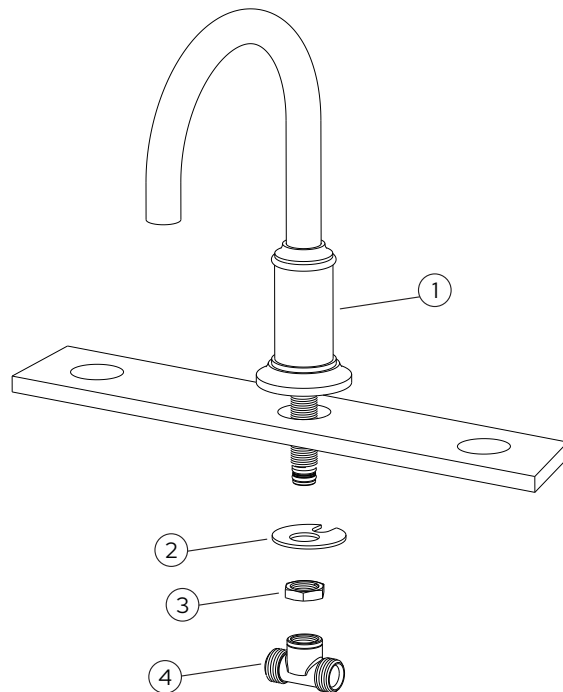


Step 2

Assemble the cartridge assembly (1) with the quick connect hose (2).

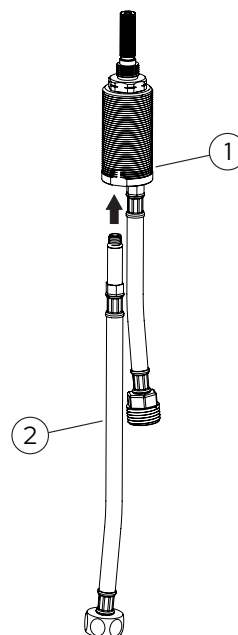

Step 3


Place the plastic washer (1) and lock nut (2) over the valve body of the cartridge assembly (3). Insert the assembly through the sink hole from under the sink. Place the rubber washer (4) and handle cover (5) over the valve spindle (6) of the assembly. Adjust the position of the assembly and secure it with the lock nut (2) and handle cover (5).

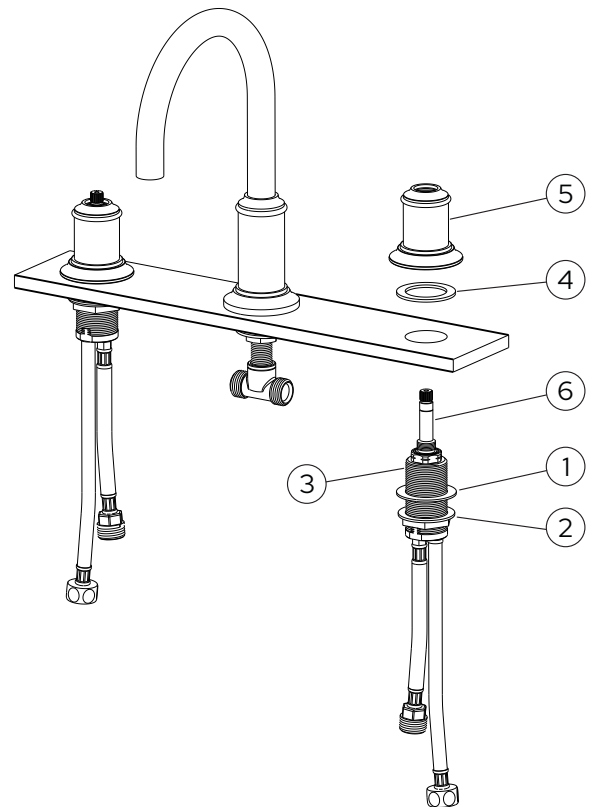

Step 4


TORCH HANDLES

Place the handle top (1) onto the spindle (2) and tighten with the provided screw (3). Then, cover the screw with the hold/cold water indicator (4).

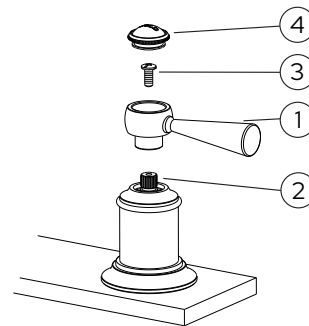


CROSS HANDLES

Place the handle top (1) onto the spindle (2) and tighten with the provided screw (3). Then, cover the screw with the hold/cold water indicator (4).

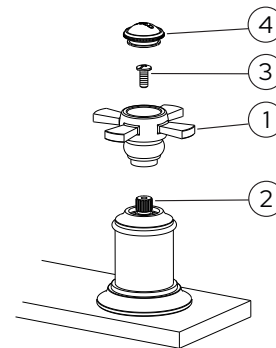


LEVER HANDLES

Place the handle top (1) onto the spindle (2) and tighten the screw (3) with the provided allen wrench (4).

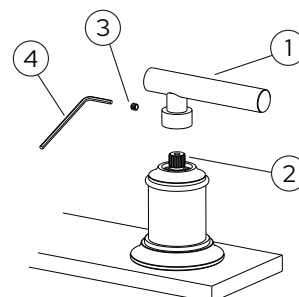


Step 5

Connect the “quick connect” hose (1) to the quick connector (2) by twisting the ends of the hose to the ends of the connector.

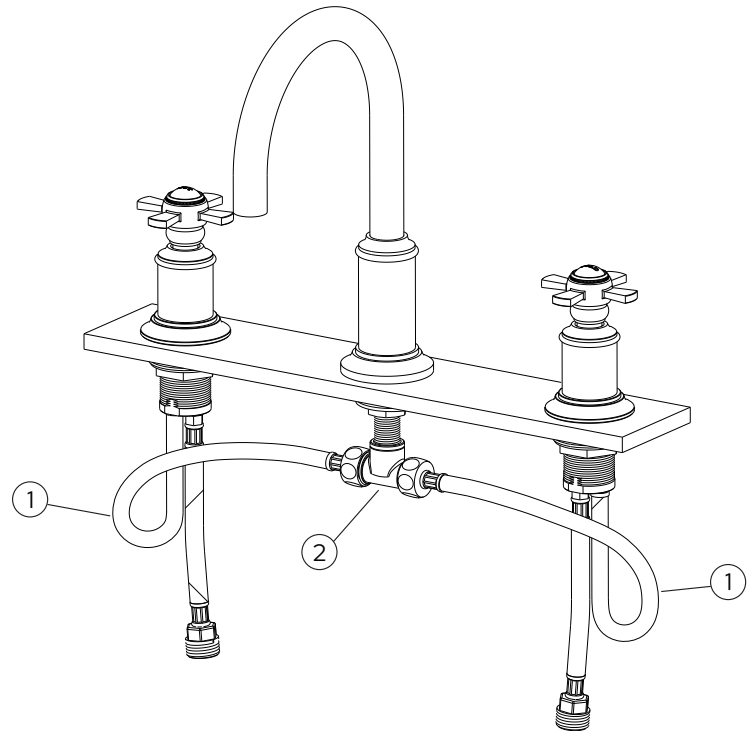

Step 6

Connect the hose (1) from the cartridge assembly to the water supply lines (2). Then, connect the water supply lines (2) to the hot and cold water supply valves (3). Caution: Be careful not to mix up the hot and cold supply lines. Check all connections (shown with arrows in the image) for leaks. Re-tighten if necessary. Do not over tighten!

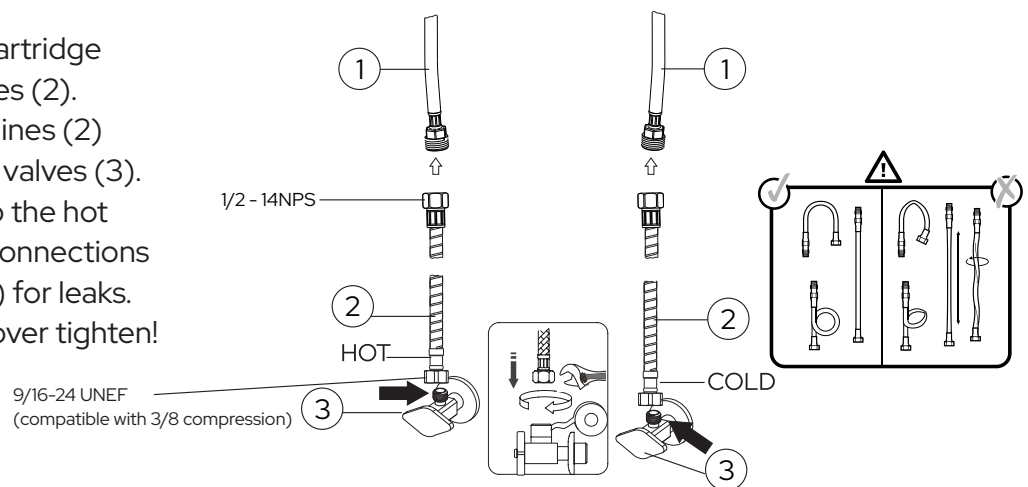

Step 7


From the top of the drain hole, place the drain (1) through the installation hole. Make sure that the rubber o-ring (2) is on the top side of the sink. From under the drain hole, install the rubber gasket (3) and metal nut (4) by hand twisting on to the tail pipe of the drain. Then, install the tail pipe to the wall plumbing.

*Note: Lulani faucets are packaged with over-flow drains by default. If you have a specialty sink and need a NON-over-flow drain, use the QR code below to view our alternative drain options. Use code **[FREEDRAIN]** at checkout to receive a free drain, just pay for shipping.




*Limit of 1-time use per customer

*Limited to the number of faucets purchased

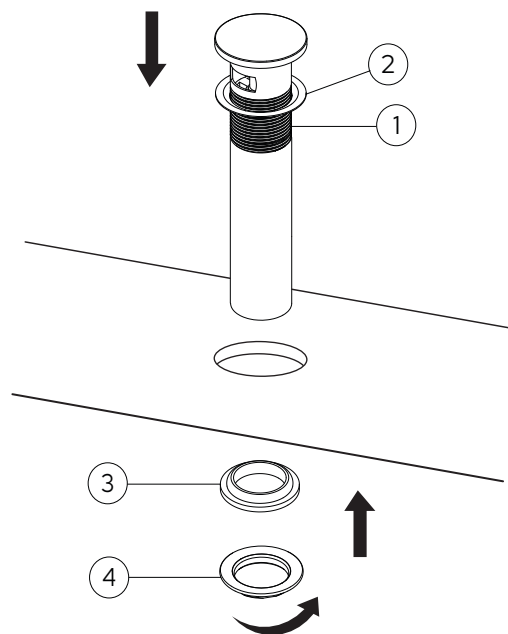


What's an over-flow pop-up drain?

The primary purpose of the over-flow drain is to help your sink drain faster. The over-flow on the drain works in coordination with the primary drain to prevent flooding.

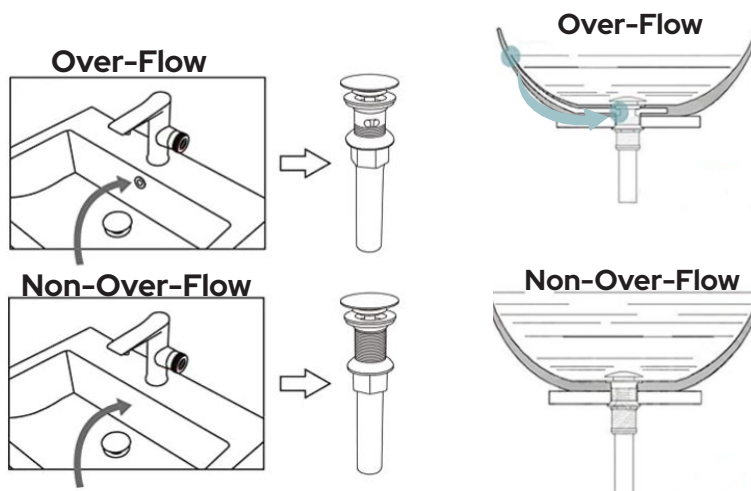


Step 8

After installation is complete, remove the aerator (1) with the aerator key (2) to flush for any possible debris.

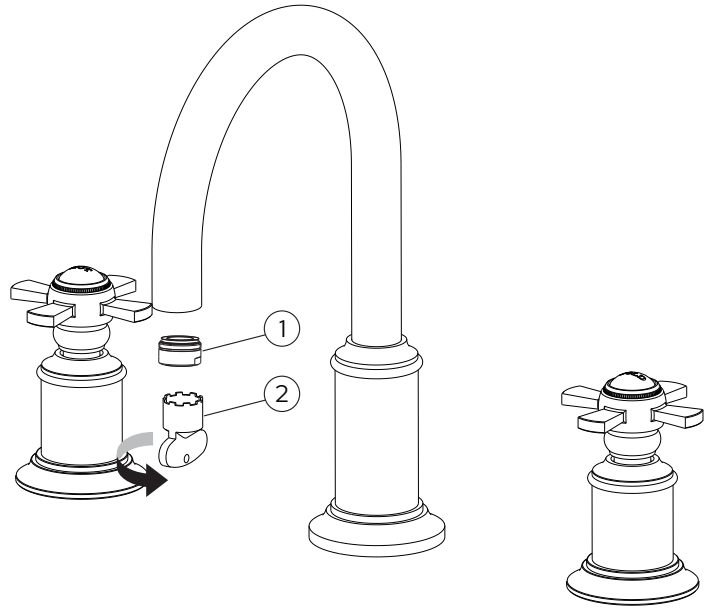

Step 9

Turn the faucet handle all the way on, turn on the hot and cold water supply and flush water lines for one minute. Re-install the aerator once complete.

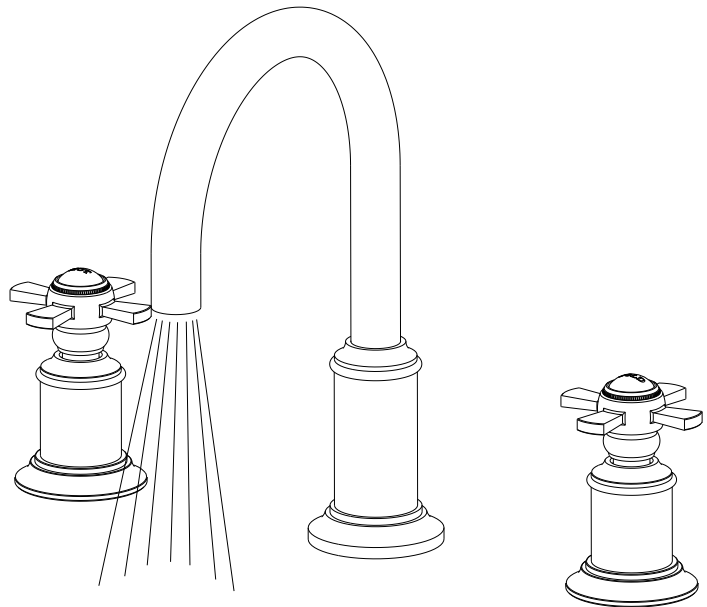

Congratulations! You've successfully finished installing your new faucet. For troubleshooting questions or concerns, please reference the Owner's Manual or visit our website at www.lulani.com.

We value your opinion! Don't forget to leave us a review.