





PARTS & ASSEMBLY SHEET

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
to be filled out by retailer


Canopy 1ea $\Phi 360 \times 32H \times 0.8t$	Hex nut 2ea $\Phi 19 \times 5mm$ 	Cap 1ea $\Phi 23 \times 6H \times 0.6t$
Chain 2ea 10ft 	Nipple or Threaded rod 1ea 4'18T*50L 	Wire connectors 3ea Orange 
Chain connector 2ea 23.8*59mm 	Mounting strap 1ea 100mm*20mm 	Green screws 1ea $\Phi 9 \times 10mm$
Deco Nut 1ea $\Phi 22 \times 18H$ 	Mounting screws 2ea 8/32T*1-1/4"L 	
Part Needed _____ Part Needed _____ Reason why (missing, scratched, broken glass, bent, bad finish) Comments _____		Quantity _____ Quantity _____

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

1. By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain (J) then remove the excess chain (J) and discard it.
2. Use Chain connector (R) to attach the Top loop (K) to one end of chain (J) and close the connector as shown. (disregard if the Top loop is already attached to one end of chain)
3. Attach a Chain connector (R) to the top end of the Chain (J). Repeat steps 1 thru 3 for the second chain.


NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

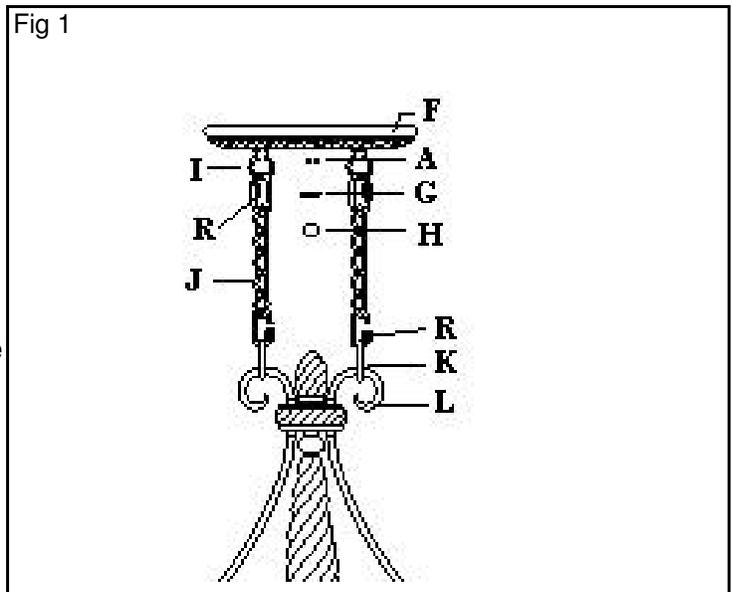


For Customer Service, contact the place of purchase to arrange for replacement parts.

PARTS & ASSEMBLY SHEET

- Slip the Top Loop (K) over top curve of the fixture Frame (L). Lace the fixture's wire through the Top loop (K) and the chain links (J) (every three links) and pull until taut.
 - Use Chain connector (R) to attach the top of Chain (J) to the Canopy loop (I) and close the chain connector as shown.
 - Make sure the weight of the chandelier is supported by the chain-not the electrical wire.
- * You may now install the fixture.

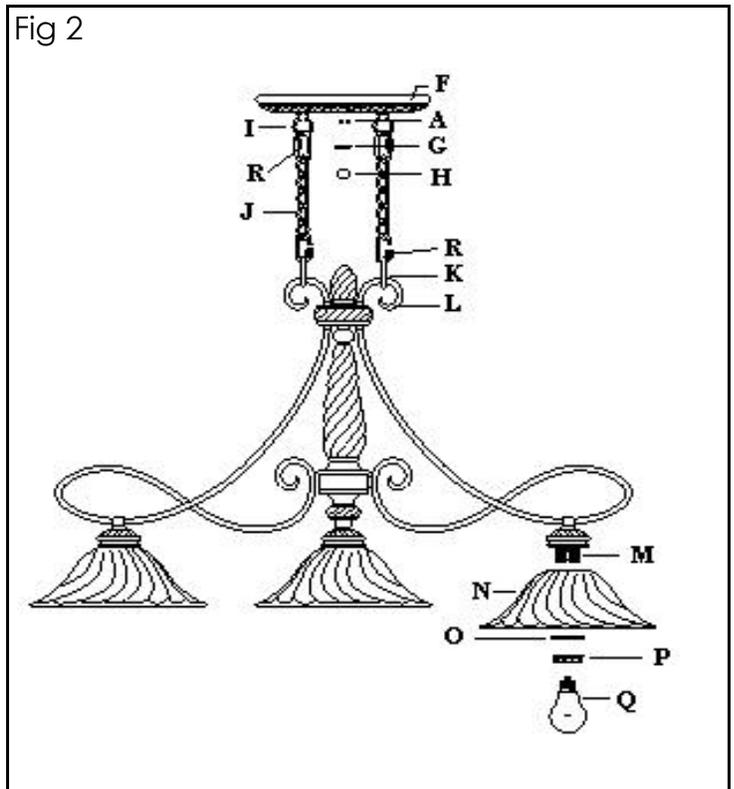

- Note: Complete these remaining steps after the fixture is hung.
- Place the Glass Shade (N) over the Threaded Socket (M), place the Socket washer (O) over the threaded socket (M) then secure the Glass Shade (N) by threading by the Socket Ring (P) until tight.
 - Install the light bulbs in accordance with the fixture's specifications.
- (DO NOT EXCEED THE MAXIMUM WATTAGE RATING)

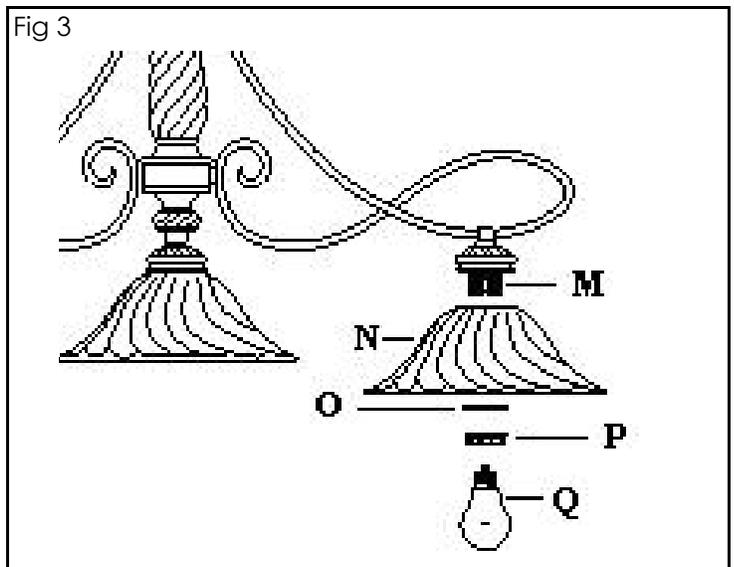

For Customer Service, contact the place of purchase to arrange for replacement parts.

