
ERIDANUS®
Kitchen & Bath Connoisseur

Installation Guide

SMART BIDET TOILET

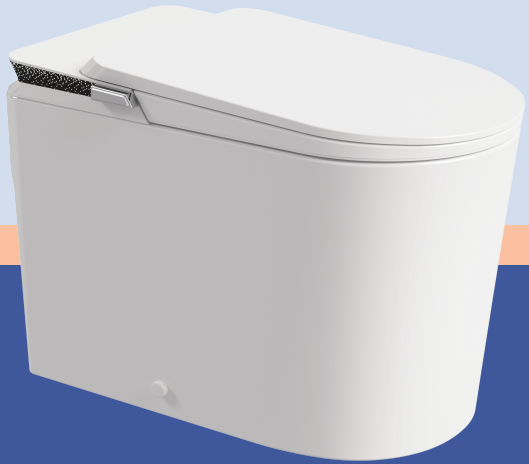

Prior to Unpacking

- Overall package weighs about 100 pounds! Two people are required to carefully unpack the product to avoid personal injuries or accidental damage to the item.
- Each item is carefully packed in customized foam. However, violent handling and shipping might crack the item. Observe potential damage while unpacking.
- The seat cover might not be hinged firmly with the toilet base. DO NOT lift the toilet by grabbing the separate seat.



TEAM LIFT


FRAGILE

Prior to Installation

- Inspect the toilet to ensure no damages during transit.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- All dimensions are nominal. Actual size of item received might vary by up to 1/8 inch. Make sure to measure your toilet before installation.
- The step-by-step guide in the installation instructions is for general reference only. Should there be any discrepancies, Eridanus cannot be held liable. It is recommended that all Eridanus products be installed by a licensed professional.
- Read installation and maintenance instructions and user manual thoroughly before installing. Be sure to use proper tools and always wear proper personal safety equipment.
- Two people are required to handle and install the toilet to avoid personal injuries or accidental damage to the item.
- Diagrams are for general display and do not represent a specific model.
- Make sure water pressure meets the minimum requirement for your model.
- This appliance must be grounded. Connect only to a circuit protected by a Ground-Fault Circuit-Interrupter(GFCI) or Residual Current Device(RCD).


- Confirm that the item received will fit in the intended location and that plumbing fixtures are located where legally required before installation begins.

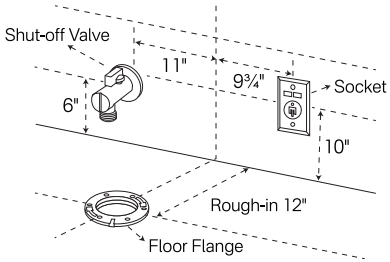

Checklist


• What's in the box

- ☐ a. Smart Toilet
- ☐ b. Shut-off Valve **1/2" NPT x G 1/2" x G 1/2"**
- ☐ c. 1/2" NPT x 3/8" Adapter
- ☐ d. Wax Ring Gasket
- ☐ e. L-Brackets & Mounting Bolts
- ☐ f. Braided Supply Hose **G 1/2" x G 1/2"**
- ☐ g. Battery Box
- ☐ h. User Manual
- ☐ i. Installation Guide
- ☐ j. PVC Bidet Supply Tube
- ☐ k. Foam Tablets (4 pcs)
- ☐ l. Foam Bottle
- ☐ m. Water Filter (Pre-Installed)
- ☐ n. Fragrance Stick
- ☐ o. Bidet Supply Connector

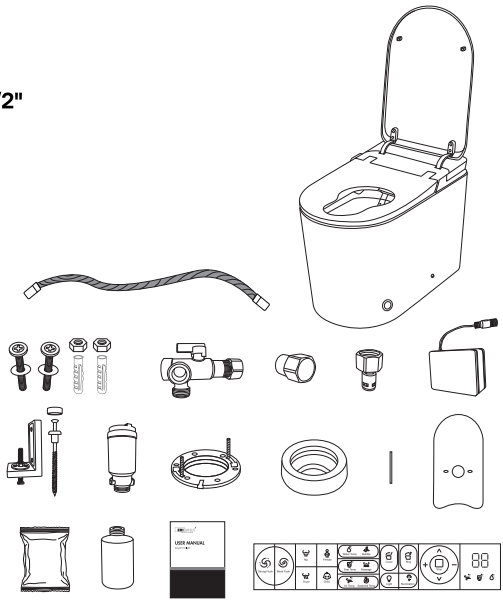


• Extra Parts/Tools Required

- ☐ i. Safety Glass
- ☐ ii. Tape Measure
- ☐ iii. Screwdriver
- ☐ iv. Adjustable Wrench
- ☐ v. Putty Scraper
- ☐ vi. Pencil/Marker

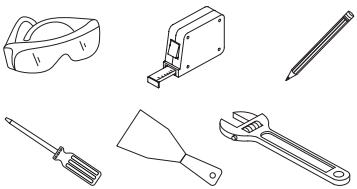


- ☐ vii. Caulk
- ☐ viii. AAA Battery x2
- ☐ ix. AA Battery x10
- ☐ x. Paper Towels
- ☐ xi. Disposable Gloves
- ☐ xii. Bucket
- ☐ xiii. Level
- ☐ xiv. Drill
- ☐ xv. Soft Cloth/Tarp

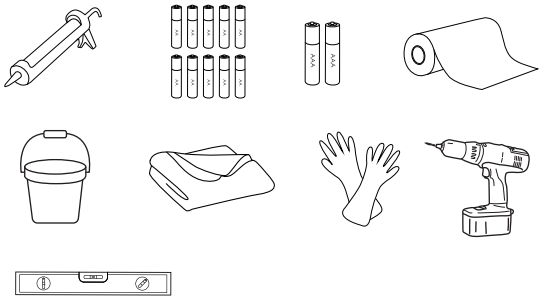

NOTE Other tools might be required during installation.


Installation

ATTENTION Before you start, check that your water supply connection works with this toilet. See page 5 for details.




Install Flange & L-Bracket

- Use the included Footprint Template to mark the flange holes and toilet position on the floor.
- Drill mounting holes and secure the closet flange using expansion anchors and screws.
- Insert two long bolts into flange slots. Slide L-brackets onto bolts, then secure with washers and nuts.



REMINDER When replacing the flange, always remember to lock the nuts into position to prevent the toilet from shifting over time and damaging the wax seal.

Apply Wax Gasket and Sealant



- With assistance, carefully turn the toilet on its side.
- Attach the wax ring gasket evenly around the rear of the trapway.


REMINDER Consider placing a tarp over the floor for surface protection.


Install Toilet Bowl

- Lift and lower the toilet over the flange and L-brackets. Align the toilet squarely with the wall, ensuring base side holes line up with the L-brackets.
- Insert white threaded sleeves into the base side holes. Tighten the screws into the brackets to lock the toilet body. Snap white decorative caps over the holes.

REMINDER Avoid over-tightening as it could potentially cause the ceramics to crack.


- Apply a smooth layer of sealant around the base. Remove any excess sealant.



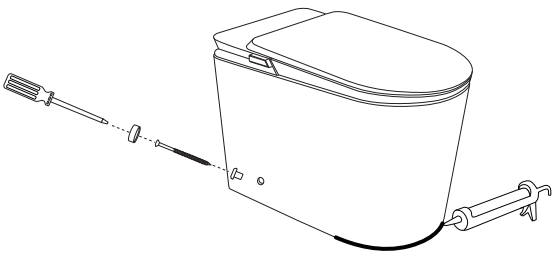

Install Shut-off Valve and Supply Lines

Overview:
To accommodate different residential plumbing systems, we provide two options for connecting the water supply to the smart toilet. Follow the instructions below to ensure a secure and reliable installation.

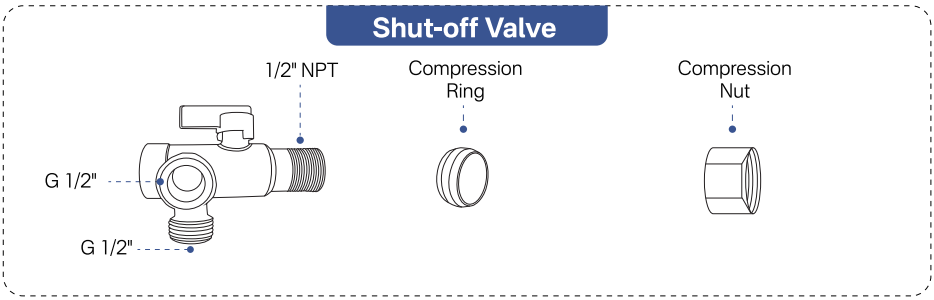


NOTE This valve uses 1/2" NPT (inlet) and G 1/2" (outlet) threads, which are NOT standard North American NPT threads. Please use the supply hoses included in this package. Do not attempt to connect standard NPT fittings directly without an adapter.

Option 1: Using the Provided Shut-off Valve and Supply Lines (Recommended)

NOTE This installation method is commonly used with wall water supply pipes made of copper.

- Remove the existing shut-off valve from the wall.
- Install the provided valve onto the water supply pipe. Turn the handle to checkwater flow (the first turn may require extraforce).
- Install the provided Bidet Supply Connector onto the shut-off valve, connect the white PVC tube (bidet supply line), then connect the Braided Hose to the shut-off valve.

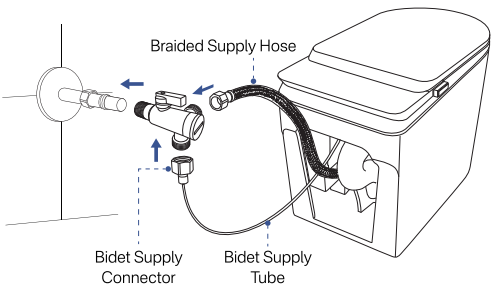


- Test water pressure and adjust the valve as needed to ensure proper flushing.

Please ensure all connections are properly sealed during installation, and check carefully for any leaks after installation.

Option 2: Using Your Existing Shut-off Valve and the Provided Supply Line, Reducing Coupling (Alternative)

NOTE Please ensure your existing shut-off valve has a 3/8" outlet before proceeding with this installation option.

- Keep the existing shut-off valve on the wall.
- Attach the provided reducing coupling 3/8" x 1/2" NPT onto the outlet of the existing shut-off valve.
- Then connect the provided shut-off valve onto the reducing coupling.
- Install the provided Bidet Supply Connector onto the shut-off valve, connect the PVC Tube to the connector, then connect the Braided Hose to the shut-off valve.

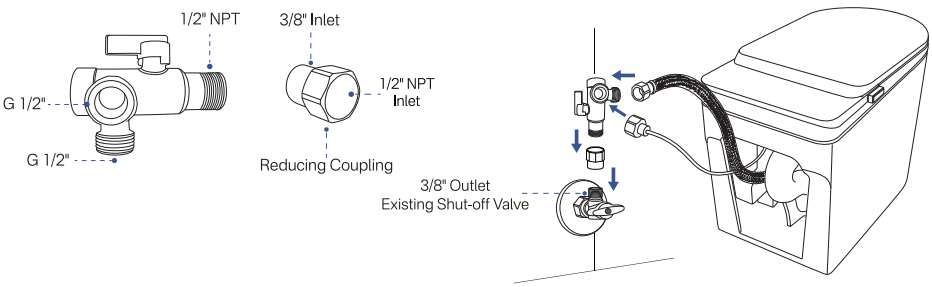

Contact Information

Email	support@eridanus.net

For any product-related questions or concerns, feel free to reach out to us via the email above. Our support team will respond within 24 business hours.

Installation Guide

© COPYRIGHT 2026 ERIDANUS