







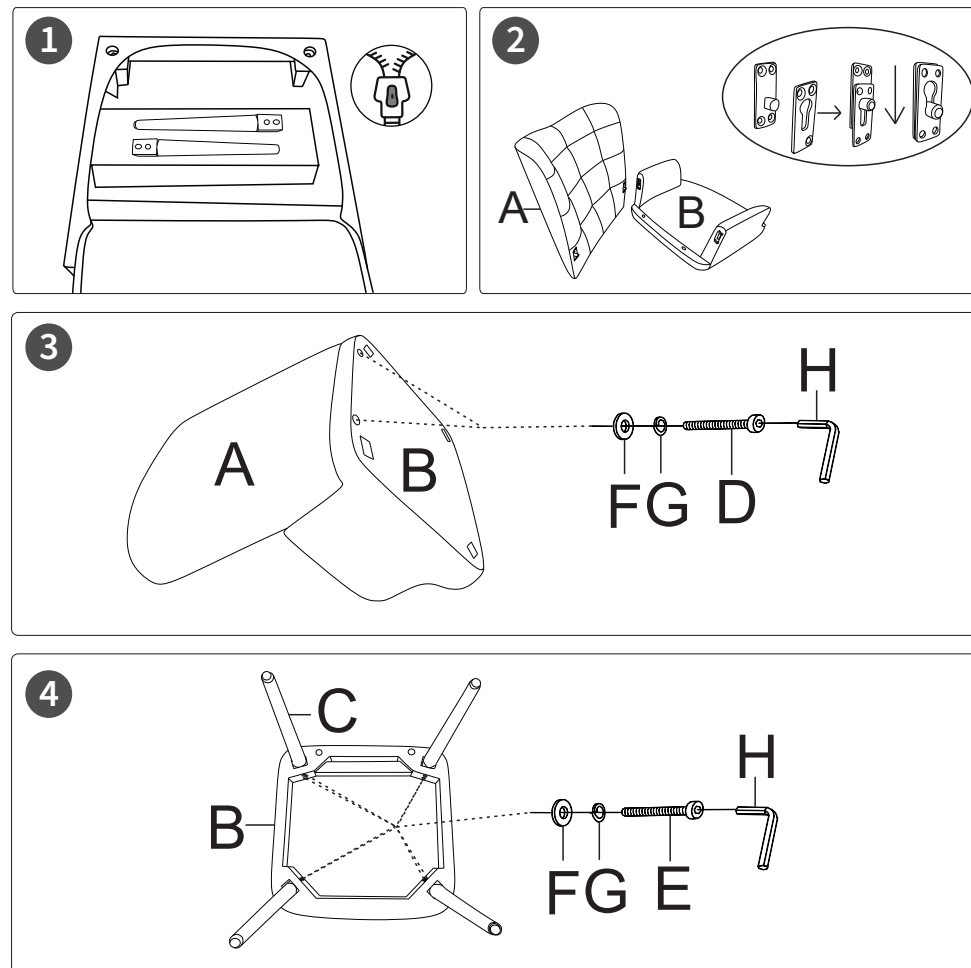


Instruction

NO	DESCRIPTION		QTY
A	Chair Back		1
B	Chair Seat		1
C	Leg		4
D	Screw1	$\Phi 5/16'' * 3-15/16'' L$ 	2
E	Screw2	$\Phi 5/16'' * 3-1/8'' L$ 	8
F	Flat Washer	$\Phi 5/16'' * 22mm$ 	10
G	Lock Washer	$\Phi 5/16''$ 	10
H	Allen Wrench	$\Phi 5mm$ 	1

Installation Method



- 1 Unzip the bottom of the seat and take of the inner box (include legs and Hardware bag)
- 2 Insert the backrest (A) into the seat frame (B), as shown, align the hole first and then press down, install. You can align the two holes at the same time and then install them, or you can install one side first and repeat them. Operate and install the other side.
- 3 Flip the assembled part, as shown, combine the long screw (D) with the locking washer (G) and the flat washer (F) and insert it into the hole to lock it.
- 4 As shown in the figure, combine the short screw (E) with the locking washer (G) and the flat washer (F) and insert it into the corresponding leg hole to lock.

Instruction Manual


User Guide

Make life better

Warm tips: We are proud of high-quality products and satisfactory service, but the goods may encounter special circumstances during transportation, if you receive the goods with missing or damaged parts, please take photos and contact our customer service before returning the goods , we will customize a solution that satisfies you, thank you.

Note:

1. During the assembly process of a product, if you need to install multiple screws, you can first align all the screws with the holes, first rotate a few times to fix the positions of all the screws, and after all the screws are aligned with the holes, use a wrench to completely tighten in turn.
2. Flat washers and lock washers must be installed to prevent the screws from loosening and damaging the joints.

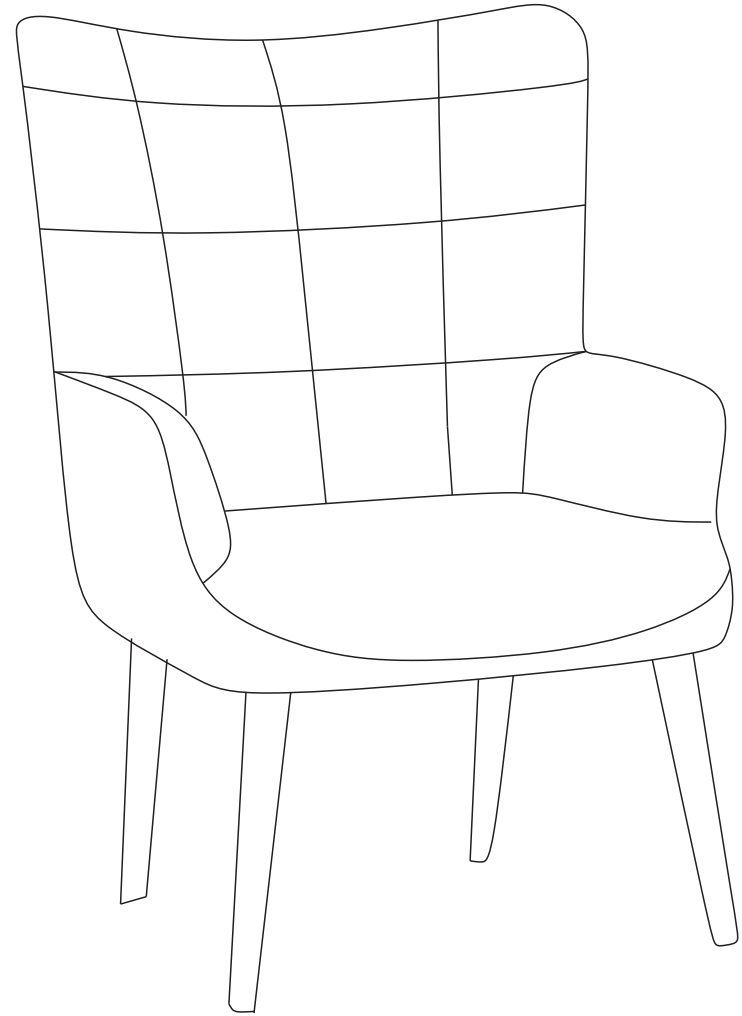

ACCENT CHAIR