

# Assembly Instruction

**CAUTION:** Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.



## Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth (use clean water, never a solvent) to wipe the interior surface of the fixture.

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time: 30 minutes

## Part List and Hardware List


| PIECE | DESCRIPTION       | PICTURE   | QUANTITY | PIECE | DESCRIPTION     | PICTURE  | QUANTITY |
|-------|-------------------|---|----------|-------|-----------------|--|----------|
| A     | Wire Nut          |  | 3X       | I     | Fixture Loop    |   | 1X       |
| B     | Mounting Plate    |  | 1X       | J     | Chain           |   | 1X       |
| C     | Bulb              |  | 4X       | K1    | Top Frame       |  | 1X       |
| D     | Mounting Screw    |  | 2X       | K2    | Bottom Frame    |  | 1X       |
| E     | Canopy            |  | 1X       | L     | Metal Cover     |   | 1X       |
| F     | Hanging Loop      |  | 1X       | M     | Socket Assembly |   | 1X       |
| G     | Canopy Nut        |  | 1X       | N     | Knurled Nut     |   | 4X       |
| H     | Closable link/cap |  | 2X       |       |                 |  |          |

# Installation

## Step 1


Unpack all parts from cartons carefully.

Insert the power cord of the Socket Assembly(M) to the Top Frame(K1),Metal Cover(L),Hanging Loop(I). Then fix the Top Frame(K1) by turning the Hanging Loop(I) clockwise till tight.

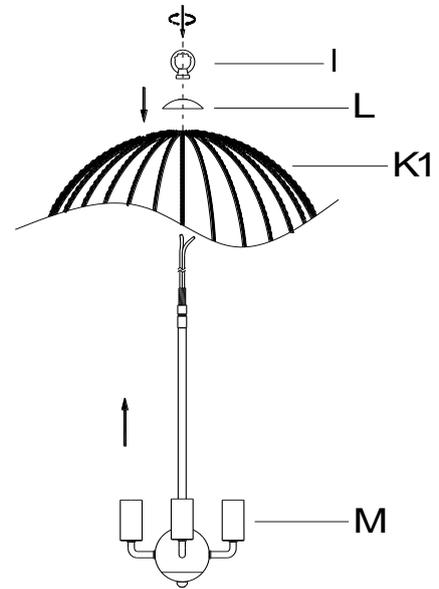

## Step 2

Screw the Chain(J) to the Hanging Loop(F) and the Fixture Loop (I) with Closable link/cap (H) as diagram.

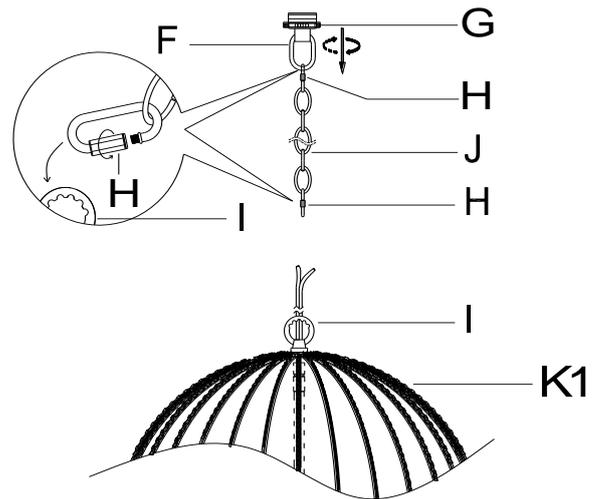


## Step 3

Weave the 2 wire power cord and bare ground wire through every other loop to the top of chain(J),center holes of Hanging Loop(F)&Canopy(E)&Mounting Plate(B) as diagram.


Insert the threaded tube of the Mounting Plate(B) into the center hole of the Hanging Loop(F),rotate the Mounting Plate(B) clockwise till tight.

Slide the Canopy Nut(G) then the Canopy(E) to the end of the Chain(J).

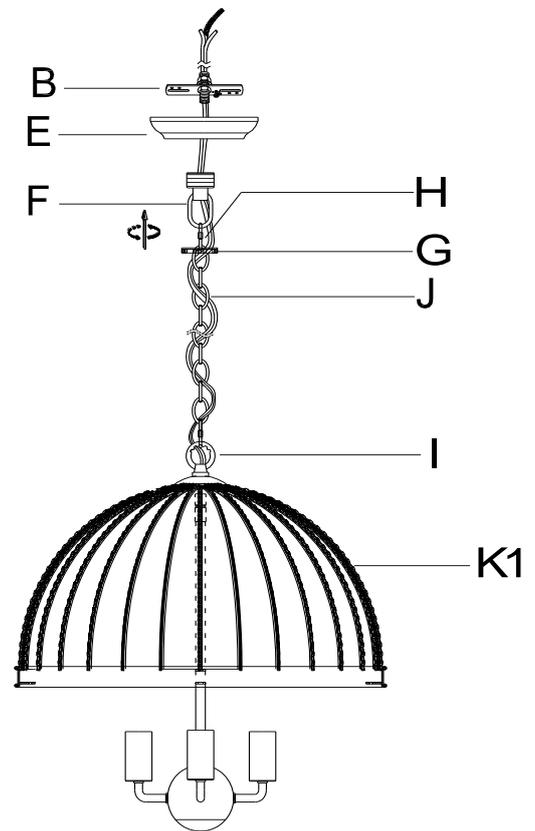


## Step 4 Wire connection

| Connect, Hot, Black or Red outlet Supply Wire to:           | Connect, Neutral, White Outlet Supply Wire to:             |
|---|--|
| Black   | White  |
| *Parallel Cord(round&smooth)                                | *Parallel Cord(square&ridged)                              |
| Clear, Brown, Gold or Black without Tracer(colored stripes) | Clear, Brwn, Gold or Black without Tracer(colored stripes) |
| Insulated Wire(not green)with copper metal conductor        | Insulated Wire(not green)with Silver metal conductor       |



\*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



### Grounding Instructions:

- For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

## Step 5


Attach the Mounting Plate (B) onto the junction box by inserting two Mounting Screws (D) and turning clockwise till tight.

Slide the Canopy (E) upward along the chain(J) till the ceiling surface. Fix the Canopy(E) by rotating the Canopy Nut(G)clockwise to engage it with the threaded portion of the Hanging Loop (F) until secure. Do not over tighten this nut.

Insert the bulbs(C) into the sockets(M) until secure. **DO NOT EXCEED THE SPECIFIED WATTAGE.**

Attach the Bottom Frame(K2) to the Top Frame(K1), aligning the corned holes then fix it with Knurled Nuts(N) clockwise till tight.

**PLEASE USE TYPE "B" BULB MAX 40-WATT OR CFL BULB MAX 9-WATT OR LED MAX 9-WATT THERE ARE 4 X 4W LED BULBS IN THE BOX.**

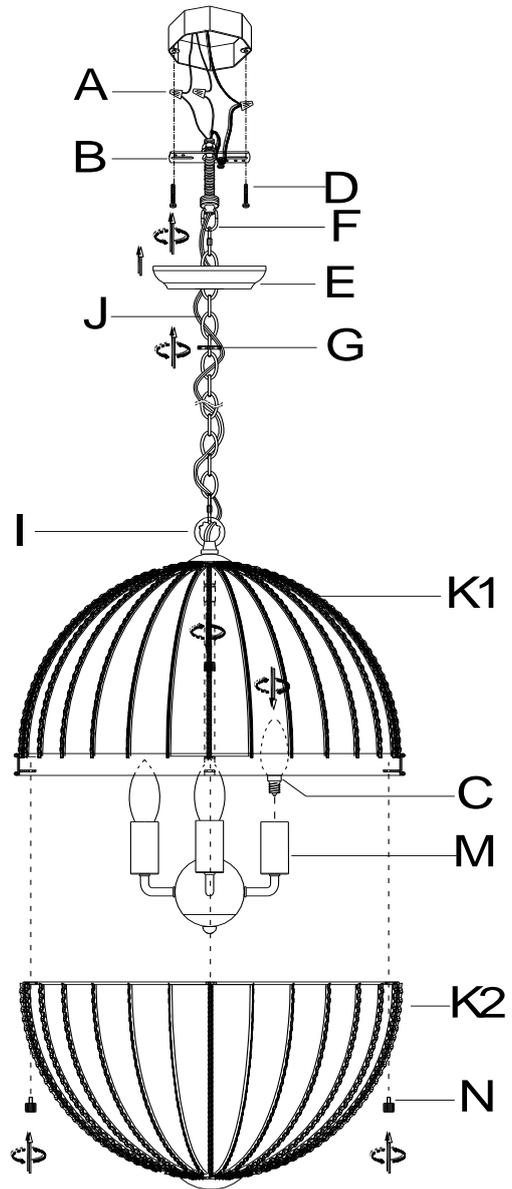

## Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP