
Assembly Instructions


Parts						
NO.	Picture	Description	Size	QTY		
A		Metal frame	83*42*8CM	2		
В		Metal tube	66.9*1.9*1.9CM	2		
С		Metal tube	66.9*1.9*2.7CM	2		
D		Metal tube	66.9*1.9*1.9CM	2		
E		Metal tube	66.9*1.9*2.7CM	2		
F		Glass shelf	66.6*37.9*T6	2		

Hardware


NO.	Picture	Description	Size	QTY
G		Bolt	1/4*10MM	24
I		Allen Key	6ММ	1
J		Wheel with brake	2"	2
K		Wheel	2"	2
L	S===3	Wrench		1

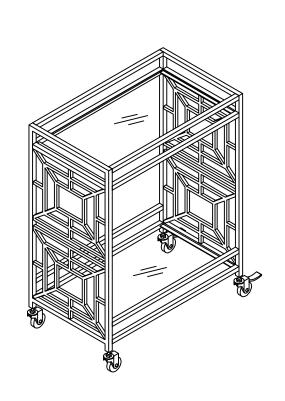

STEP:1. Insert parts"B, C, D, E" into the corresponding male dowels of Metal Frame (A) as diagram shown, then insert the bolt (G) into the corresponding hole of each assemblied part and tighen them an allen wrench accordingly.

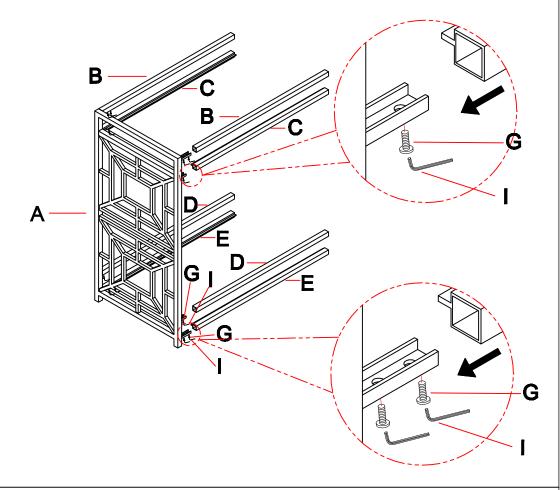

STEP:2. Repeat Step 1 to assembly the assemblied part (B/C/DC/) with another metal frame (A) as diagram shown.

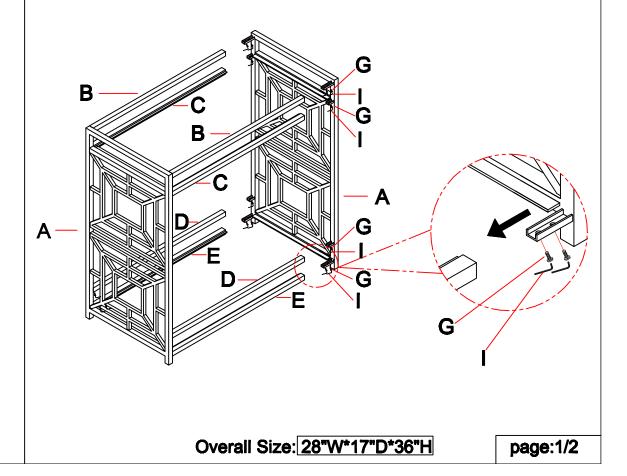


Assembly Instructions


Parts						
NO.	Picture	Description	Size	QTY		
Α		Metal frame	83*42*8CM	2		
В		Metal tube	66.9*1.9*1.9CM	2		
С		Metal tube	66.9*1.9*2.7CM	2		
D		Metal tube	66.9*1.9*1.9CM	2		
E		Metal tube	66.9*1.9*2.7CM	2		
F		Glass shelf	66.6*37.9*T6	2		

Hardware	Н	ar	ď	W	a	re
----------	---	----	---	---	---	----

NO.	Picture	Description	Size	QTY
G		Bolt	1/4*10MM	24
1		Allen Key	6ММ	1
J		Wheel with brake	2"	2
K		Wheel	2"	2
L	S3	Wrench		1

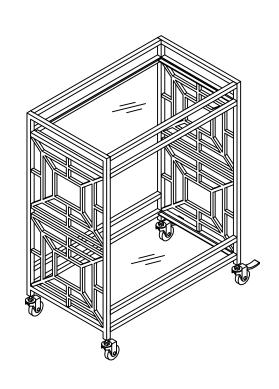

STEP:3. Lay down the assemblied metal frame on a clean and soft surface, then insert the Wheel with brake (J) and Wheel (K) into the bottom of legs as diagram shown, and tighten them with wrench (L).

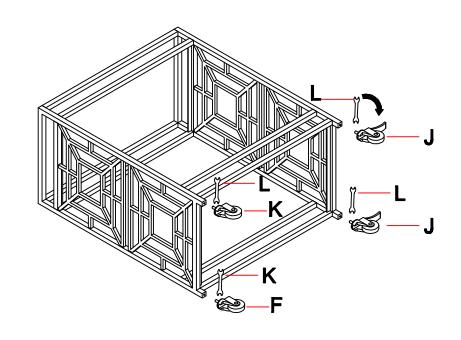

STEP:4. Put the glass shelves (F) onto the top frames as diagram shown.

