

ASSEMBLY AND INSTALLATION INSTRUCTIONS


Item No: DD035-1-BG

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTES:

1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

1-light pendant light

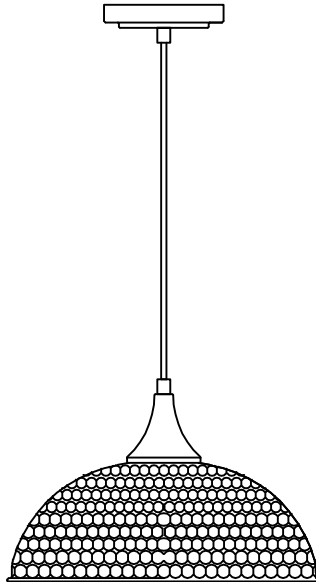

TOOLS REQUIRED




**Flathead
Screwdriver**



**Phillips
Screwdriver**



Ladder



Wire Strippers



Pliers



**Electrical
Tape**



Wire Cutters



Safety Glasses

PREPARATION

Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.


PART LIST AND HARDWARE LIST

| PIECE | DESCRIPTION | QUANTITY |
|-------|----------------------|----------|
| A | Wire nut | 3 |
| B | Outlet box screw | 1 |
| C | Mounting bracket | 1 |
| D | Mounting screw | 2 |
| E | Screw | 2 |
| F | Flathead screwdriver | 1 |

| PIECE | DESCRIPTION | QUANTITY |
|-------|--------------|----------|
| G | Fixture body | 1 |
| H | Shade | 1 |
| I | Socket ring | 1 |

INSTALLATION

- Adjust wire length and screw tight by Flathead screwdriver(F).
- Attach the mounting bracket (C) to the junction box with the mounting screw (D).
- Attach the supply circuit ground wire (green or bare copper wire) to the fixture ground wire, black to (black) and white to (white).

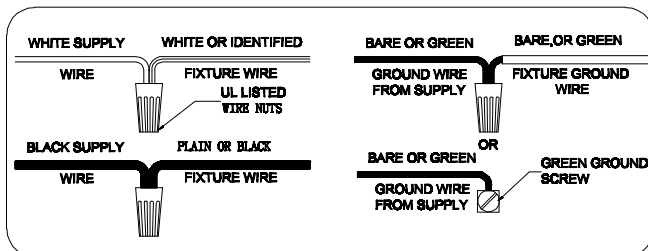

- Attach the canopy (G1) to the mounting bracket (C) with the screw (E).
- Attach the shade (H) to the socket with the socket ring (I), finally install the bulb (not included) into the socket.

If you have any questions, please contact us, our warmest customer service will assist you within 24 hours.

 yklitg_service@outlook.com

