


Credenza/Bufet

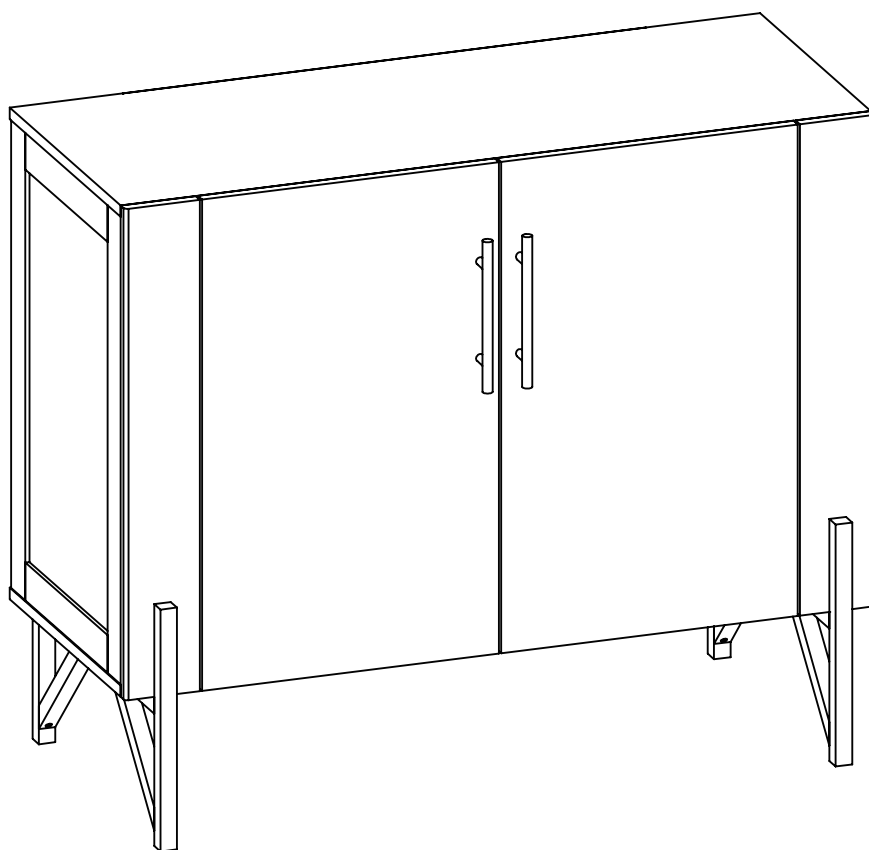


ASSEMBLY INSTRUCTION


ADULT ASSEMBLY REQUIRED

**THE PRODUCT MAY RECOMMENDED
ASSEMBLING BY MORE THAN ONE
PERSON.**

**PLEASE ASK FOR ASSISTANCE AT YOUR
CONVENIENCE BEFORE ASSEMBLING.**

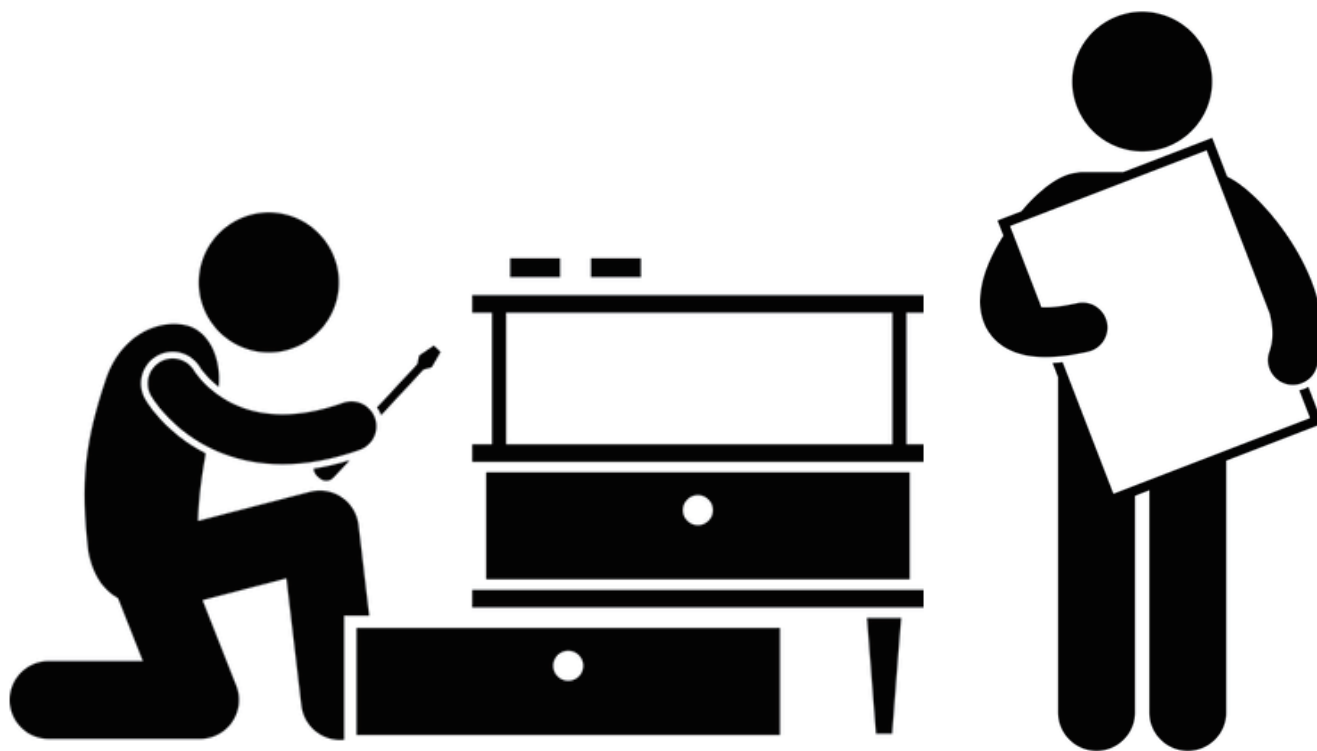

Before You Start

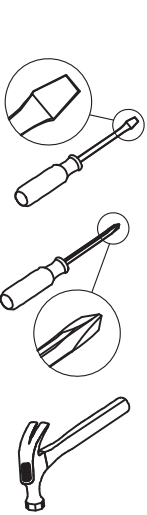

Read through each step carefully and follow the proper order

Separate and count all your parts and hardware

Give yourself enough room for the assembly process


Have the following tools: Flat Head Screwdriver, #2 Phillips Head Screwdriver and Hammer

Caution: If using a power drill or power screwdriver for screwing, please be aware to slow down and stop when screw is tight. Failure to do so may result in stripping the screw.


Cam Lock Fastening System

This Cam Lock Fastening System will be used throughout the assembly process.


1

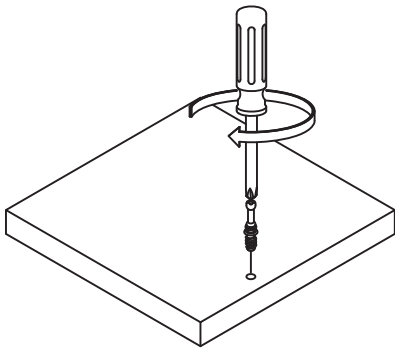


2

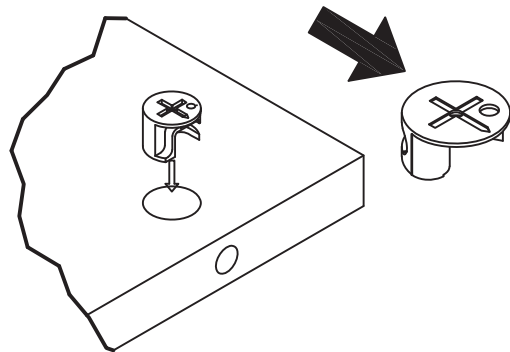


3

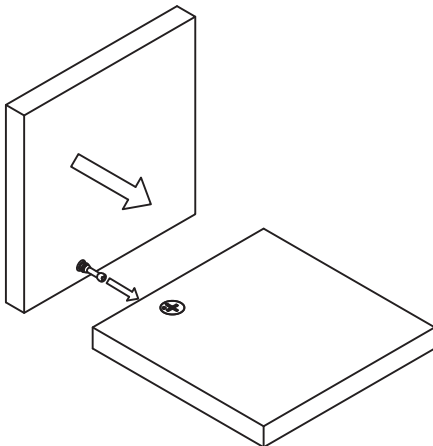


4

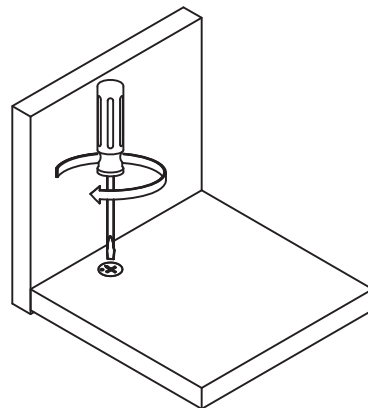

Parts Identification

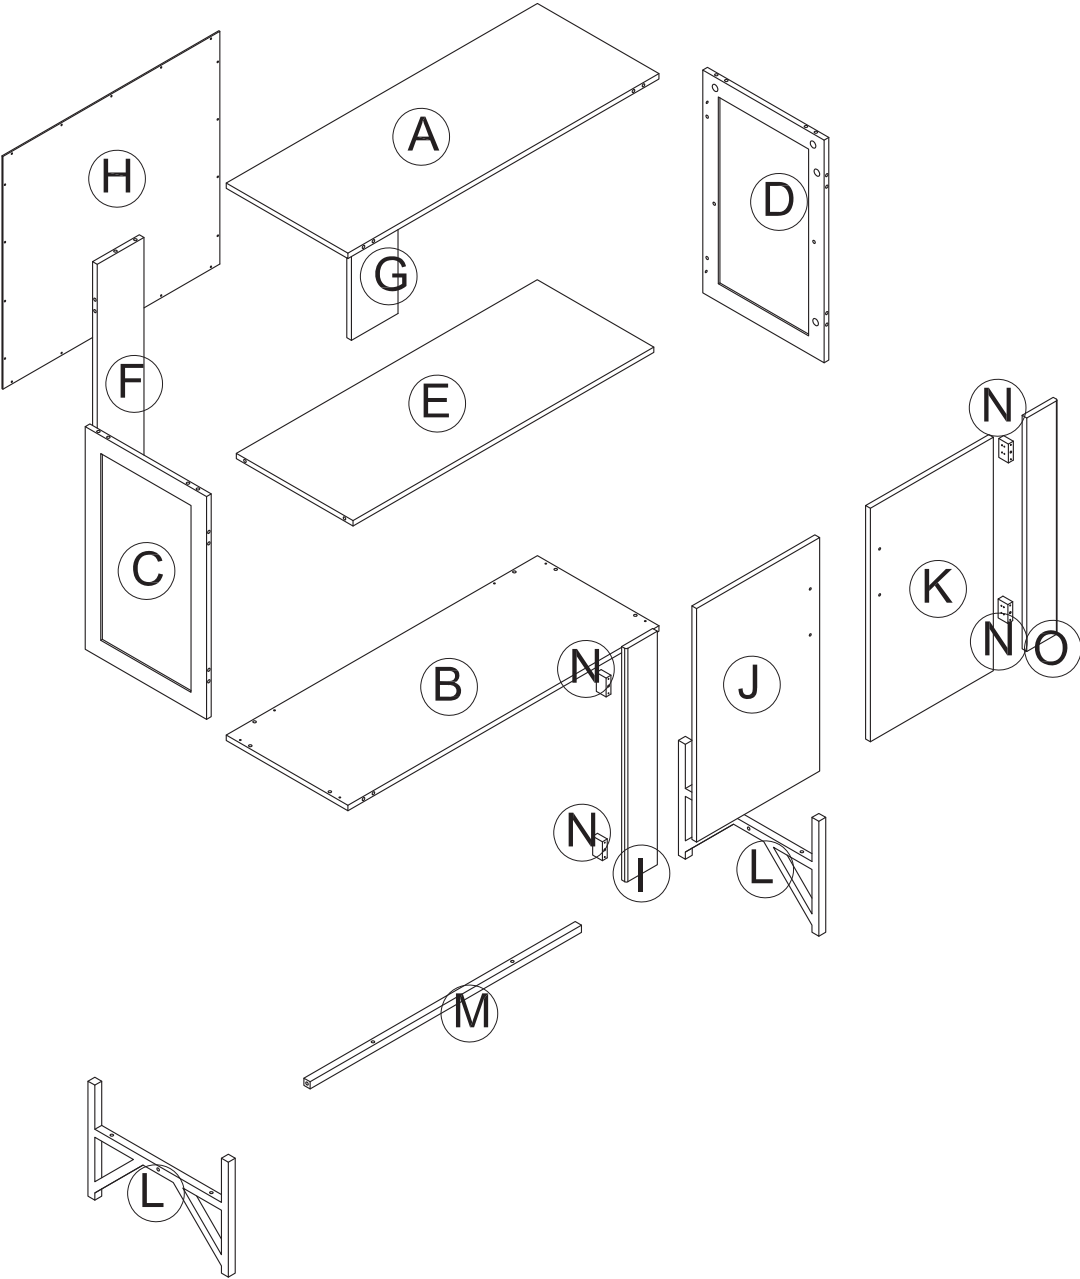


Parts Identification

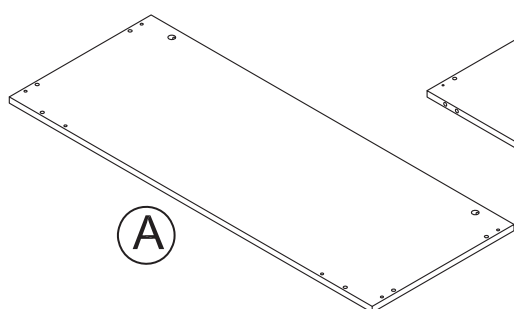


(A)

TOP

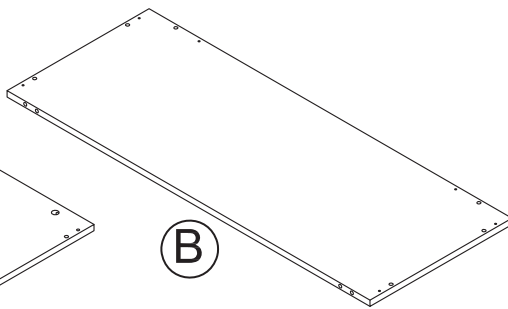


(B)

BOTTOM

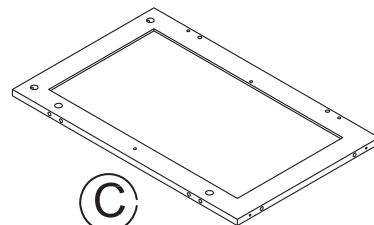


(C)

LEFT

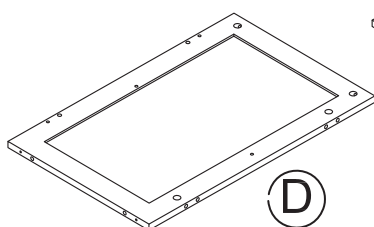


(D)

RIGHT

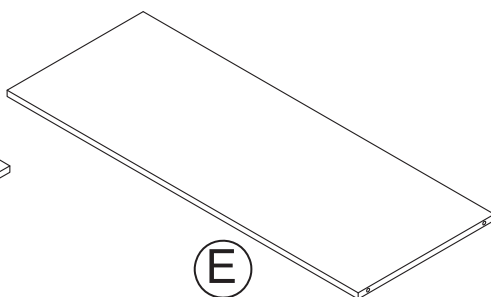


(E)

SHELF




(F)

BACK LEFT DECOR




(G)

BACK RIGHT DECOR

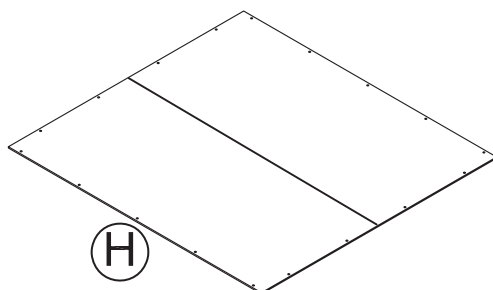


(H)

BACK PANEL




(I)

FRONT LEFT DECOR

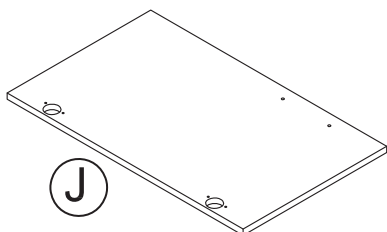


(J)

LEFT DOOR

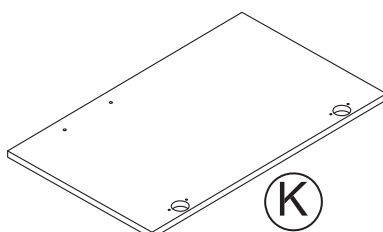

(K)


RIGHT DOOR

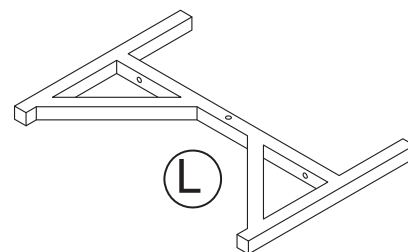


(L)

RIGHT AND LEFT END x 2


Parts Identification



LOWER SUPPORT




INNER SIDE SUPPORT x 4




FRONT RIGHT DECOR

Hardware Identification

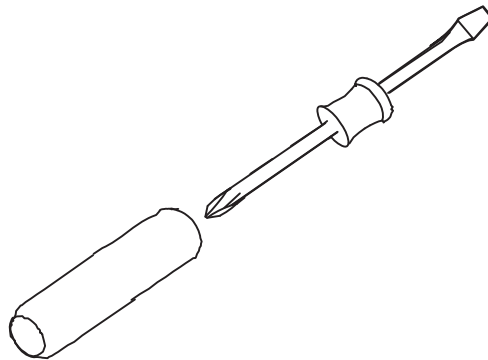


DOUBLE-HEADED SCREWDRIVER:
THIS TOOL ALLOWS YOU TO USE DIFFERENT HEAD FOR DIFFERENT
TYPE OF SCREWS BY SWITCH THE YELLOW HANDLE


Hardware Identification




CAM BOLT
QTY: 22+1 spare




CAM LOCK
QTY: 22+1 spare




WOOD DOWEL
QTY: 28+1 spare

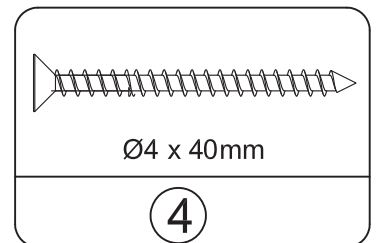


SCREW
QTY: 6+1 spare




BOLT
QTY: 6+1 spare




BOLT
QTY: 10+1 spare




HEX KEY
QTY: 1




SCREW
QTY: 18+1 spare




EUROPE HINGE
QTY: 4




SCREW
QTY: 24+1 spare



BOLT
QTY: 4+1 spare





HANDLE
QTY: 2




TIPPING RESTRAINT
HARDWARE KIT
QTY: 1





Step 1




Assemble screws
(part#1) vertically



Make sure screws are
lock up evenly on board

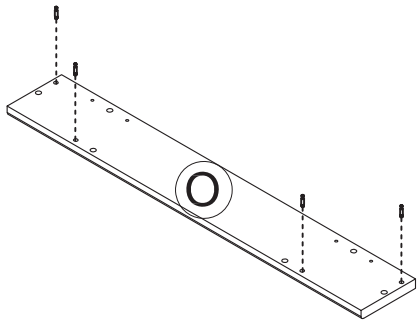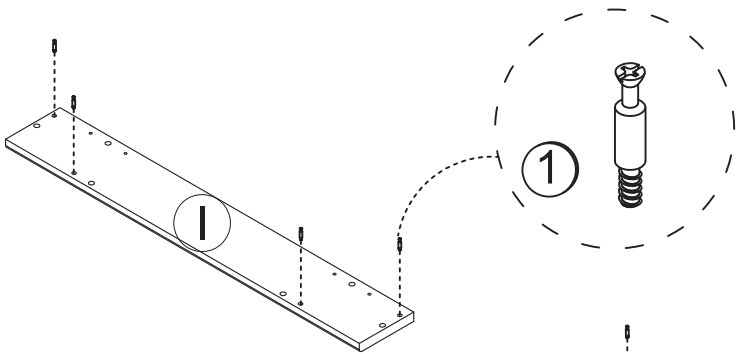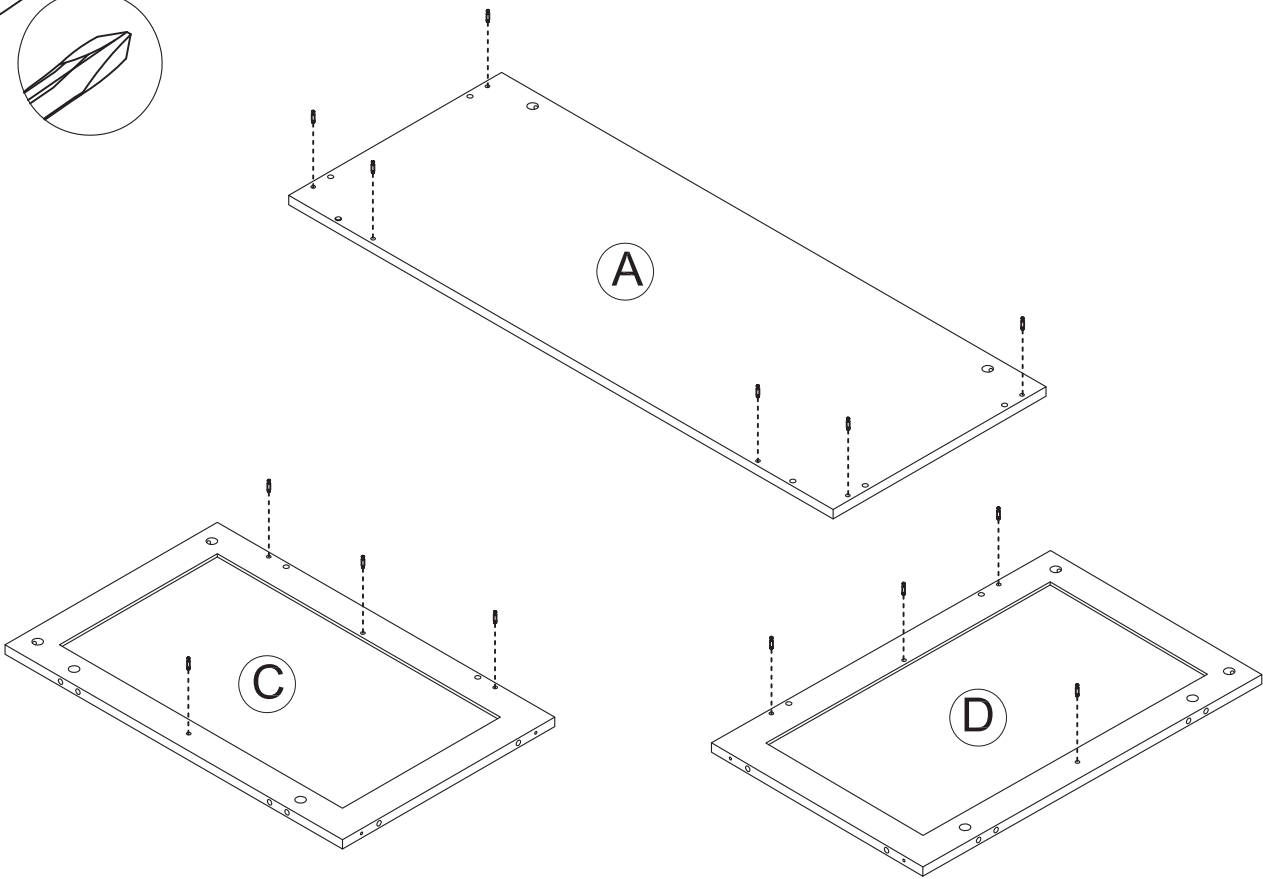

Step 2



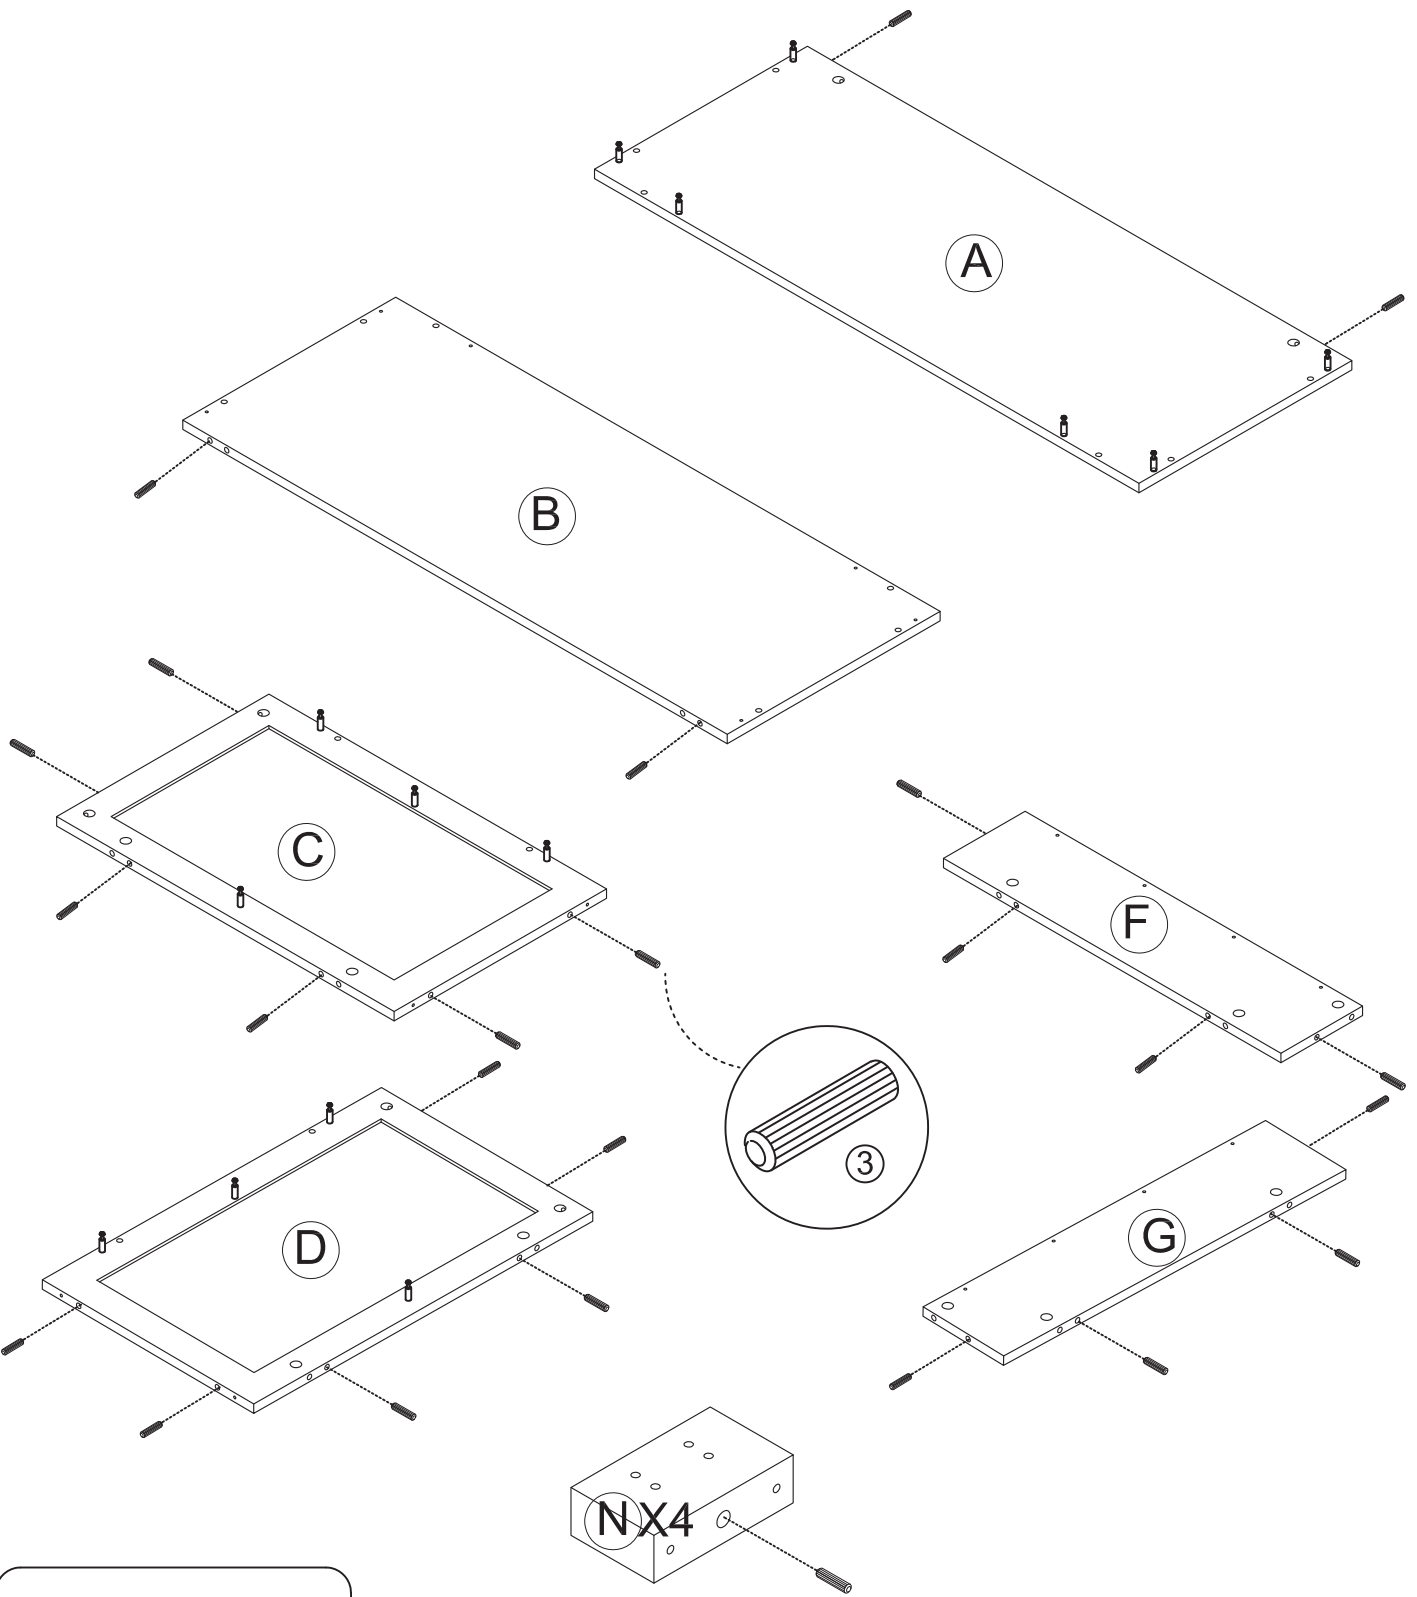




3




x 28

Step 3

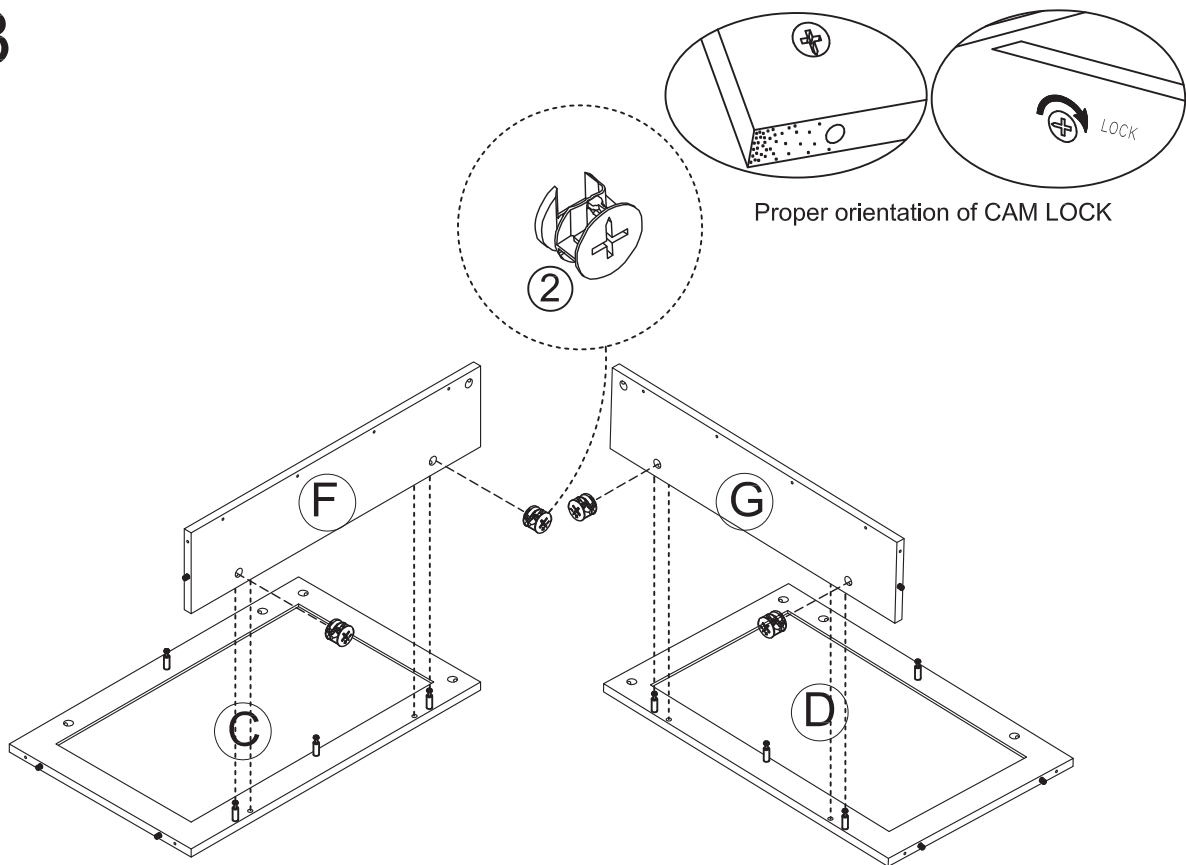


Proper orientation of CAM LOCK

Step 4

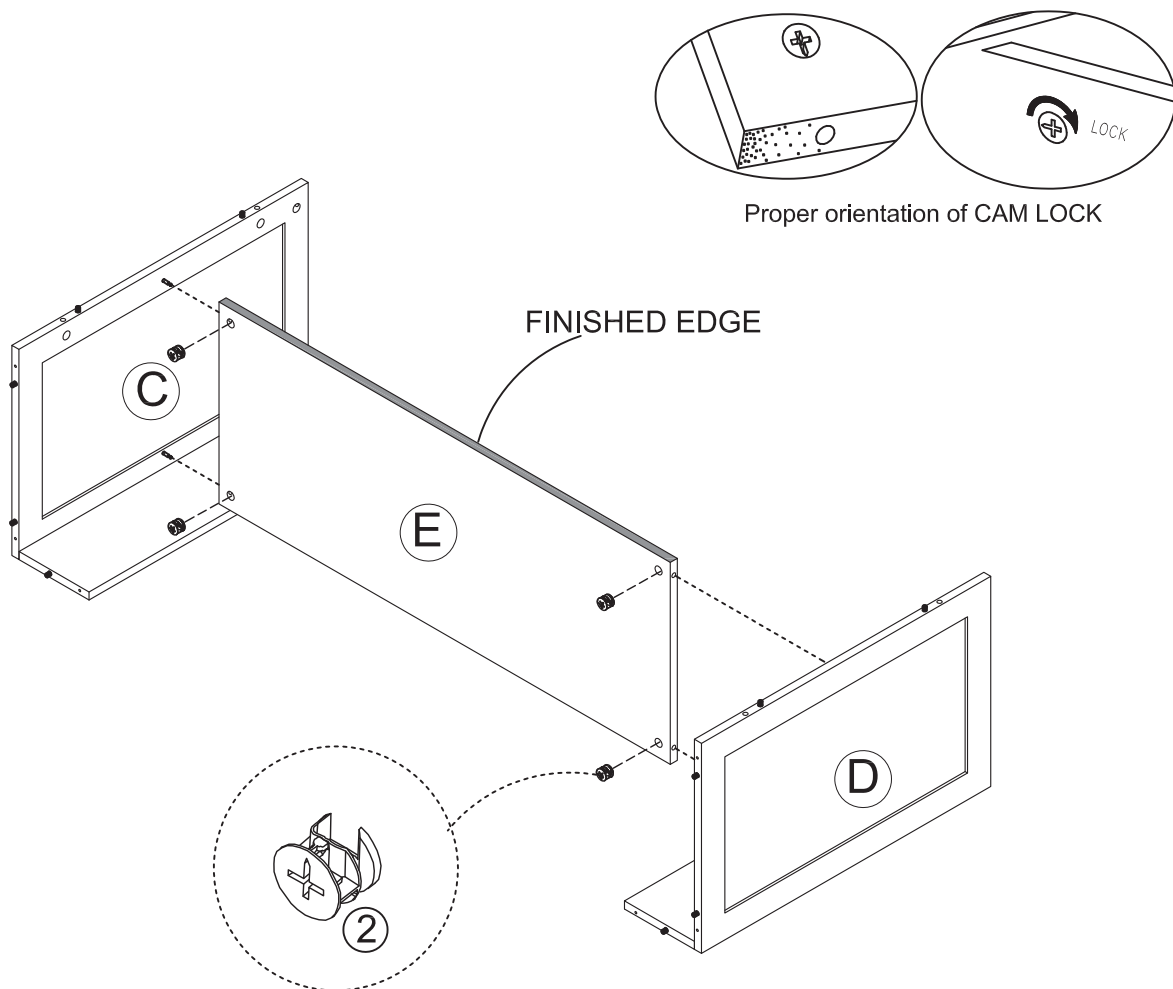


Proper orientation of CAM LOCK


Step 5

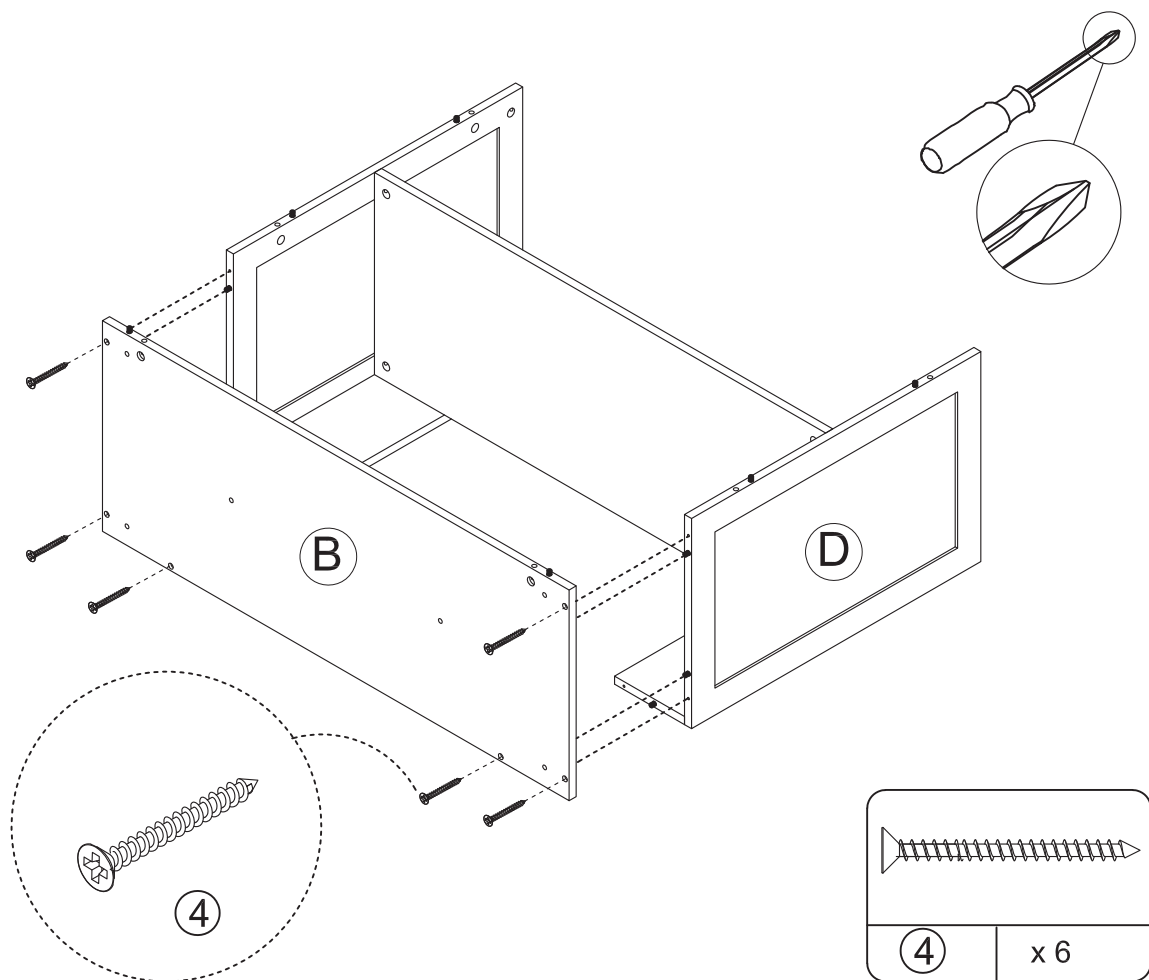

Step 6

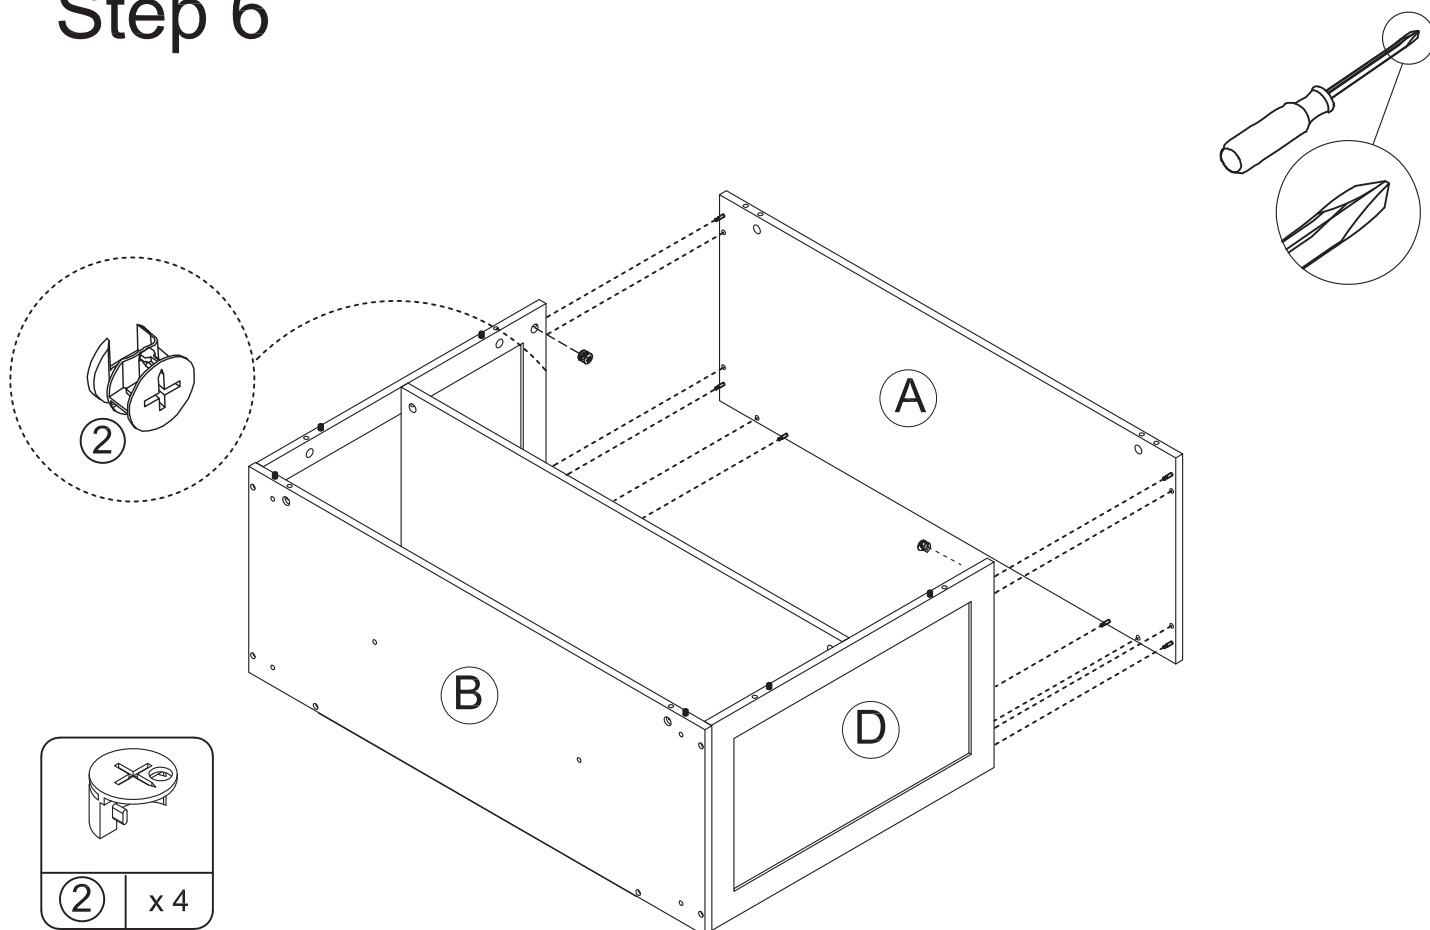


Step 7

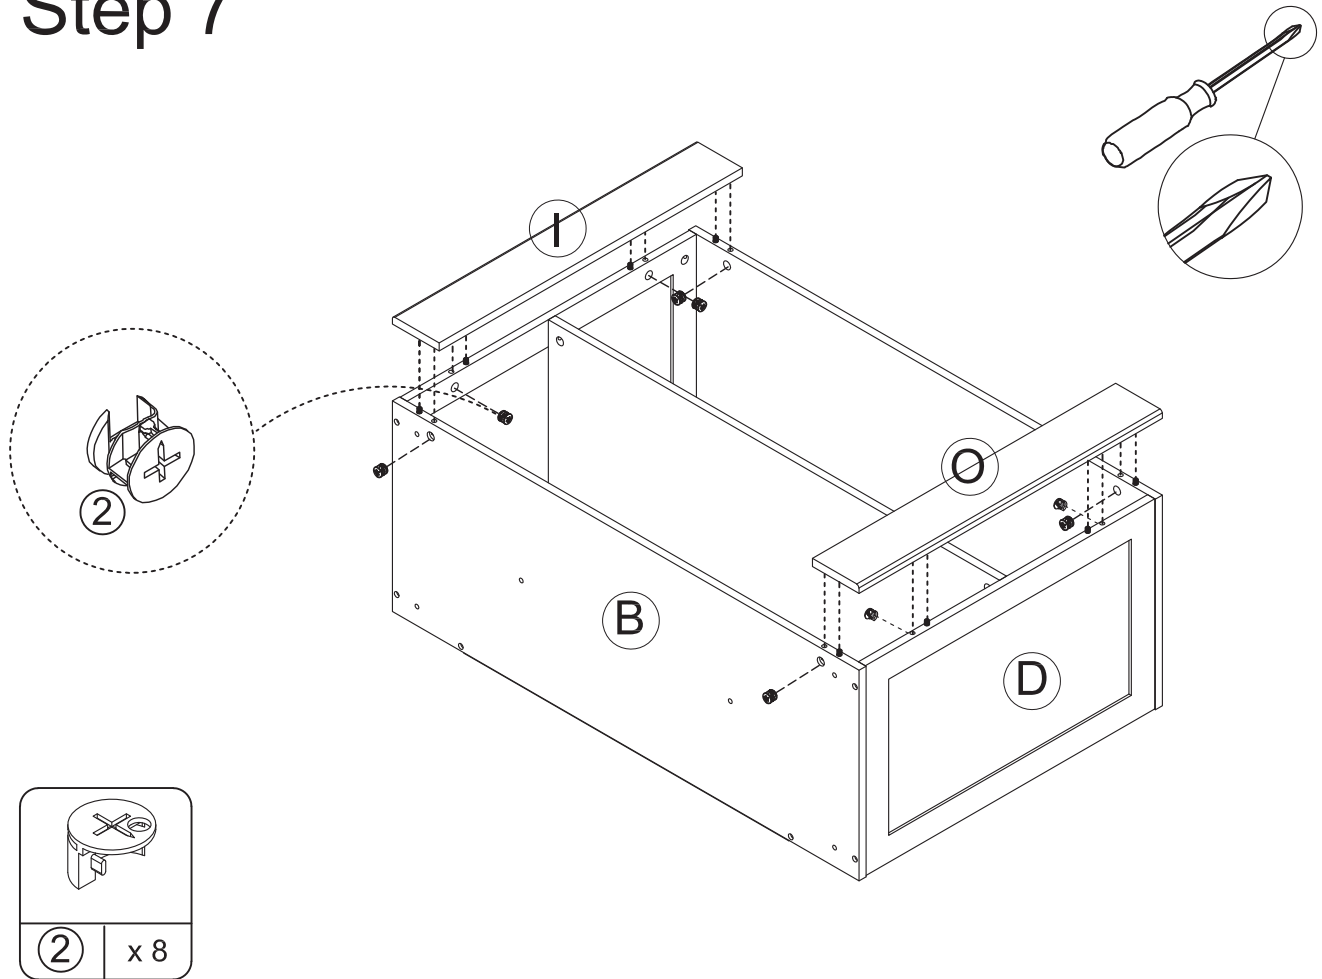





Step 8

Do Not Screw Hardware Part 6 Tightly At This Step


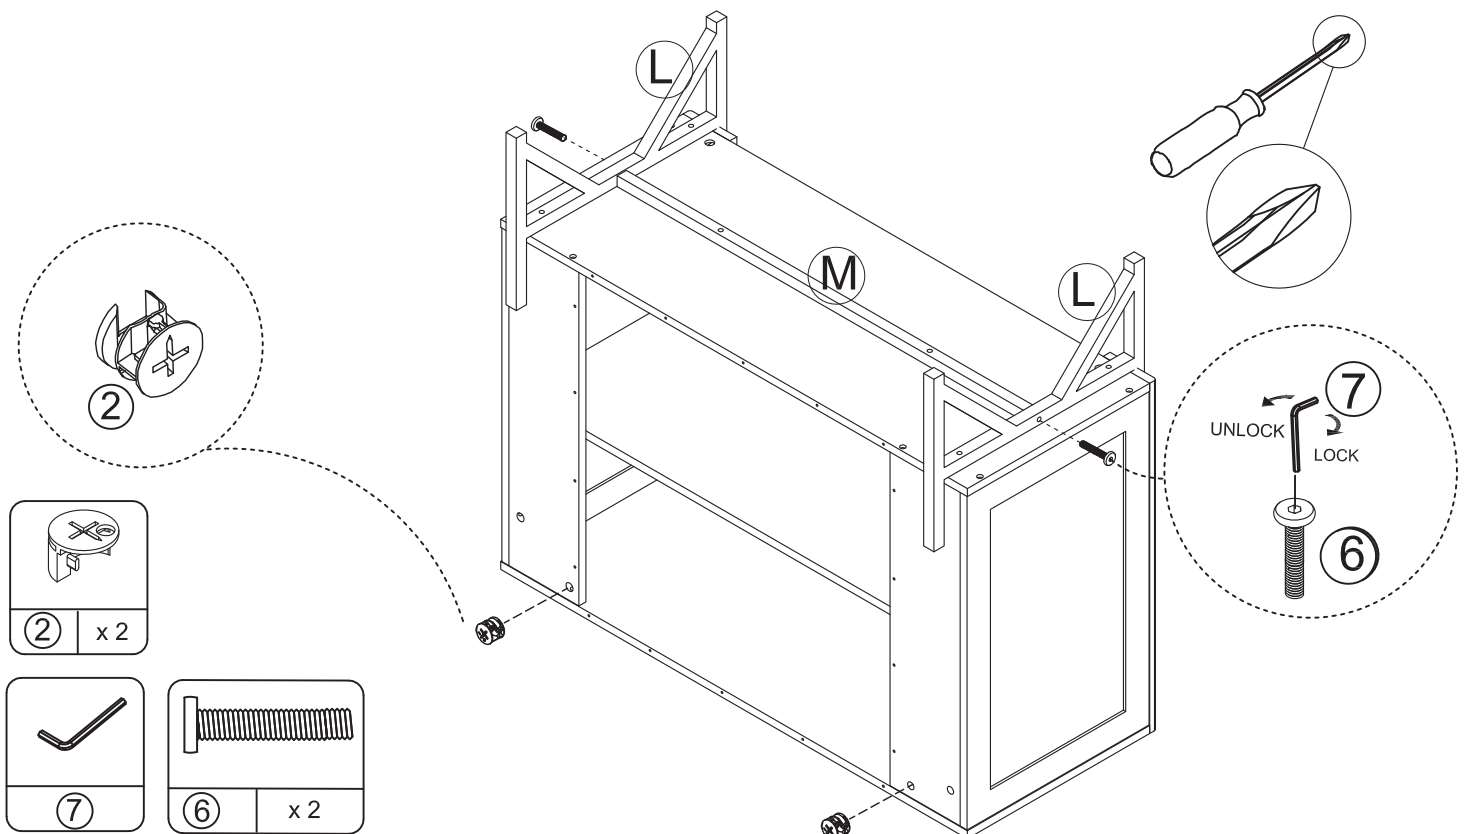


Step 9


Please Lock All Screws Tightly At This Step

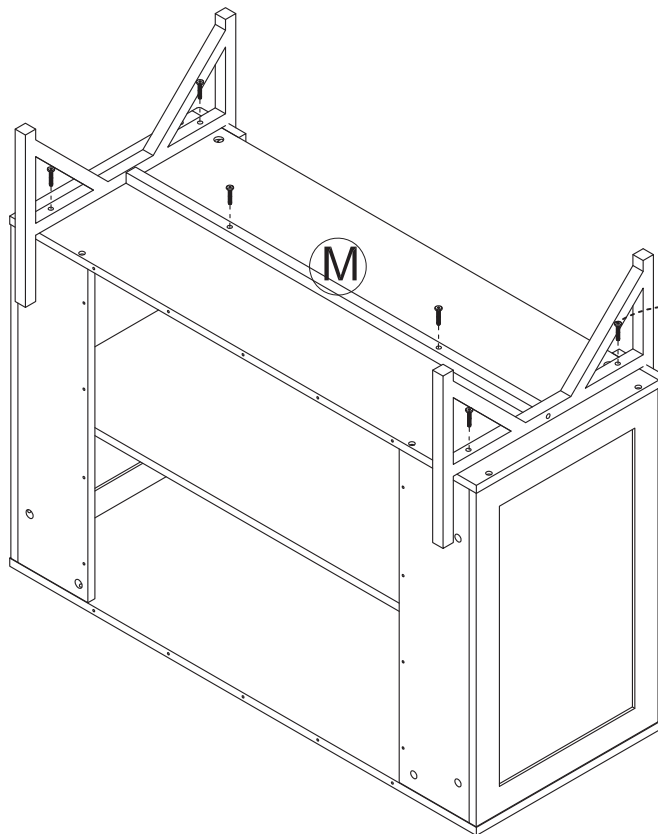




Step 10

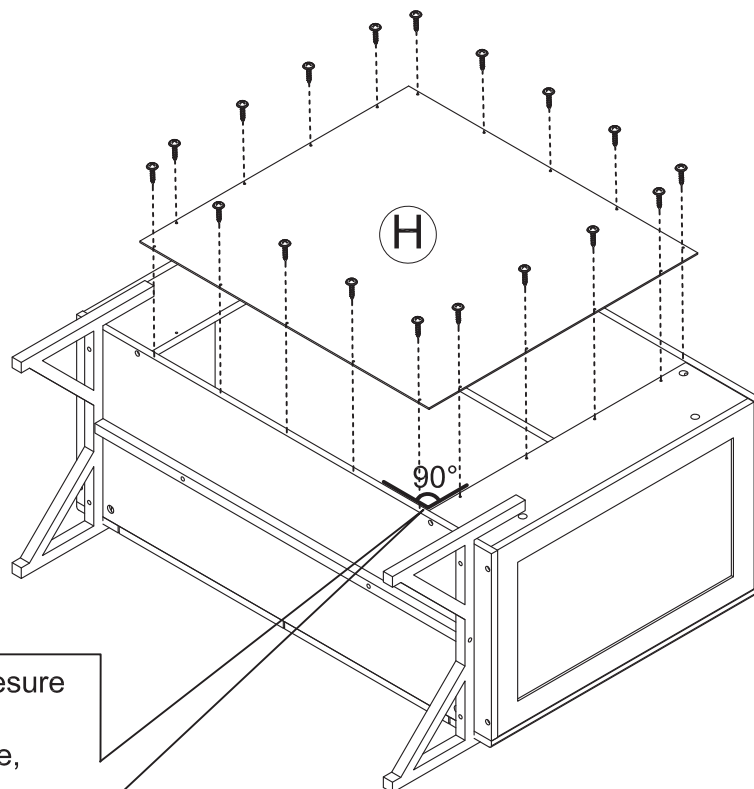



Before attaching the back panel, besure that the unit is at 90°
 Avant d'attacher le panneau arrière, assurez-vous que l'unité est à 90°
 Antes de fijar el panel posterior, asegúrese de que la unidad esté a 90°








Step 11

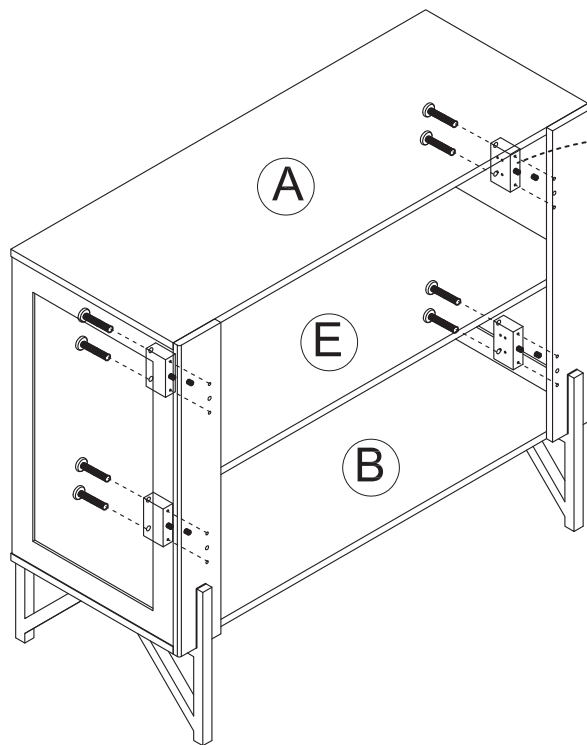




Holes need to be placed facing outside





Step 12

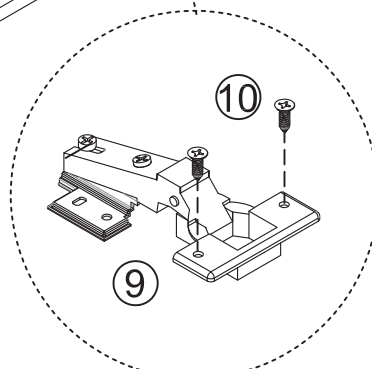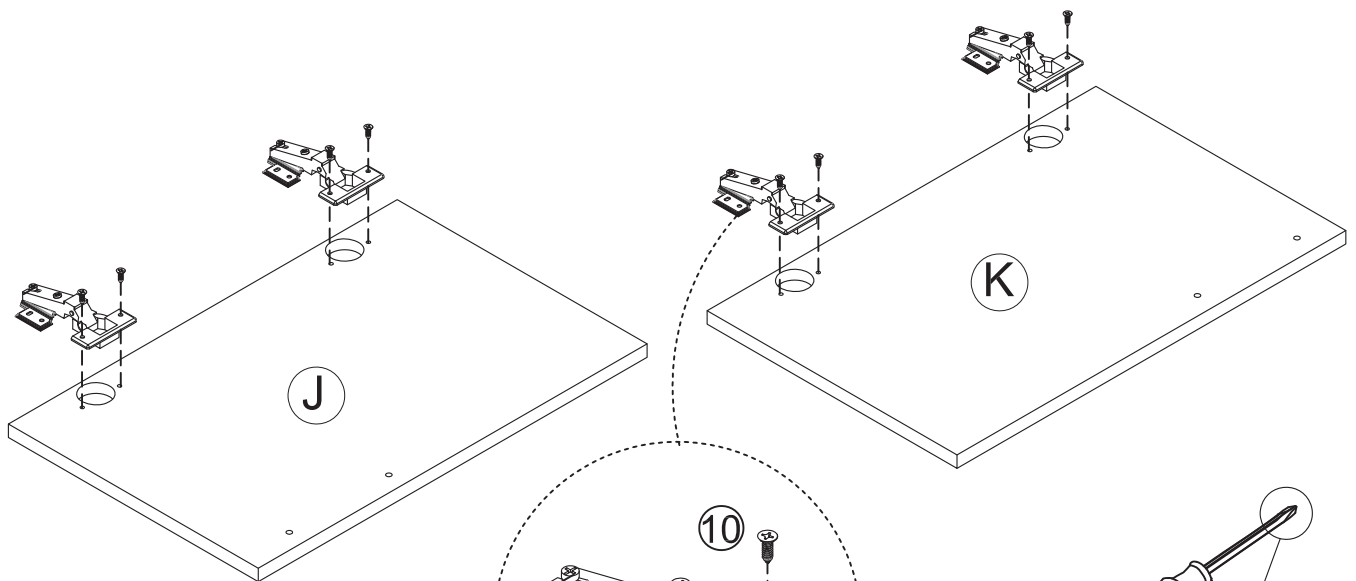





Step 13



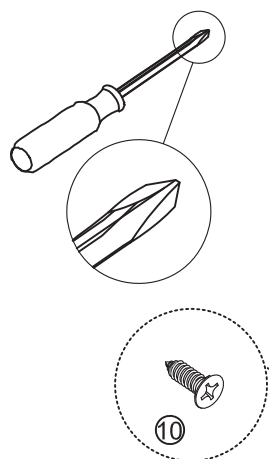


Make sure parts "J" and "O" are assembled aligning with parts "H" and "T"

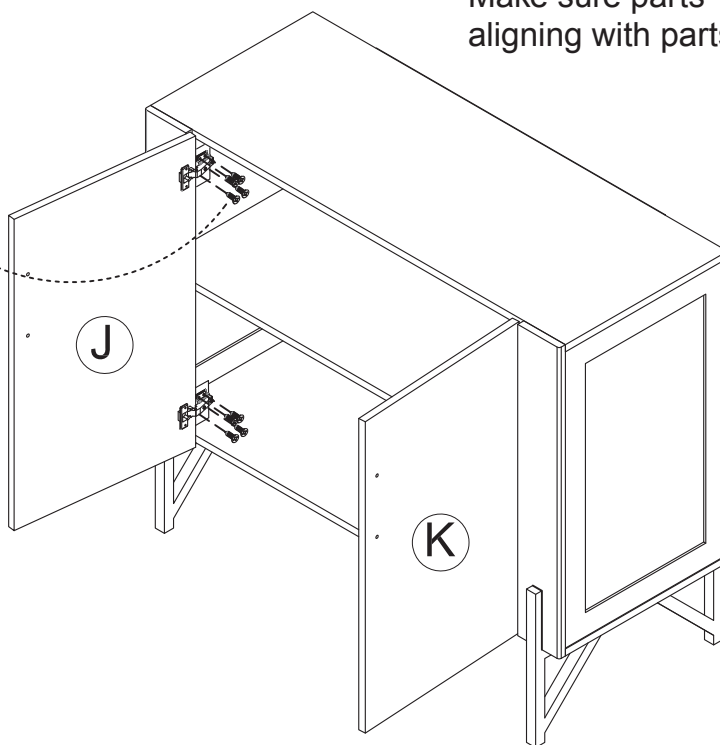



Step 14

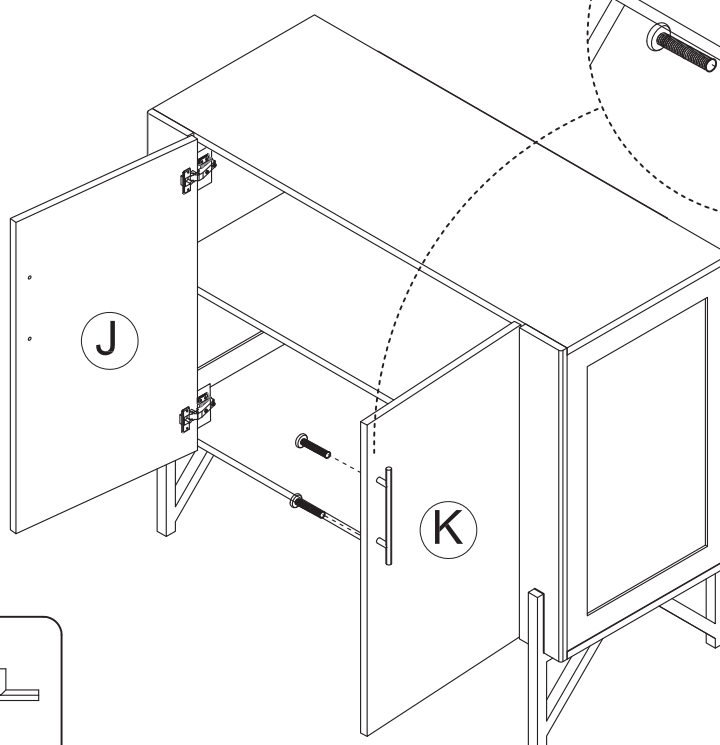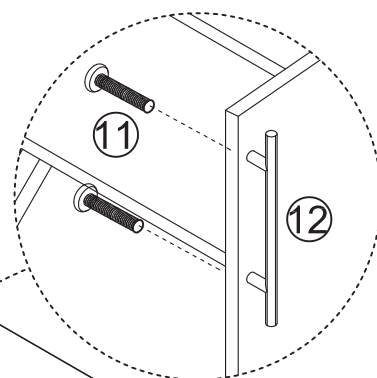

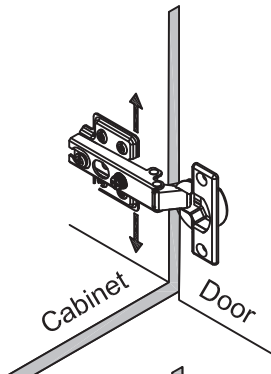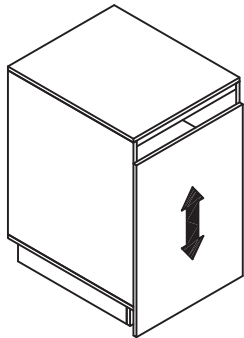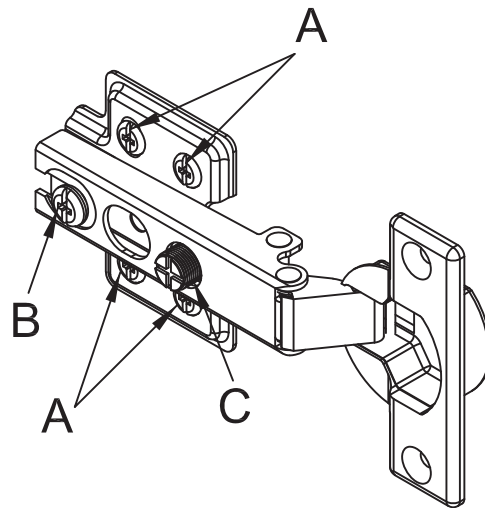



To adjust the vertical height.

Loosen the four screws "A" on both hinges. Two of them are usually in slotted holes which allows you to adjust up or down by a few mm. Then tighten back up.

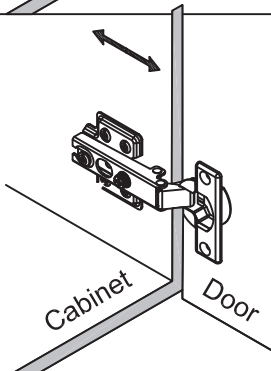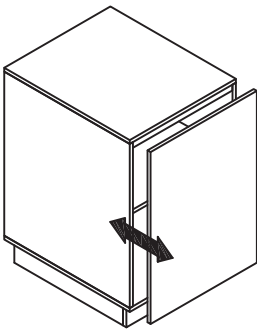

To adjust depth.


Loosen screw "B" and adjust door, if the door can not be adjusted, please loosen screw "C", then try again. Tighten screw "B" and "C".

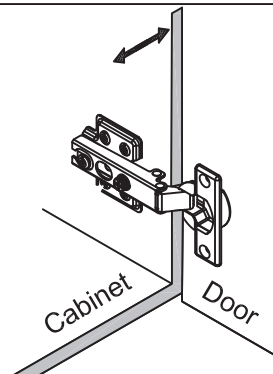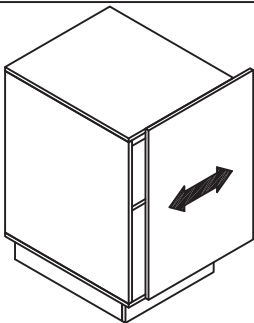




To adjust side ways.

Turning the screw "C" on BOTH hinges on each door.

Step15



PART LIST	FIGURE	QUANTITY	DESCRIPTION
13.1		2PC	LONG SCREW (Dia.4mmX38mmL)
13.2		2PC	SHORT SCREW (Dia.4mmX19mmL)
13.3		4PC	METAL "L"BRACKET
13.4		2PC	PLASTIC ANCHOR
13.5		2PC	CABLE

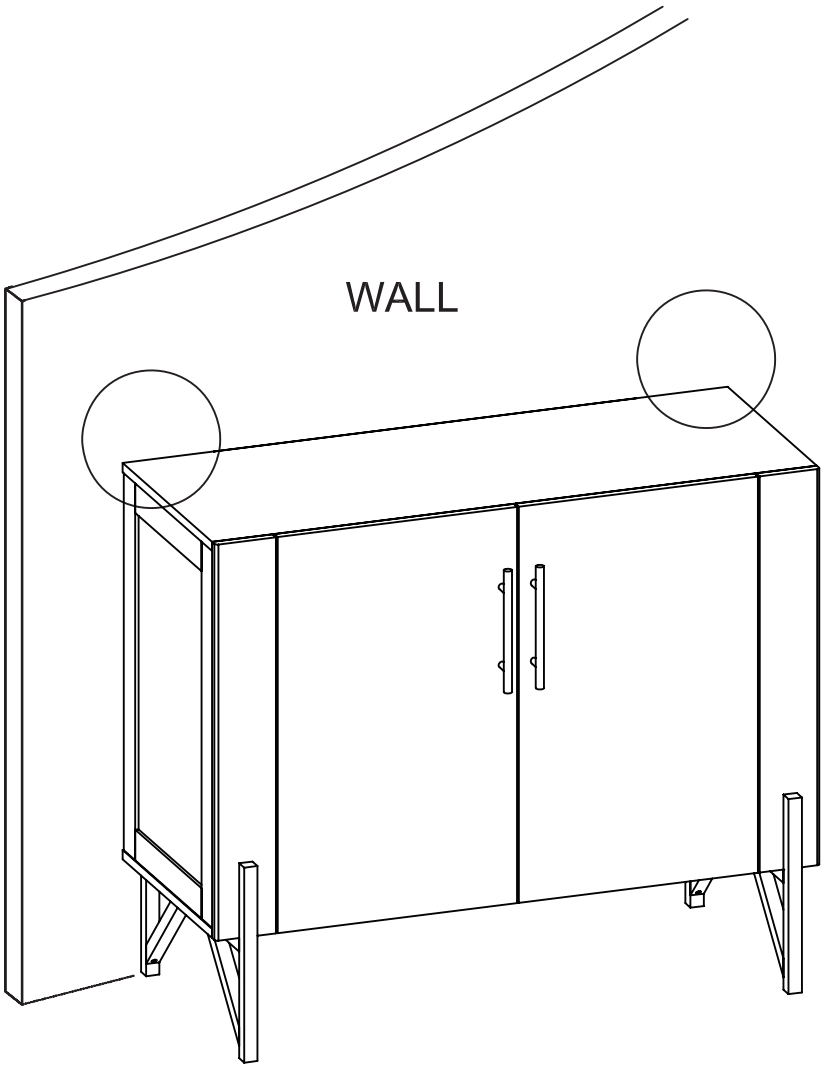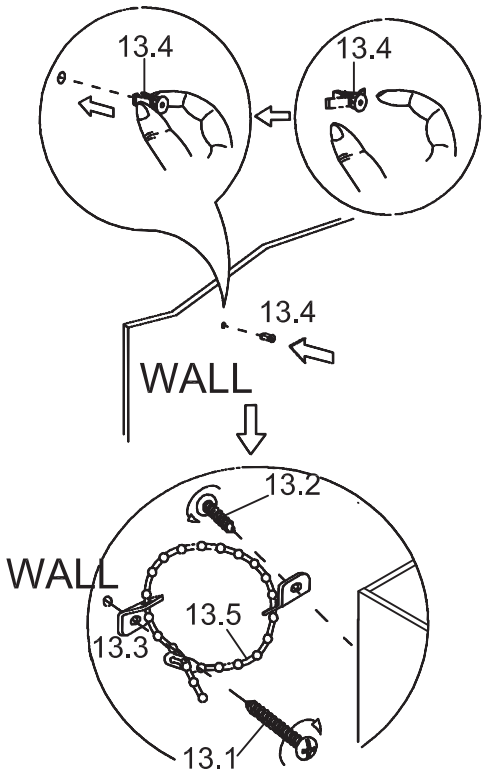


Follow the instructions printed on the plastic bag containing the tipping restraint hardware to attach thetip-over restraints to the unit and the wall.

NOTE:The tipping restraint hardware included is for drywall construction. It will be necessary to drill holes for the wall anchors. Depending upon your wall construction, different anchor hardware mayberequired. Please contact your local hardware store for assistance.

Safety Maximum Loads

This unit has been designed to support the maximum loads shown. Exceeding these load limits could cause sagging, instability, product collapse, and/or serious injury.

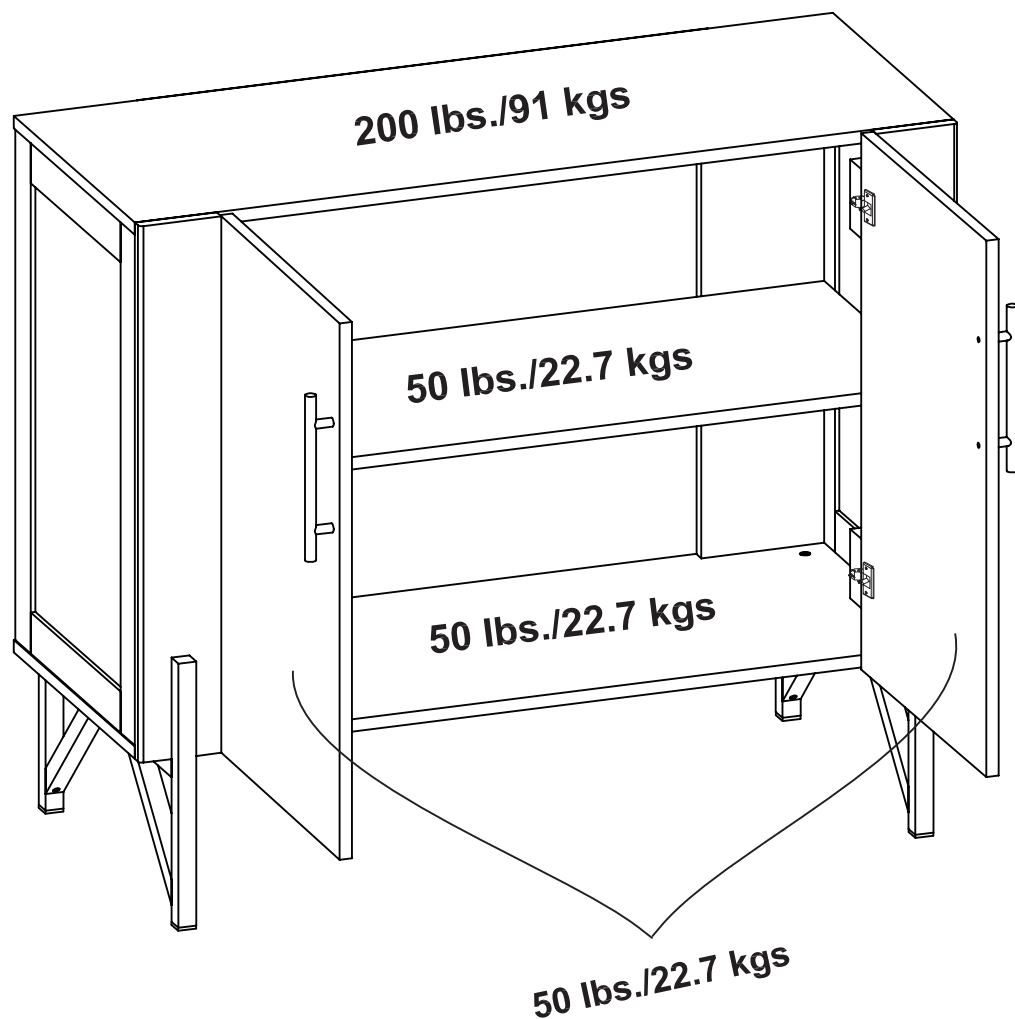

WARNING

Please make sure that all objects are removed before moving the assembled unit. The unit must be team lifted, not dragged or pushed. Failure to do so could cause instability, product collapse, and/or serious injury.