

# ACT3034 - Single Lever Swan

Product Finish: Chrome

EAN13 barcode: 5060879990128



## Product features:

- Metal construction throughout
- Single lever control for effortless single handed control
- Custom designed for lower to mid pressures
- Supplied complete with flexible tail pipes for fast simple fitting
- Antisplash spout supplied as standard


## Additional information / Parts included:

1 x metal horseshoe, 1 x rubber horseshoe, 1 x fixing nut, 1 x rubber seal

## Primary WRAS fittings number (see [www.wras.co.uk](http://www.wras.co.uk)):

2106307

## Product dimensions:

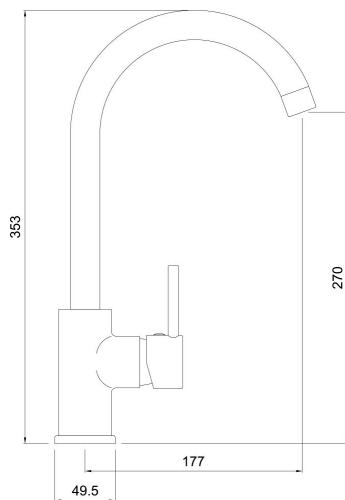


- **Overall Height / projection:** 353 mm
- **Exit reach:** 177 mm
- **Exit height:** 270 mm
- **Centre distance(s):** n/a
- **Base diameter(s):** 49.5 mm
- **Recommended hole diameter:** Ø35 mm
- **Max. surface depth:** 50 mm
- **Spout diameter:** 24 mm
- **Spout aerator size:** M22 x F

## Packaged properties:

**Box length:** 410 mm  
**Box width:** 245 mm  
**Tap only weight:** 0.95 kg

**Box depth:** 60 mm  
**Units per outer:** 10  
**Boxed weight:** 1.35 kg

## Product flow characteristics:

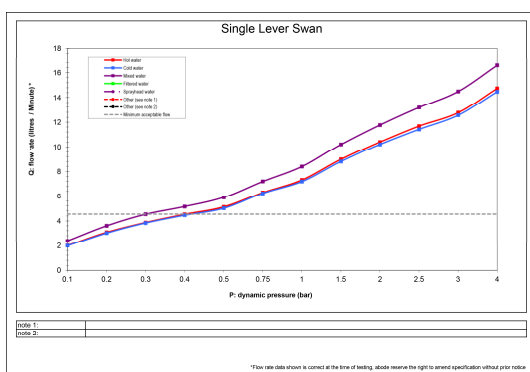

- **Min / Max water pressure:** 0.30 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 14.49

- **Control valve type:** 35mm Ø single lever ceramic cartridge
- **Flow characteristics:** Single Flow
- **Non return valve(s):** None

- **Aerator type:** Honeycomb
- **Spout connection method:** Grub Screw Rear of body

- **Tail pipe inlet / outlet size:** M10 / 1/2" BSP Female
- **Inlet pipe type / length:** Flexible stainless braided hose / 350 mm

## Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

## Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year