


Installation Instructions

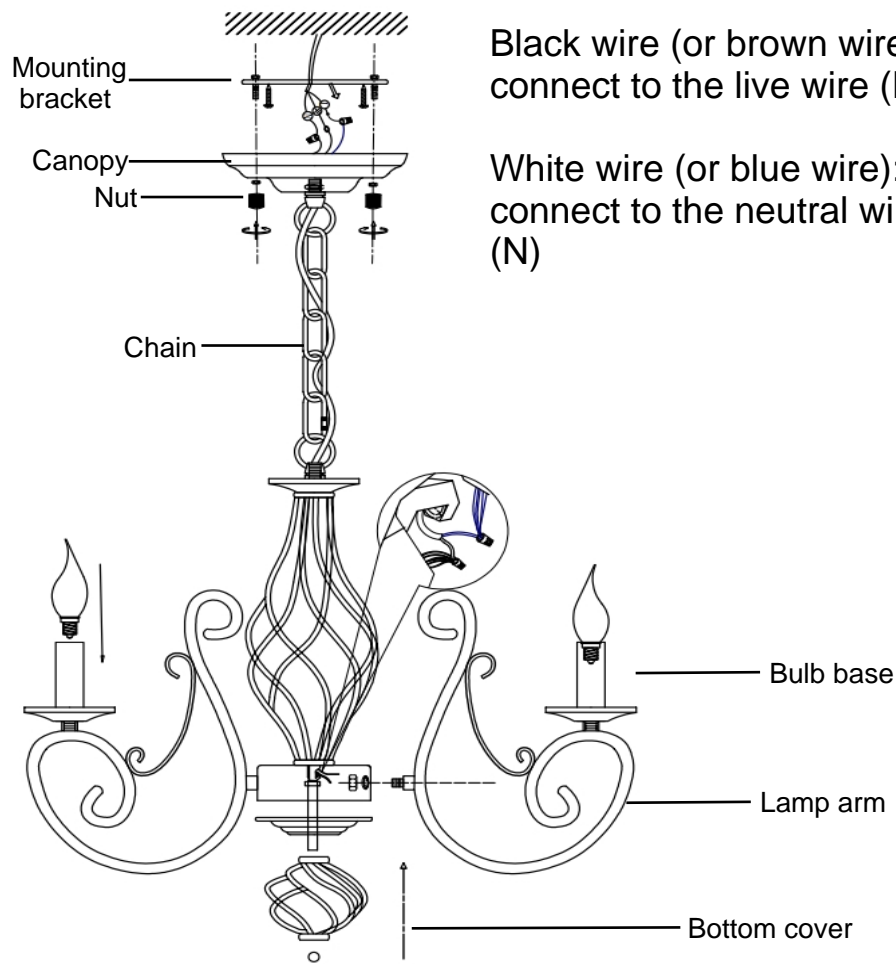

Black wire (or brown wire):
connect to the live wire (L)

White wire (or blue wire):
connect to the neutral wire
(N)

Connect all white wires to the main white wire and all black wires to the main black wire using wiring caps. Wrap the wire caps with electrical tape to prevent electric leakage.

Installation Steps:

Before installation: Open the packaging, locate all the accessories, and place them on a clean surface to prevent wear and damage to the lamp body.

- 1: Install the lamp arms into the holes and secure them with nuts.
- 2: Connect all white wires to the main white wire and all black wires to the main black wire using wiring caps. Wrap the wire caps with electrical tape to prevent electric leakage.
3. Attach the bottom cover and secure it tightly with the nut.
4. Install the chain and adjust its length as needed.
5. Secure the mounting bracket to the ceiling using plastic nails and self-tapping screws.
6. Attach the entire lamp to the mounting bracket. Connect the lamp wire to the power wire. White wire to neutral (N), black wire to live (L)
7. Align the canopy with the mounting bracket, secure with nuts.
8. Install the light bulbs.

Warning!

1. Installation should be performed by a professional.
2. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3. This light fixture operates within a 110V to 265V range only.
4. Do not install the light fixture in damp conditions.
5. Keep the light fixture away from acidic and corrosive materials.