


Assembly & Installation Instructions

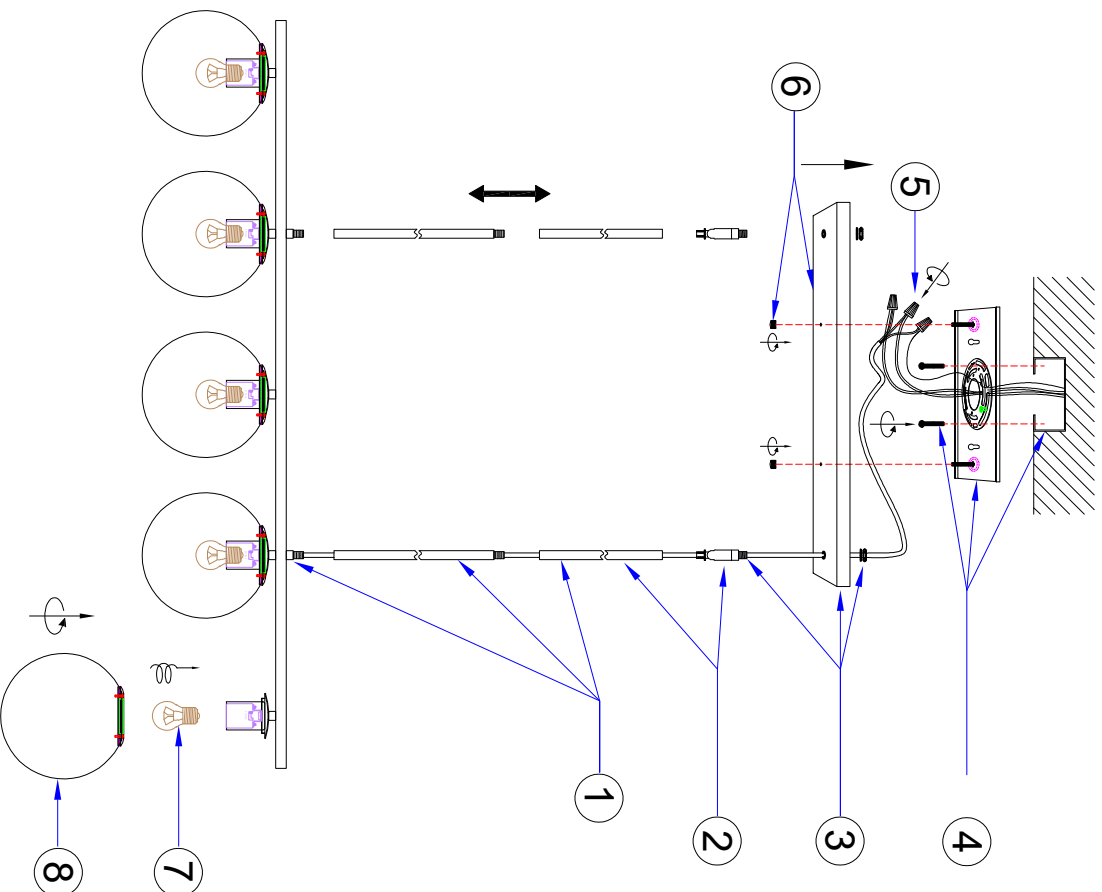

PREPARATION before INSTALLATION:

1. If an existing fixture is being replaced, remove it and note to which wire in the outlet box the original fixture was attached.
2. Before discarding the carton, double-check the packaging to make sure all parts have been found.
3. This fixture was designed to be mounted on an octagon outlet box. The box must be securely mounted to the structure of the building.

IMPORTANT:

1. **WARNING** - Disconnect power before relamping or wiring the fixture. Turn off the entire electrical circuit to which the lighting fixture is attached.
2. Installation and maintenance of this fixture should be completed by a licensed electrician.
3. Failure to install the fixture correctly could result in serious injury or death.
4. Read all instructions before starting installation.

INSTALLATION STEPS:

1. Pass the main wire through the downrod, then tighten the downrod securely onto the fixture. (The downrod length can be adjusted to the desired length.)
2. Thread the main wire through the sloped ceiling light adapter, then tighten the sloped ceiling light adapter securely onto the downrod.
3. Pass the main wire through the hole in the ceiling canopy. Then pass the sloped ceiling light adapter through the same hole, and secure the ceiling canopy to the sloped ceiling light adapter using the provided nut and washer.
4. Secure the mounting bracket to the junction box with the mounting screws.
5. Connect the wires by using the wire caps as follows:
Connect the fixture's LIVE wire to the home LIVE wire.
Connect the fixture's NEUTRAL wire to the home NEUTRAL wire.
Connect the fixture's ground wire to the home ground wire.

Secure the fixture's ground wire to the mounting bracket with the green grounding screw. Then, tuck all wires into the junction box.

Note: make sure no bare wires are exposed to prevent electric leakage.

6. Secure the ceiling canopy to the mounting bracket with the knurled nuts.
7. Install the bulbs (not included) into the lamp holders.
8. Install the glass shades onto the lamp holders, align the threads carefully and tighten gently without overtightening.
9. Restore power and test the fixture.