

INSTALLATION INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Position mounting plate (A) so tabs are on the sides and leveled. Attach mounting plate (A) to junction box (Not included) with junction box screws (B). Make sure the side of mounting plate (A) marked "GND" must face out.
4. Thread bottom stem (M) into bottom of fixture body (O). Place shade (E) over socket on fixture body (O) and secure with socket ring (F). DO NOT over tighten socket ring (F).

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2. Making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to the mounting plate (A) using green screw provided.
6. Tuck wire connections neatly inside the junction box.

FINISHING THE INSTALLATION (Fig.1)

7. Attach backplate (D) to mounting plate (A) and secure with mounting screws (C).
8. Install (1) one candelabra base bulb up to 60 watts each or CFL or LED equivalent (Not included), in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

- Mounting Plate
- Ground Screw
- Junction Box Screw x2

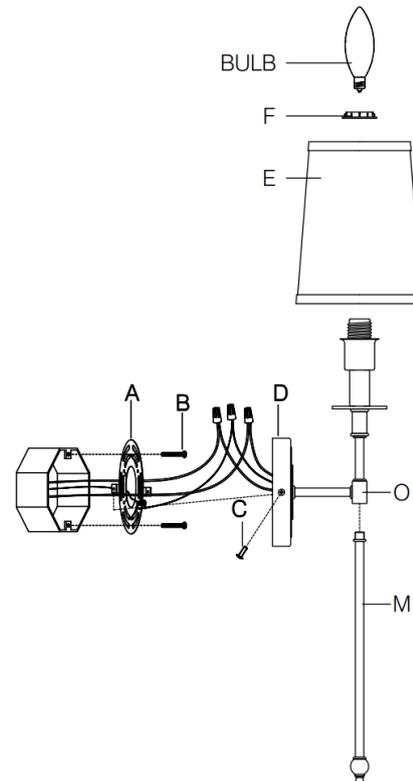


Fig. 2

