


Features

- Acrylic
- Drop-in or three-wall alcove
- 5 individually adjustable ProFlex® hydro-massage jets
- Pump with air switch and grounding-type plug-in cord
- In-line heater
- UL listed
- Optional K-9695 metal finish 5 jet trim kit
- Optional K-1278 removable apron
- 60" (1524 mm) x 36" (914 mm) x 20" (508 mm)

BATH WHIRLPOOL WITH HEATER K-1239-H ALSO K-1239-LH, K-1239-RH

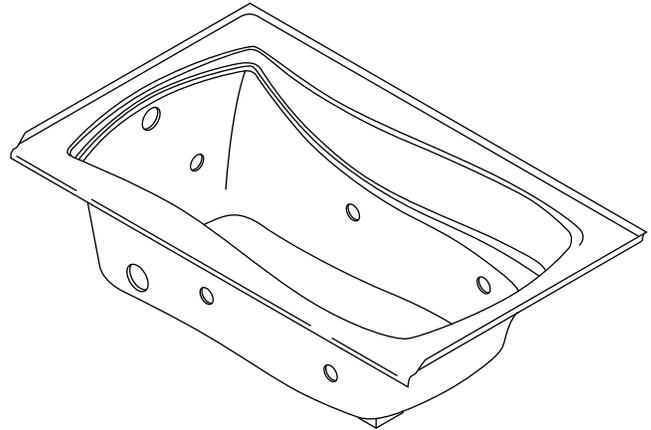

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7
- UL 1795
- CSA B45.5/IAPMO Z124

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1239-H	Bath whirlpool with heater – drop-in	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1239-LH	Bath whirlpool with heater – three-wall alcove, left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1239-RH	Bath whirlpool with heater – three-wall alcove, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories

K-7161-AF	Adjustable pop-up drain with tailpiece	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other _____
-----------	--	-----------------------------	-----------------------------	--------------------------------------

Optional Accessories

K-1278	Removable apron	<input type="checkbox"/> 0		<input type="checkbox"/> Other _____
K-9695	Metal finish 5 jet trim kit		<input type="checkbox"/> CP <input type="checkbox"/> PB	<input type="checkbox"/> Other _____

Product Specification

The acrylic bath whirlpool shall be 60" (1524 mm) in length, 36" (914 mm) in width, and 20" (508 mm) in height. Product shall be for drop-in installation [K-1239-H] or three-wall alcove installation [K-1239-LH, K-1239-RH]. Product shall include 5 individually adjustable ProFlex hydro-massage jets, a pump with air switch and grounding-type plug-in cord, and an in-line heater. Product shall be UL listed. Product shall be available with an optional K-1278 removable apron and an optional K-9695 metal finish 5 jet trim kit. Bath whirlpool shall be Kohler Model K-1239-_____-_____.

MARIPOSA®

Technical Information

Fixture*:	
Basin area:	
Bathing area, bottom	46" (1168 mm) x 24" (610 mm)
Bathing area, top	54" (1372 mm) x 27" (686 mm)
Weight	110 lbs (49.9 kg)
To overflow:	
Water depth	14" (356 mm)
Capacity	63 gal (238.5 L)
* Approximate measurements for comparison only.	

Drop-in cutout:	58" (1473 mm) x 34" (864 mm)
-----------------	------------------------------

Pump	V	Hz	A
1-speed	120	60	7.5
Heater:	Kw	V	Hz
	1.5	120	60
			12.5

Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):	
Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz
Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.	


Installation Notes

Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 44 lbs/square foot (215 kg/square meter) loading.

If installing a rim-mount faucet, make sure there is no interference with the drain overflow before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

The apron must be installed before the finished floor and wall materials are installed.

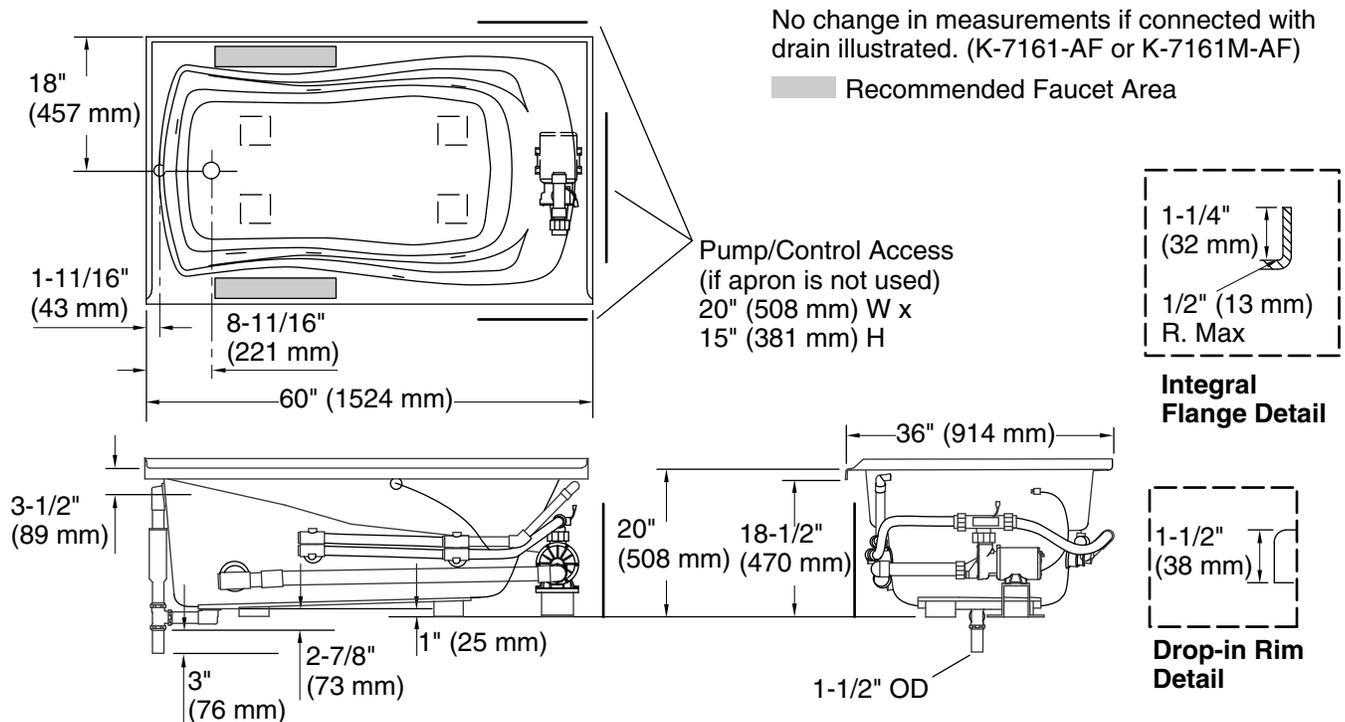

Product Diagram