




Product Installation Instructions

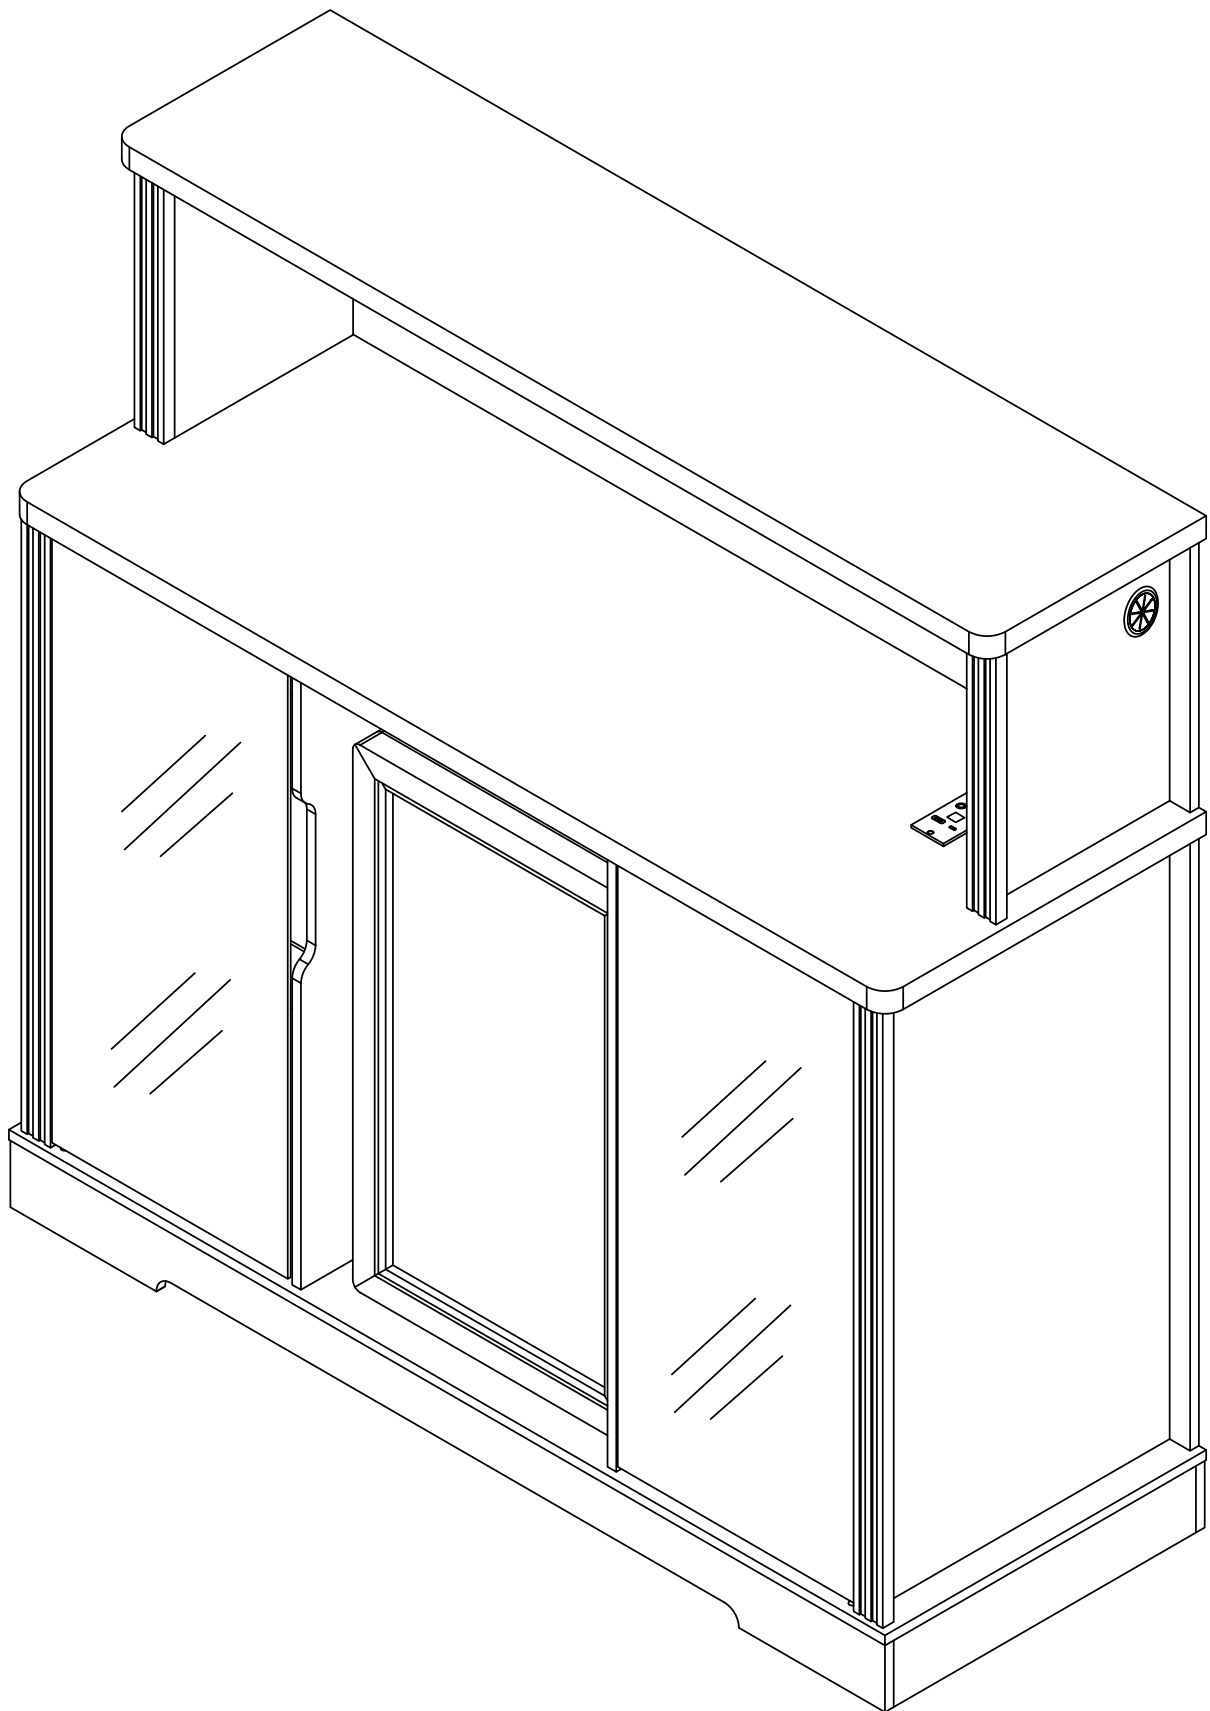


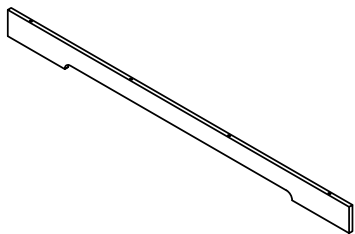


Ax1

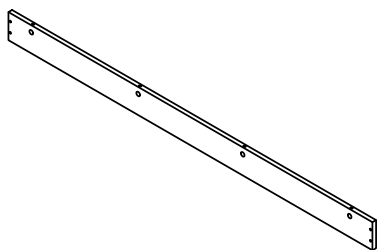


Bx1




Cx2

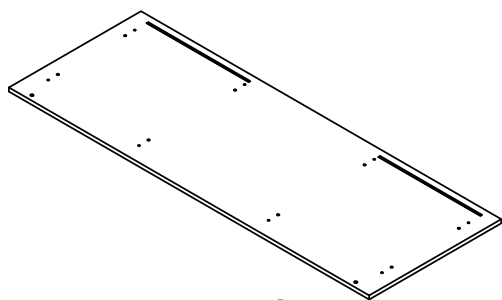


Dx1



Ex1



Fx1



Gx1



Hx2




I x2




Jx2




Kx1

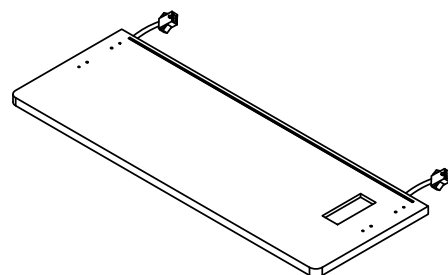


Lx1



1




Mx1




Nx1




Ox2




Px2

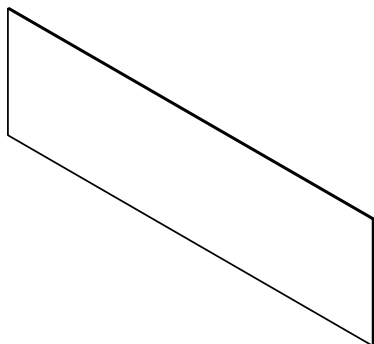

Qx1

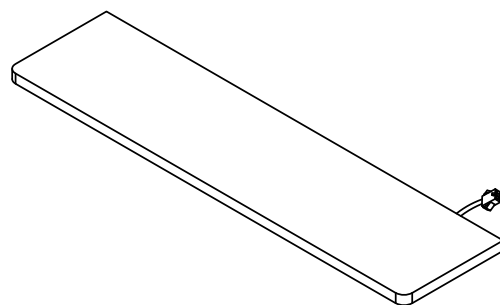


Rx1




Sx2



Tx2



Ux1















Vx2




Wx1

Accessories list


①		Two In One Screw (6x28mm)	66pcs +6pcs
②		Two In One Nut (10x12mm)	66pcs +6pcs
③		Wood Chipping (6x30mm)	20pcs +4pcs
④		Wire cover	1pcs
⑤		Screw (3.5x25mm)	14pcs +2pcs
⑥		Rebound device & Screw (3x16mm)	8pcs +2pcs
		Iron sheet	2pcs
		Hinge	4pcs 2pcs 2pcs
⑦		Non-slip pads (50x10x2mm)	10pcs +2pcs
⑧		Laminate support nail	12pcs +2pcs
⑨		Fixing clip & screw (3x16mm)	24pcs +4pcs
⑩		Wine glass rack & Screw (4x16mm)	8pcs +2pcs
⑪		Power strip screw (3x10mm)	2pcs +1pcs
⑫		Double end connecting line	1pcs
⑬		Wire Clamp	3pcs +1pcs
⑭	Anti tipping hardware  x2  (3.5x12mm) x2  x4  (4x45mm) x2  x2		
 1pcs  Double-head screwdriver, use as required			

Product structure decomposition

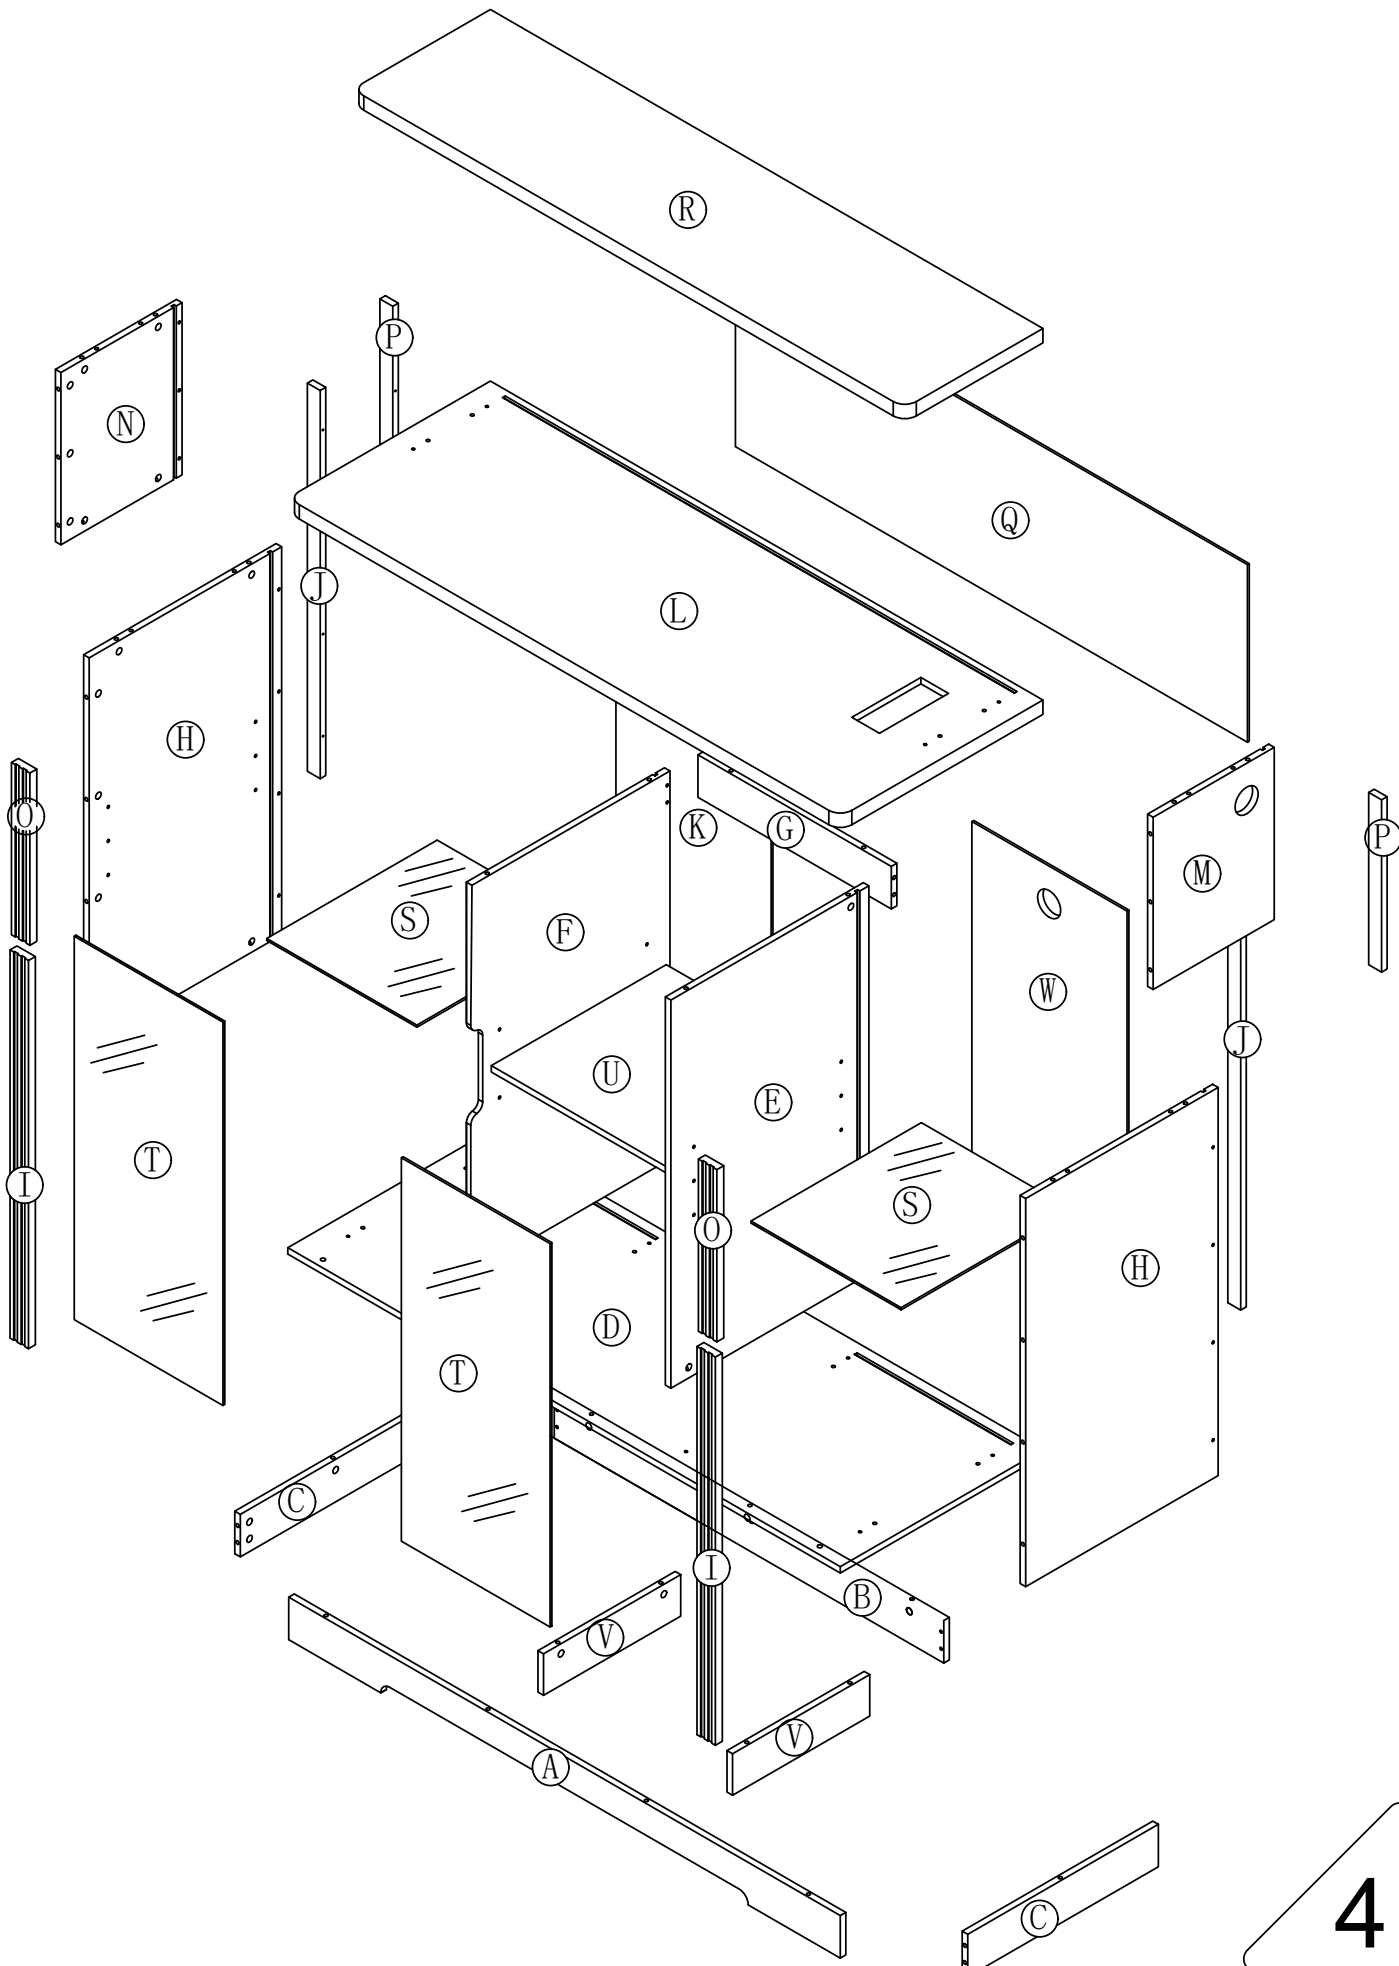


Use parts ① and ②




Step1

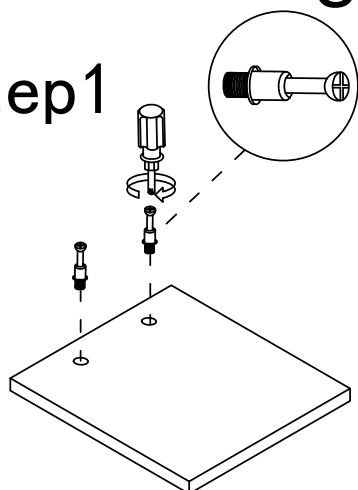

Step2

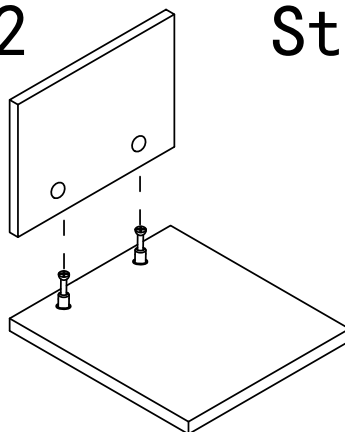



Step3

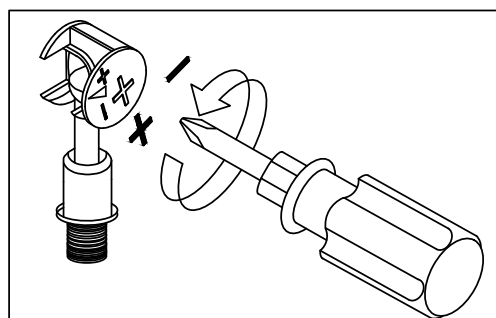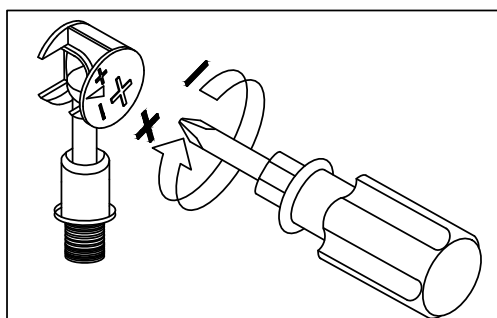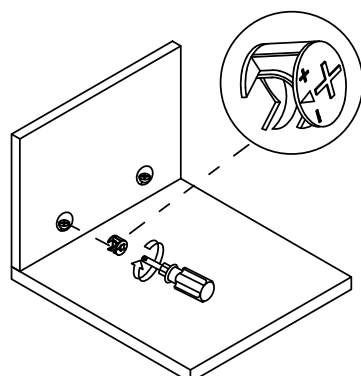



Use a screwdriver to lock in the direction of the "+" sign

Disassemble along the direction of "-" sign



Step 1

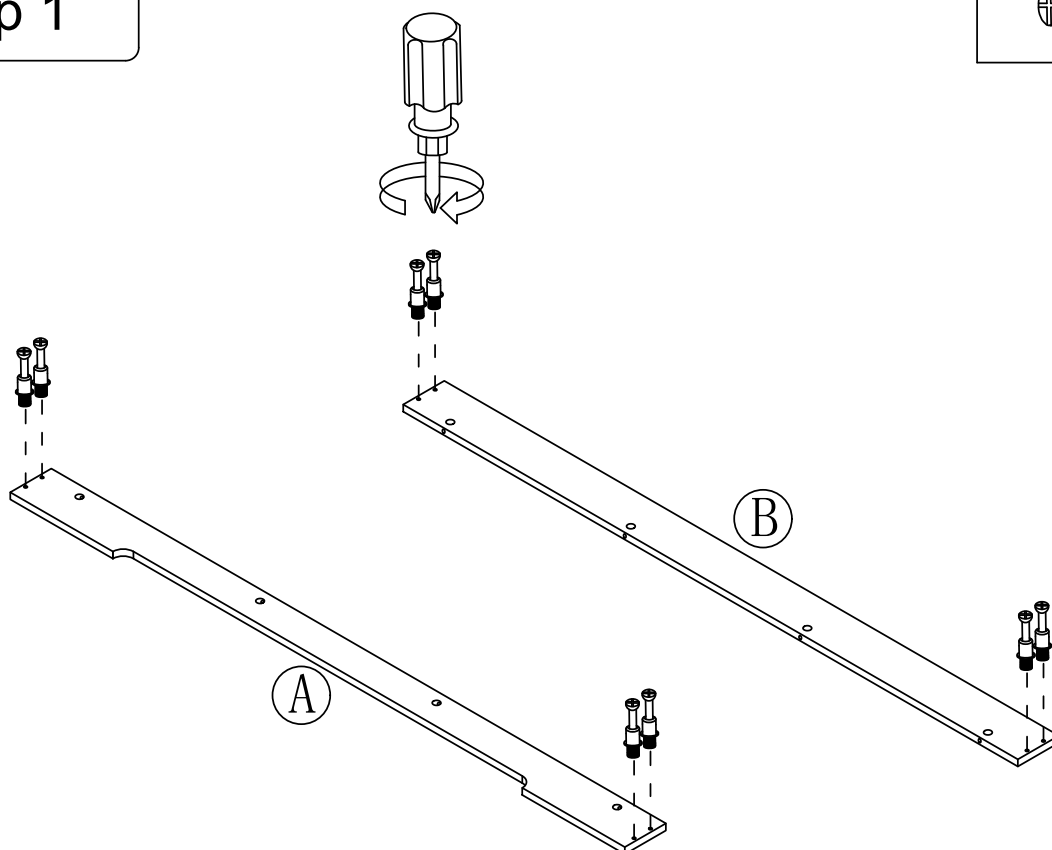

Step 2

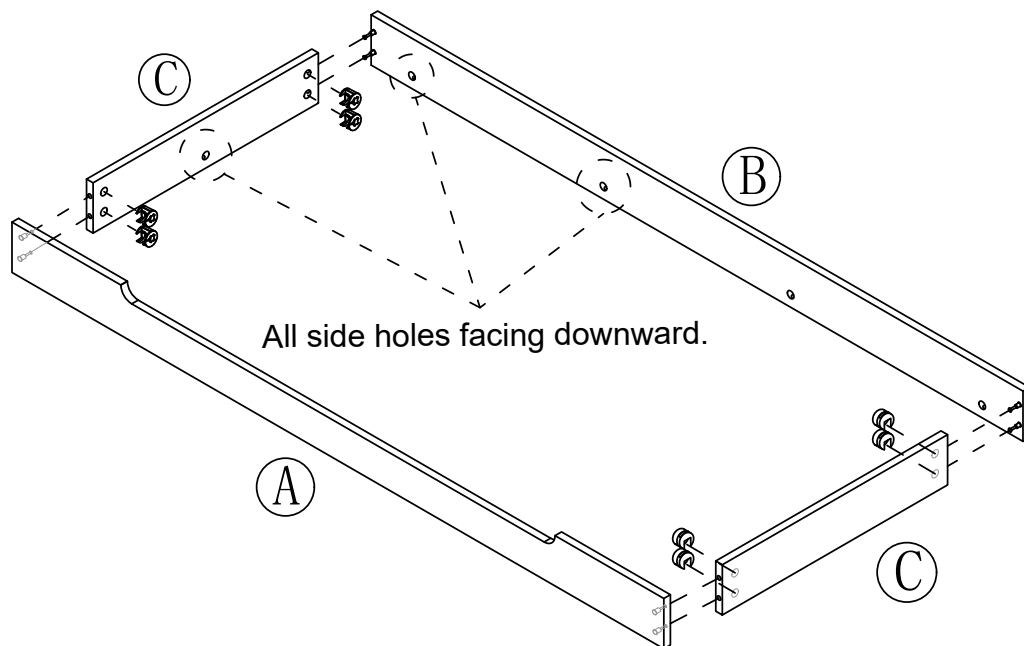

Step 3

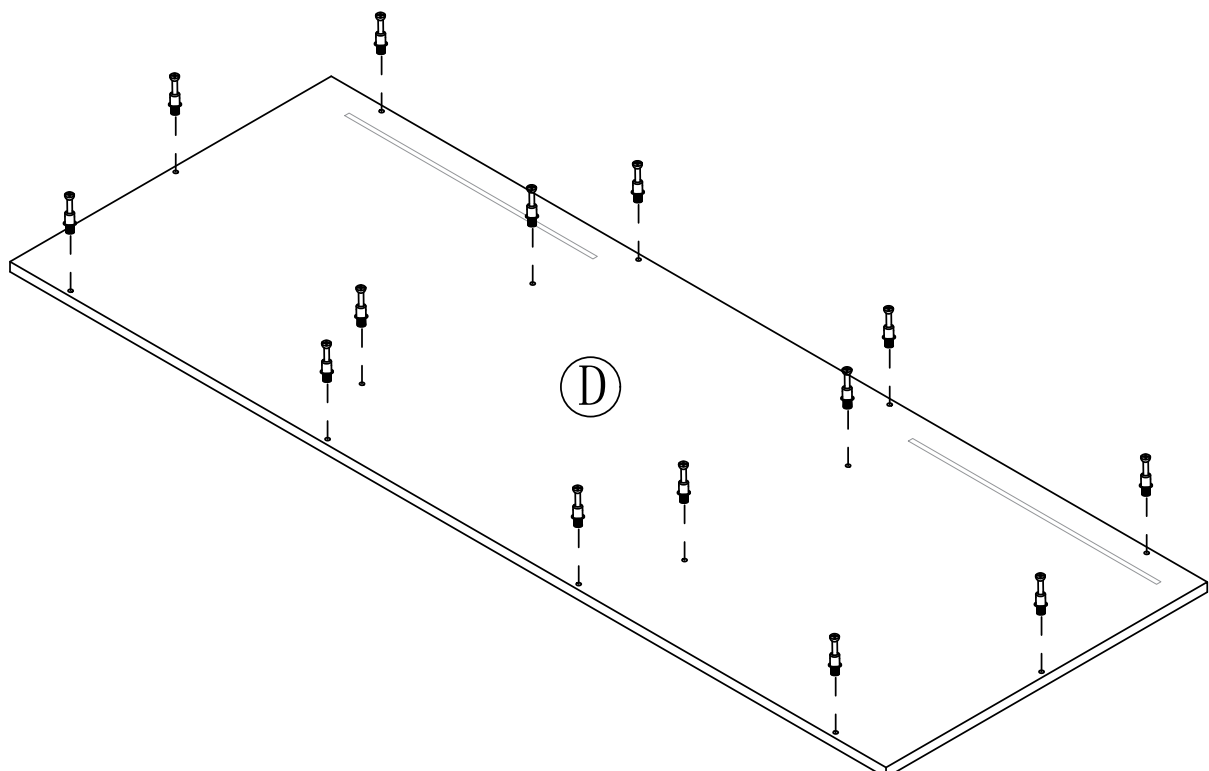


Step4

2



x10

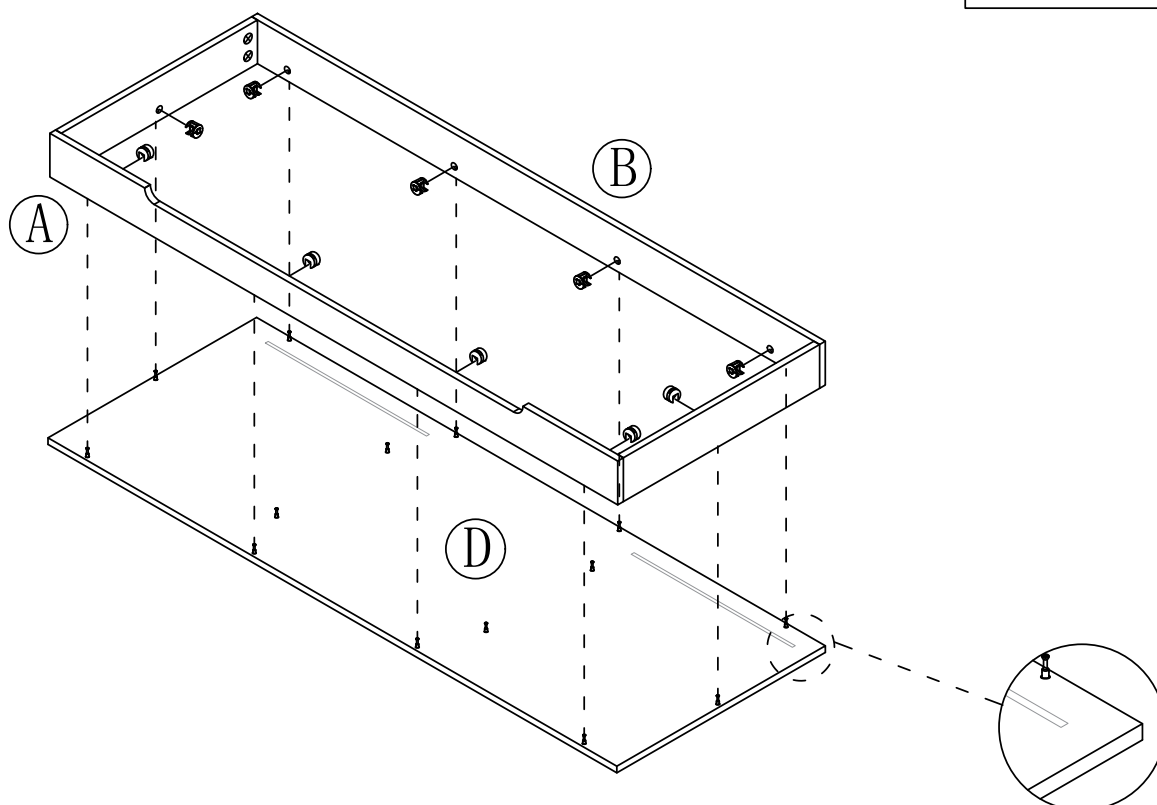


Pay attention to the position of the back slot.

2




x4

Step 5

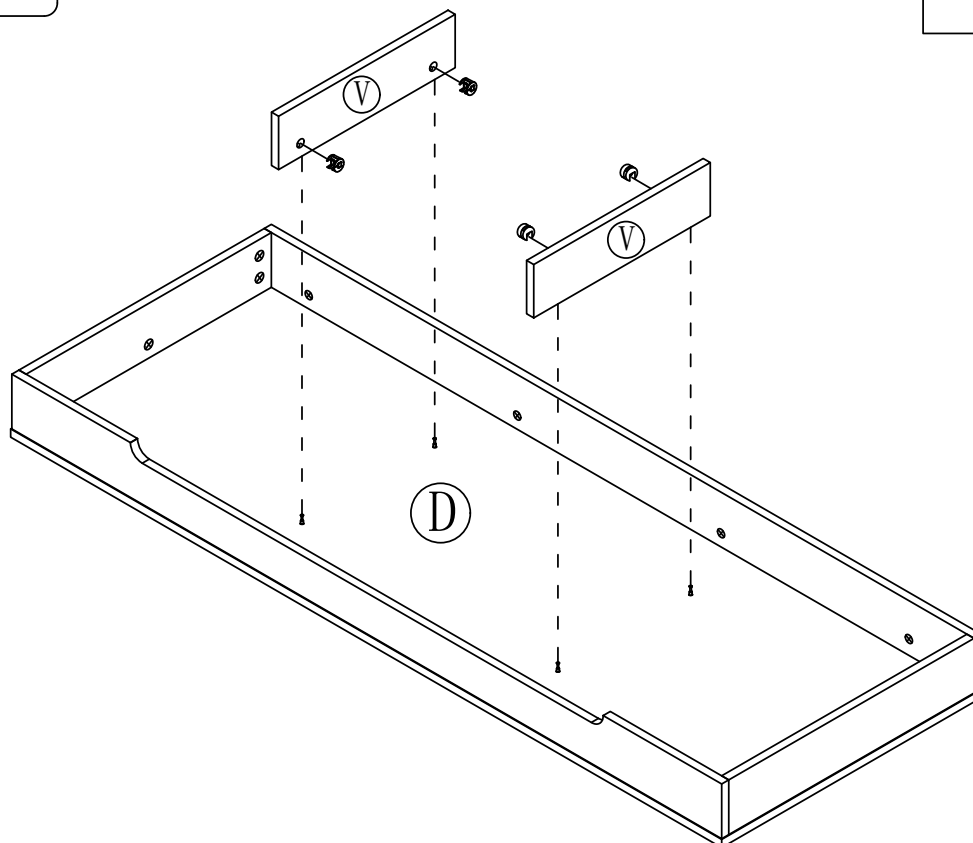


Step6

7




x10

Tear off release paper and stick the black foot pad on the board

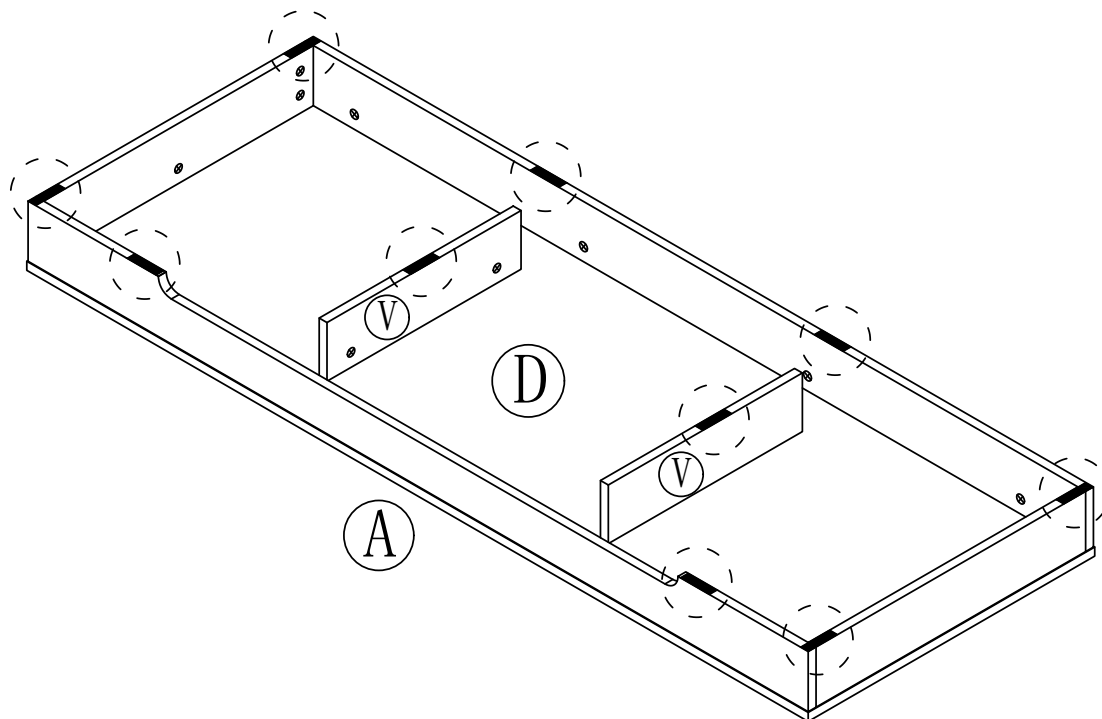


Step 7

1




x8

3





x8

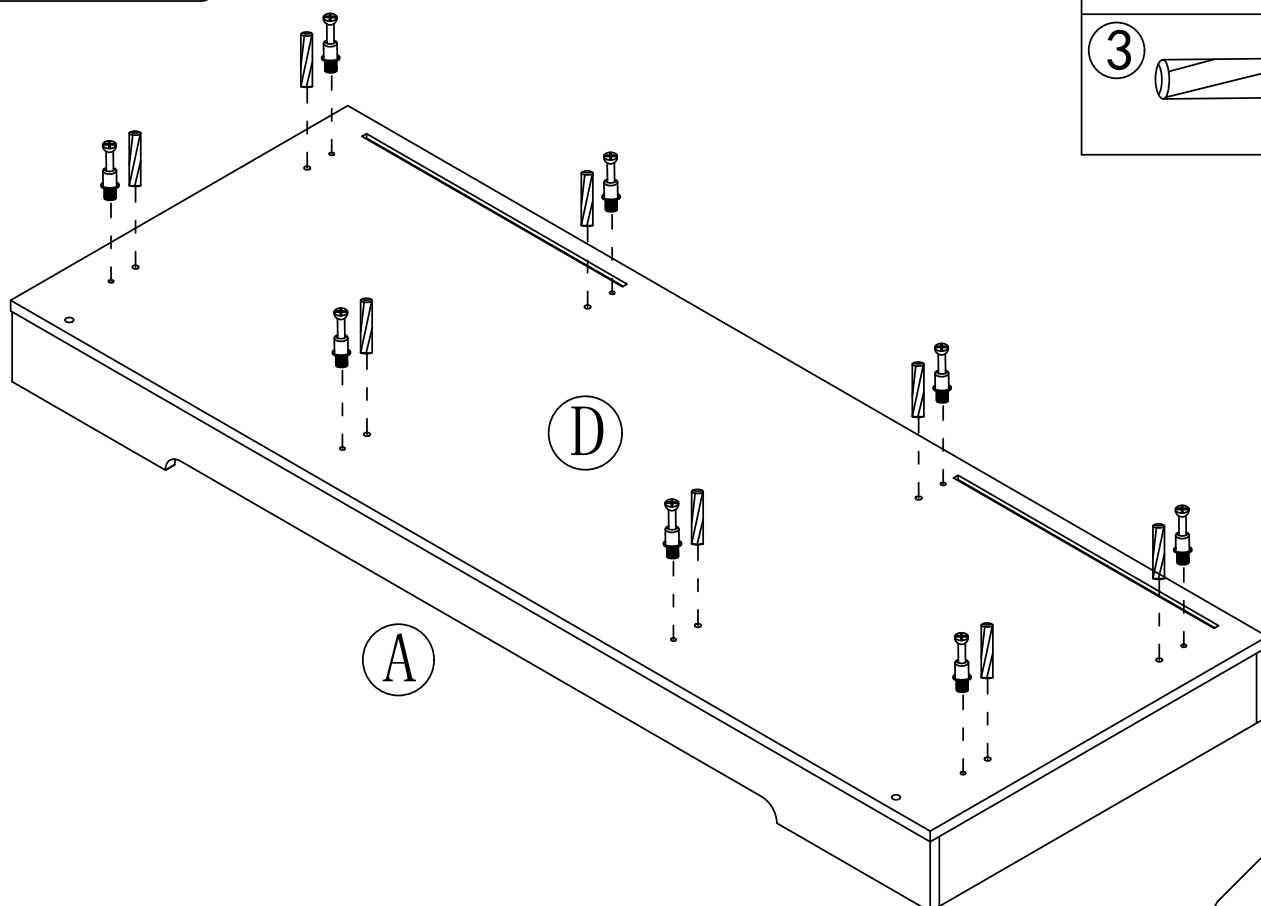

8



Step8

1

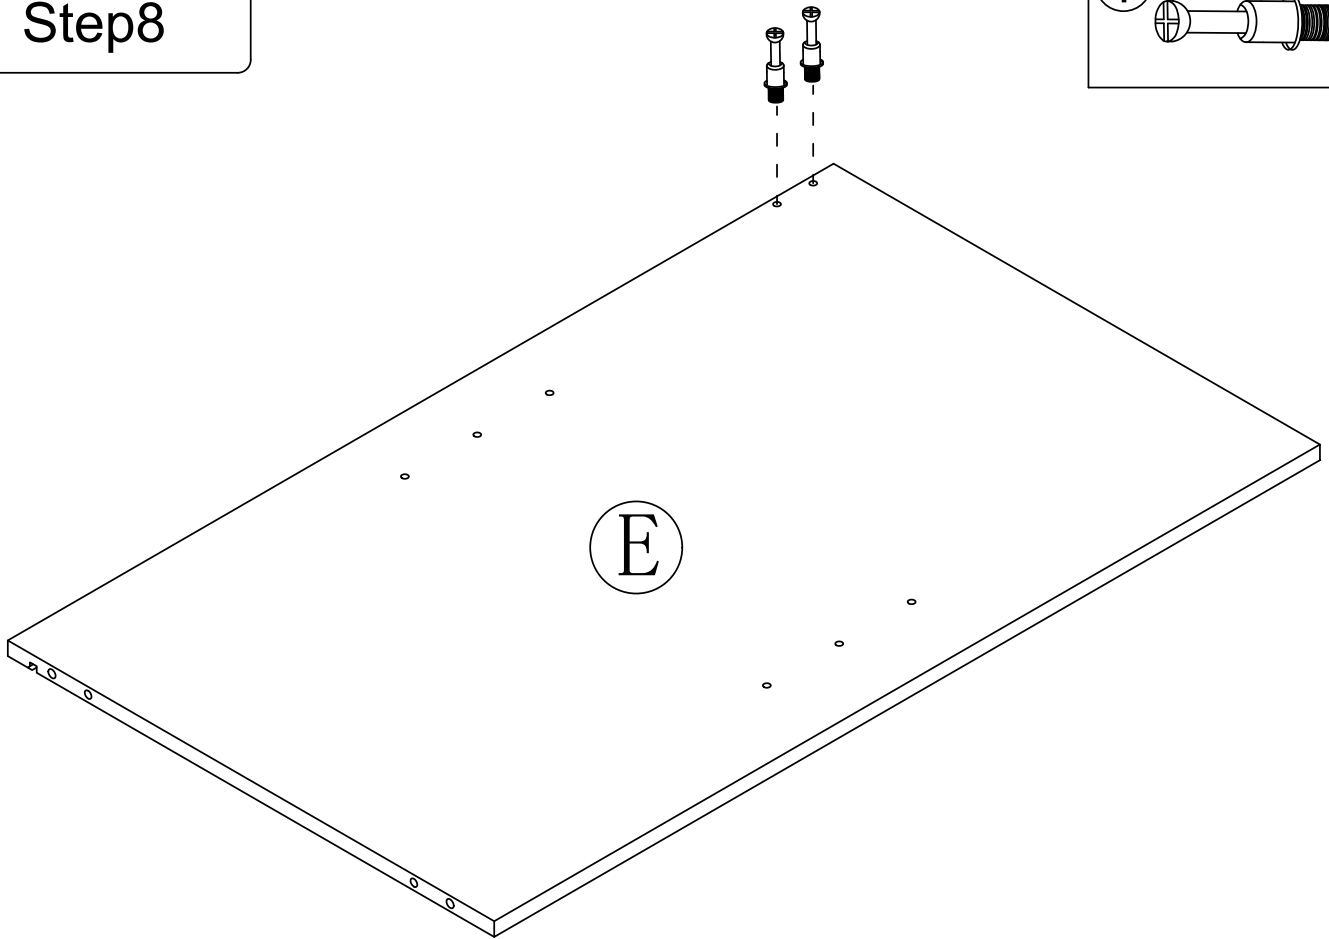

Step 9

1

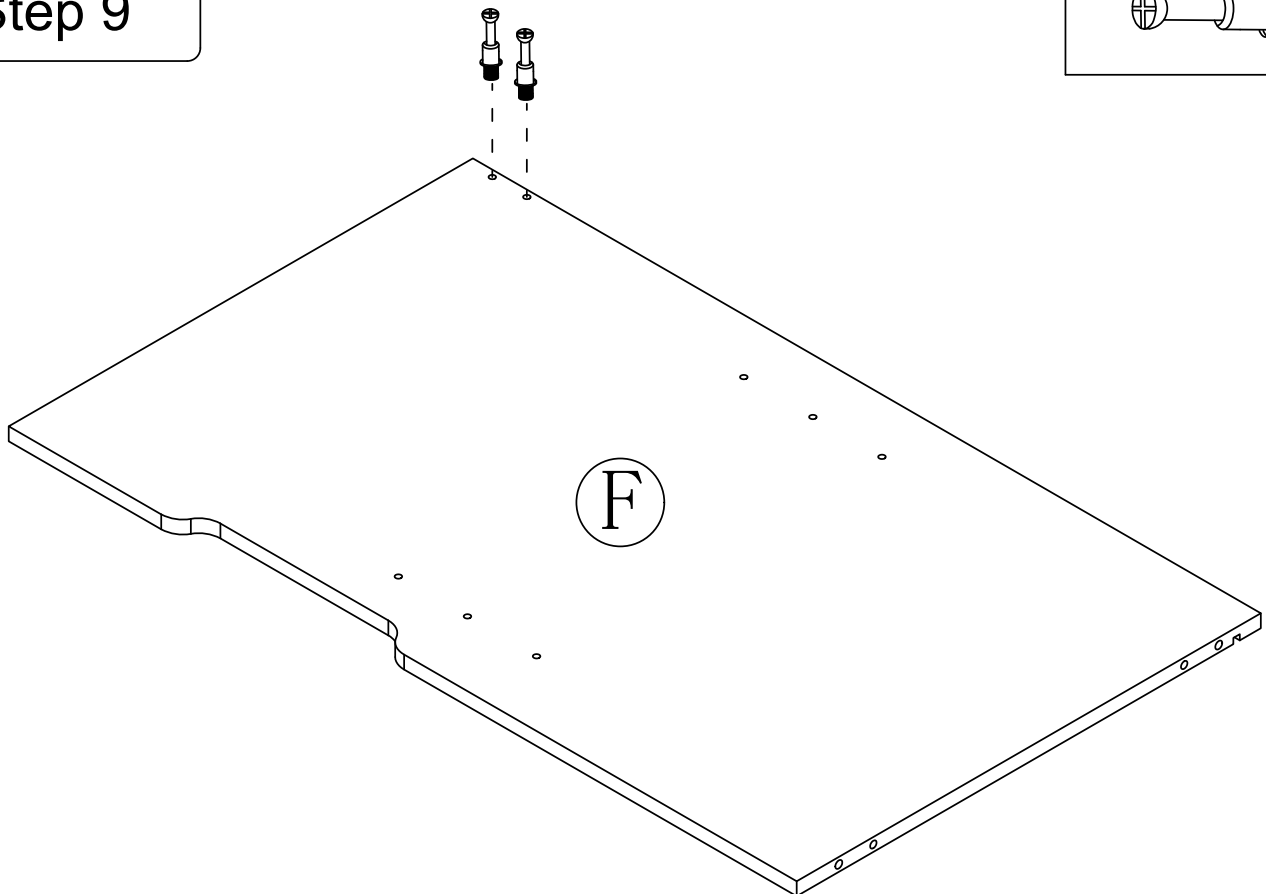


Step10

2



x2

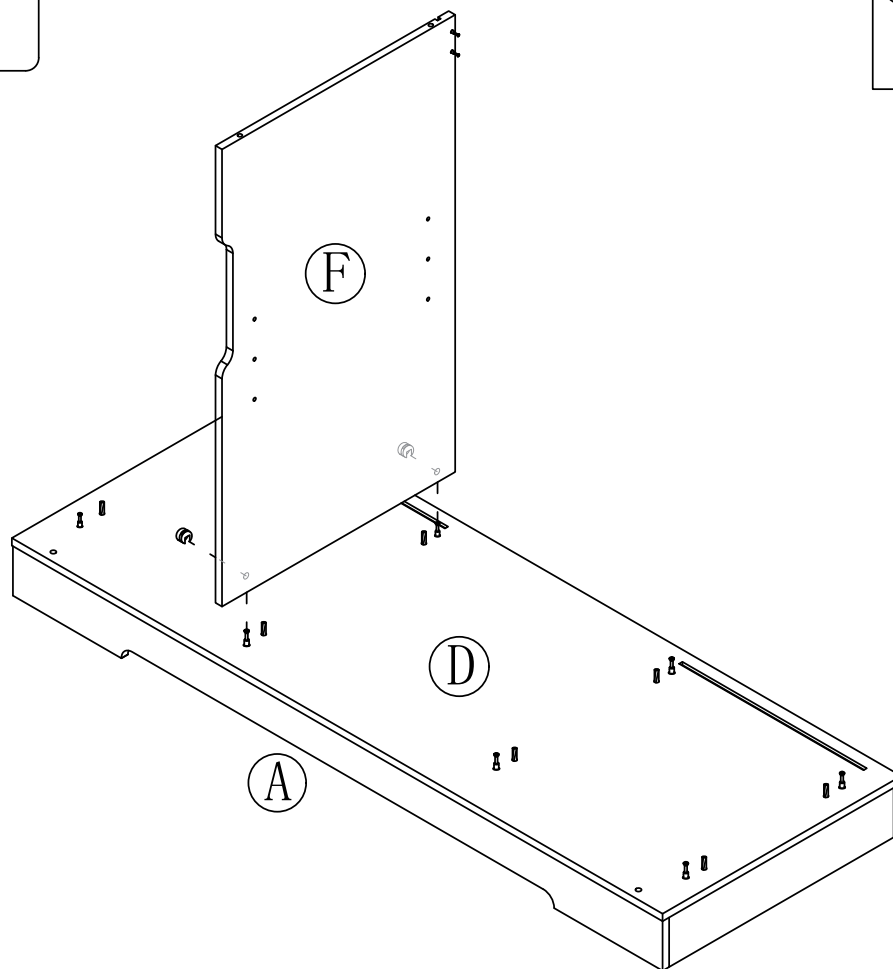


Step 11

2



x2


Pay attention to the position of the hole

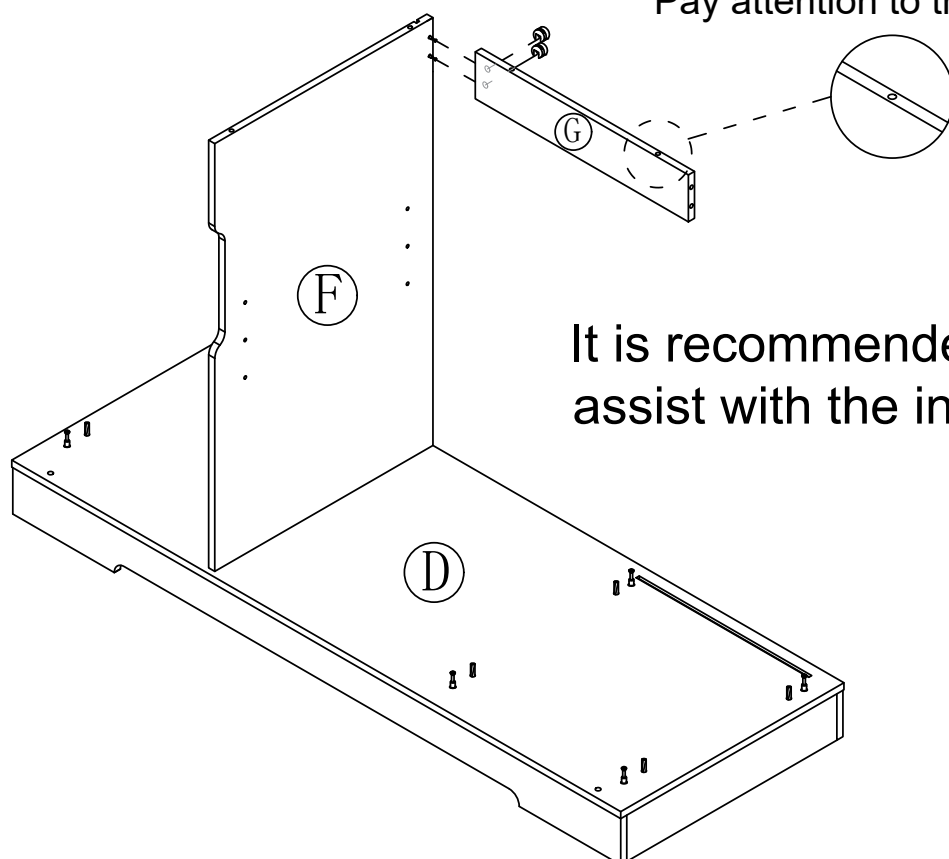

It is recommended to have two people assist with the installation.

Step12

Insert Panel E into Panel D, but do not tighten it to facilitate subsequent installation.

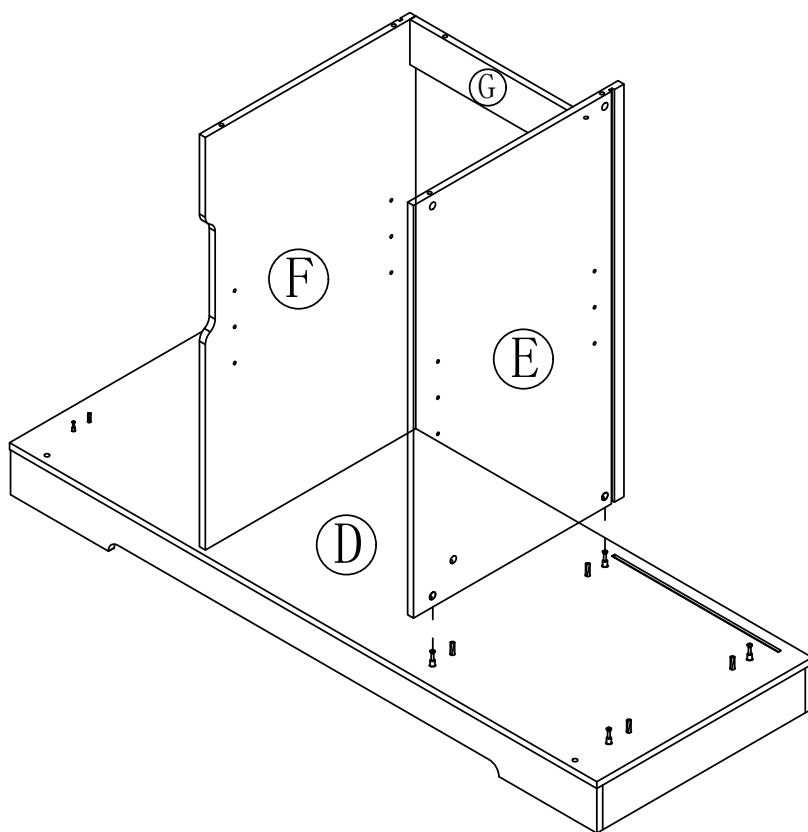


Step 13

1. Bend the E plate a little outward to facilitate the installation of the G plate

②



x2

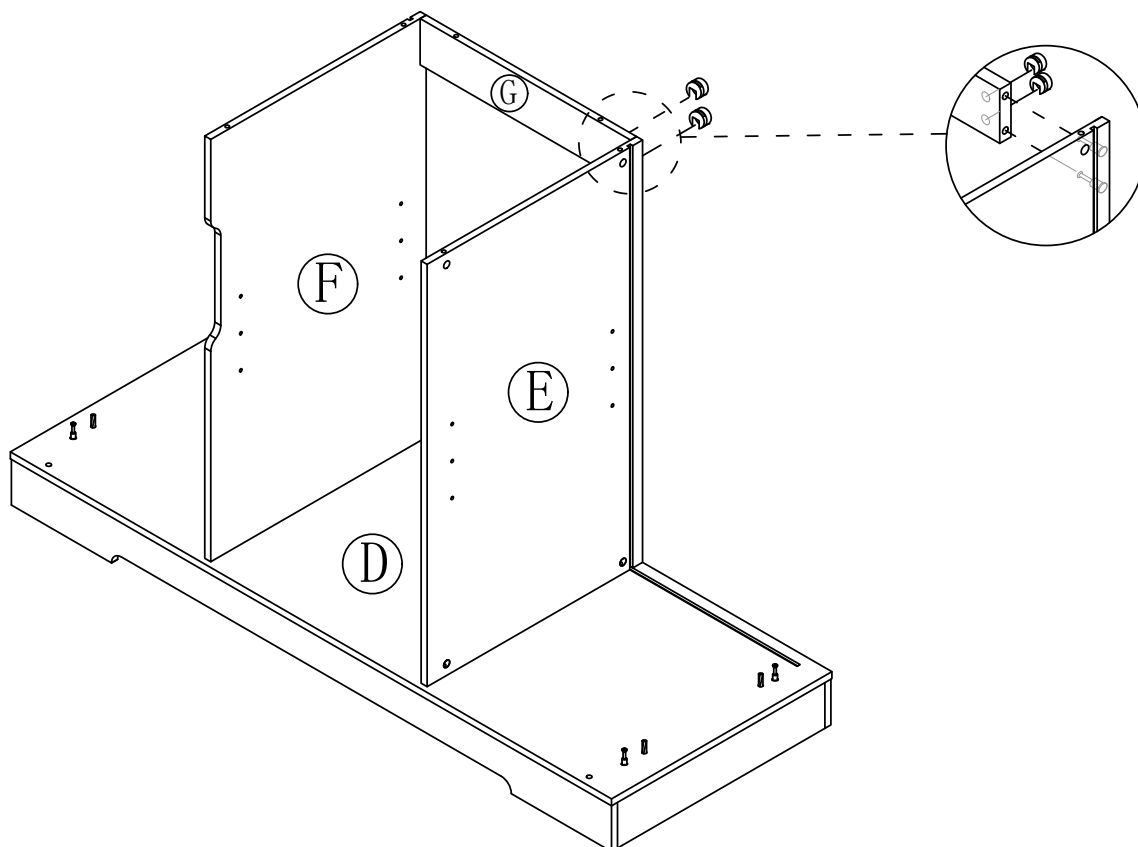


Step 14

②




x2

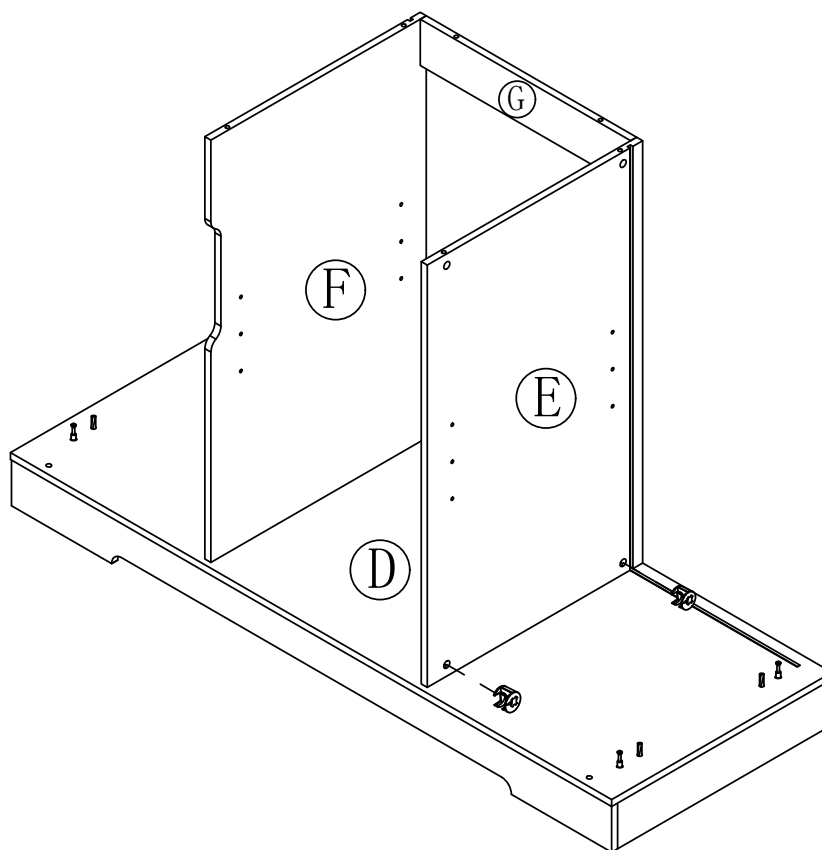


Step 15

①



x8

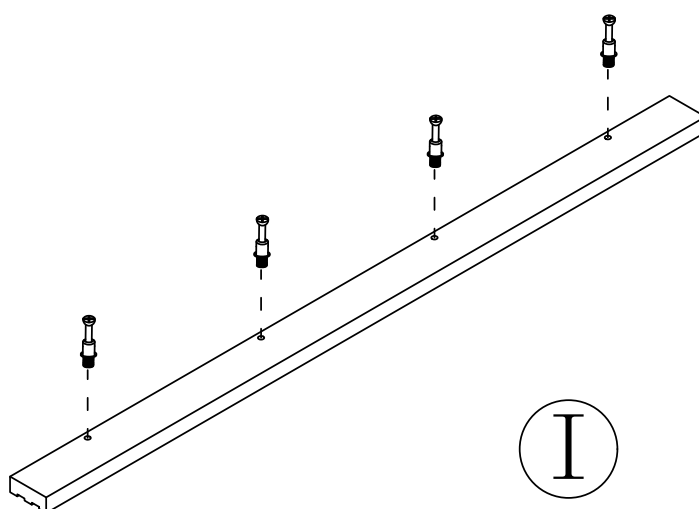


x2

Step 16

②




x8

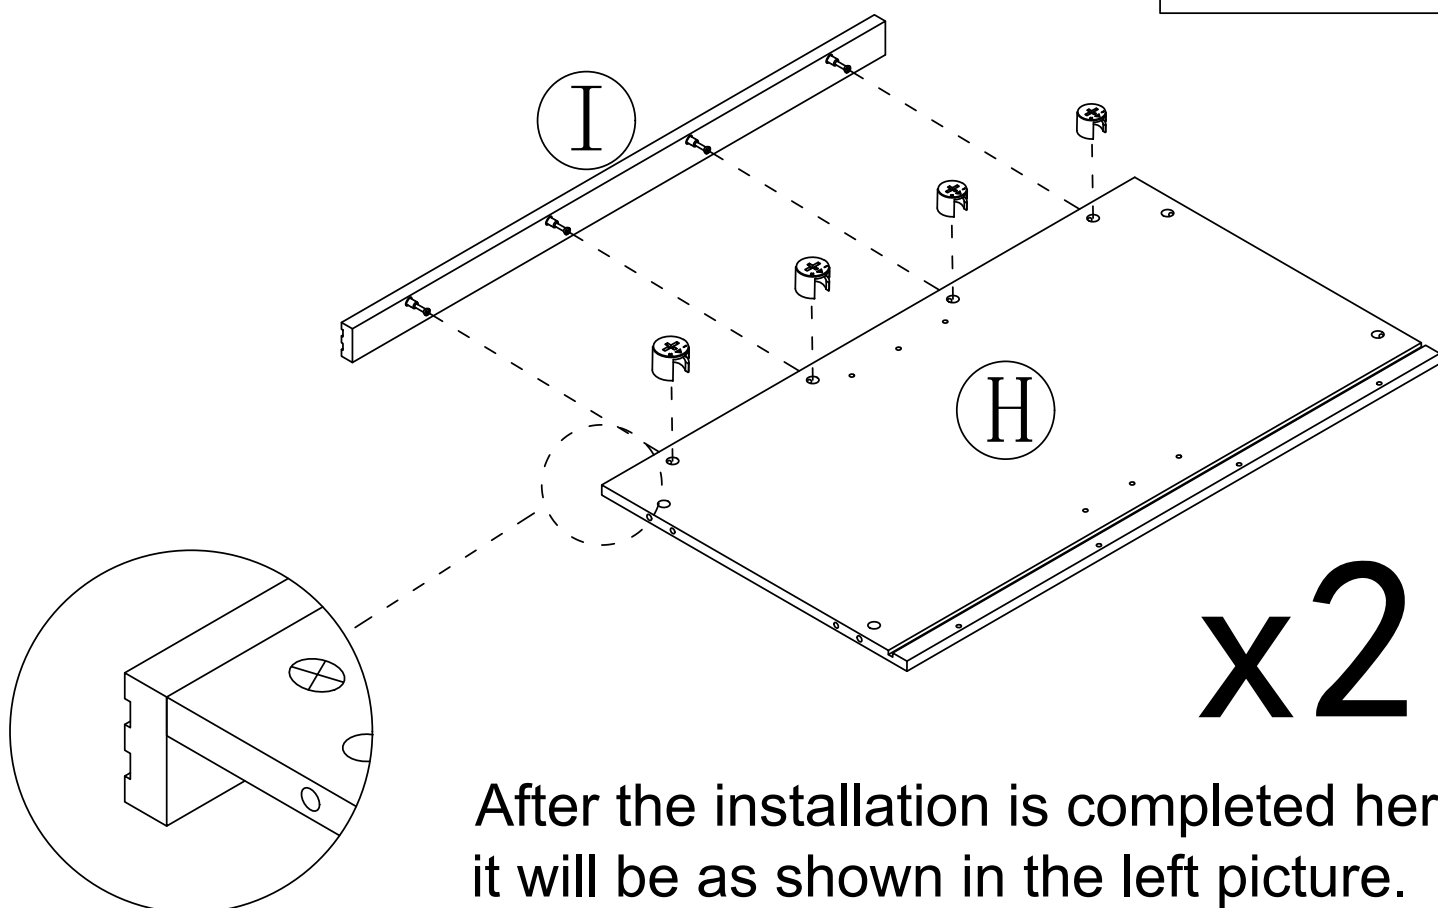


After the installation is completed here, it will be as shown in the left picture.

Step 17

⑤



x8

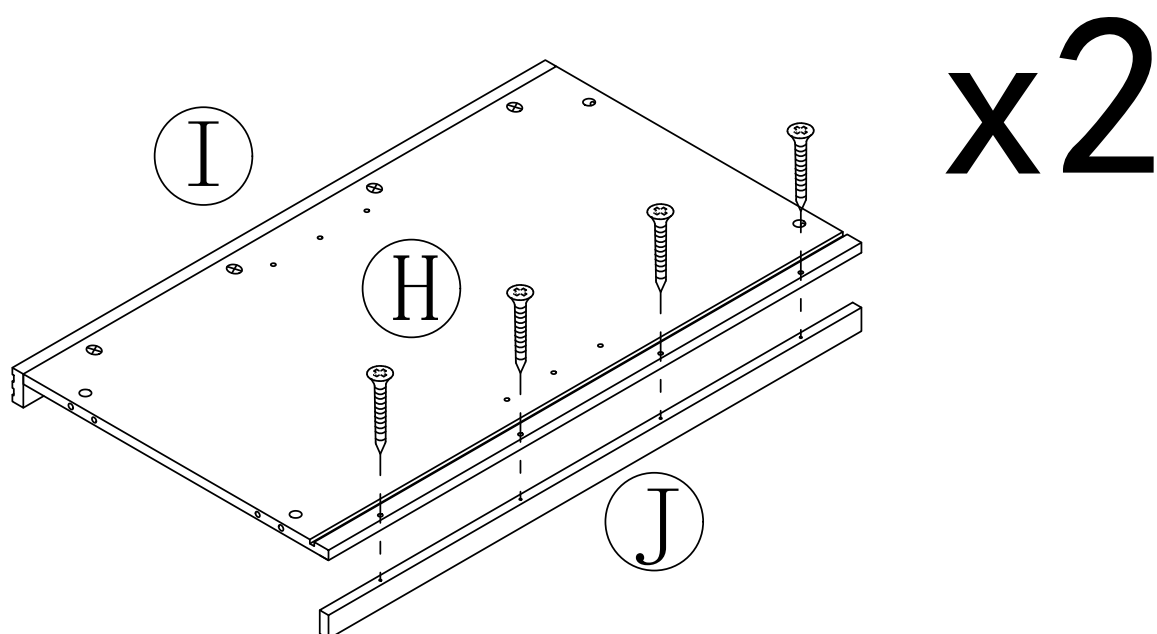


Step 18

2




x4

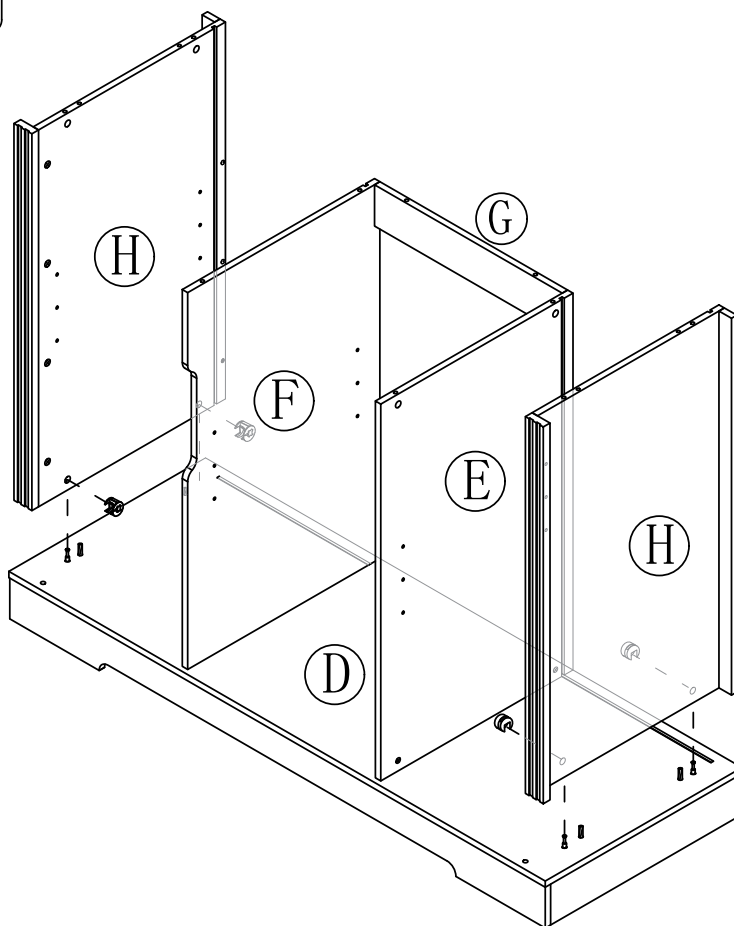


Step 19


3





x4

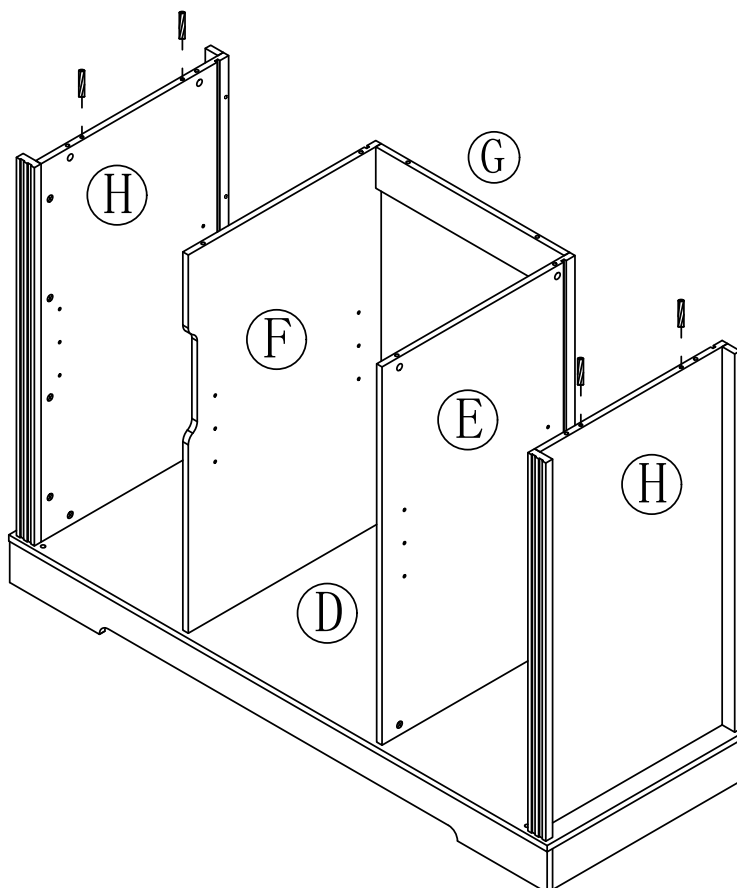



Step 20

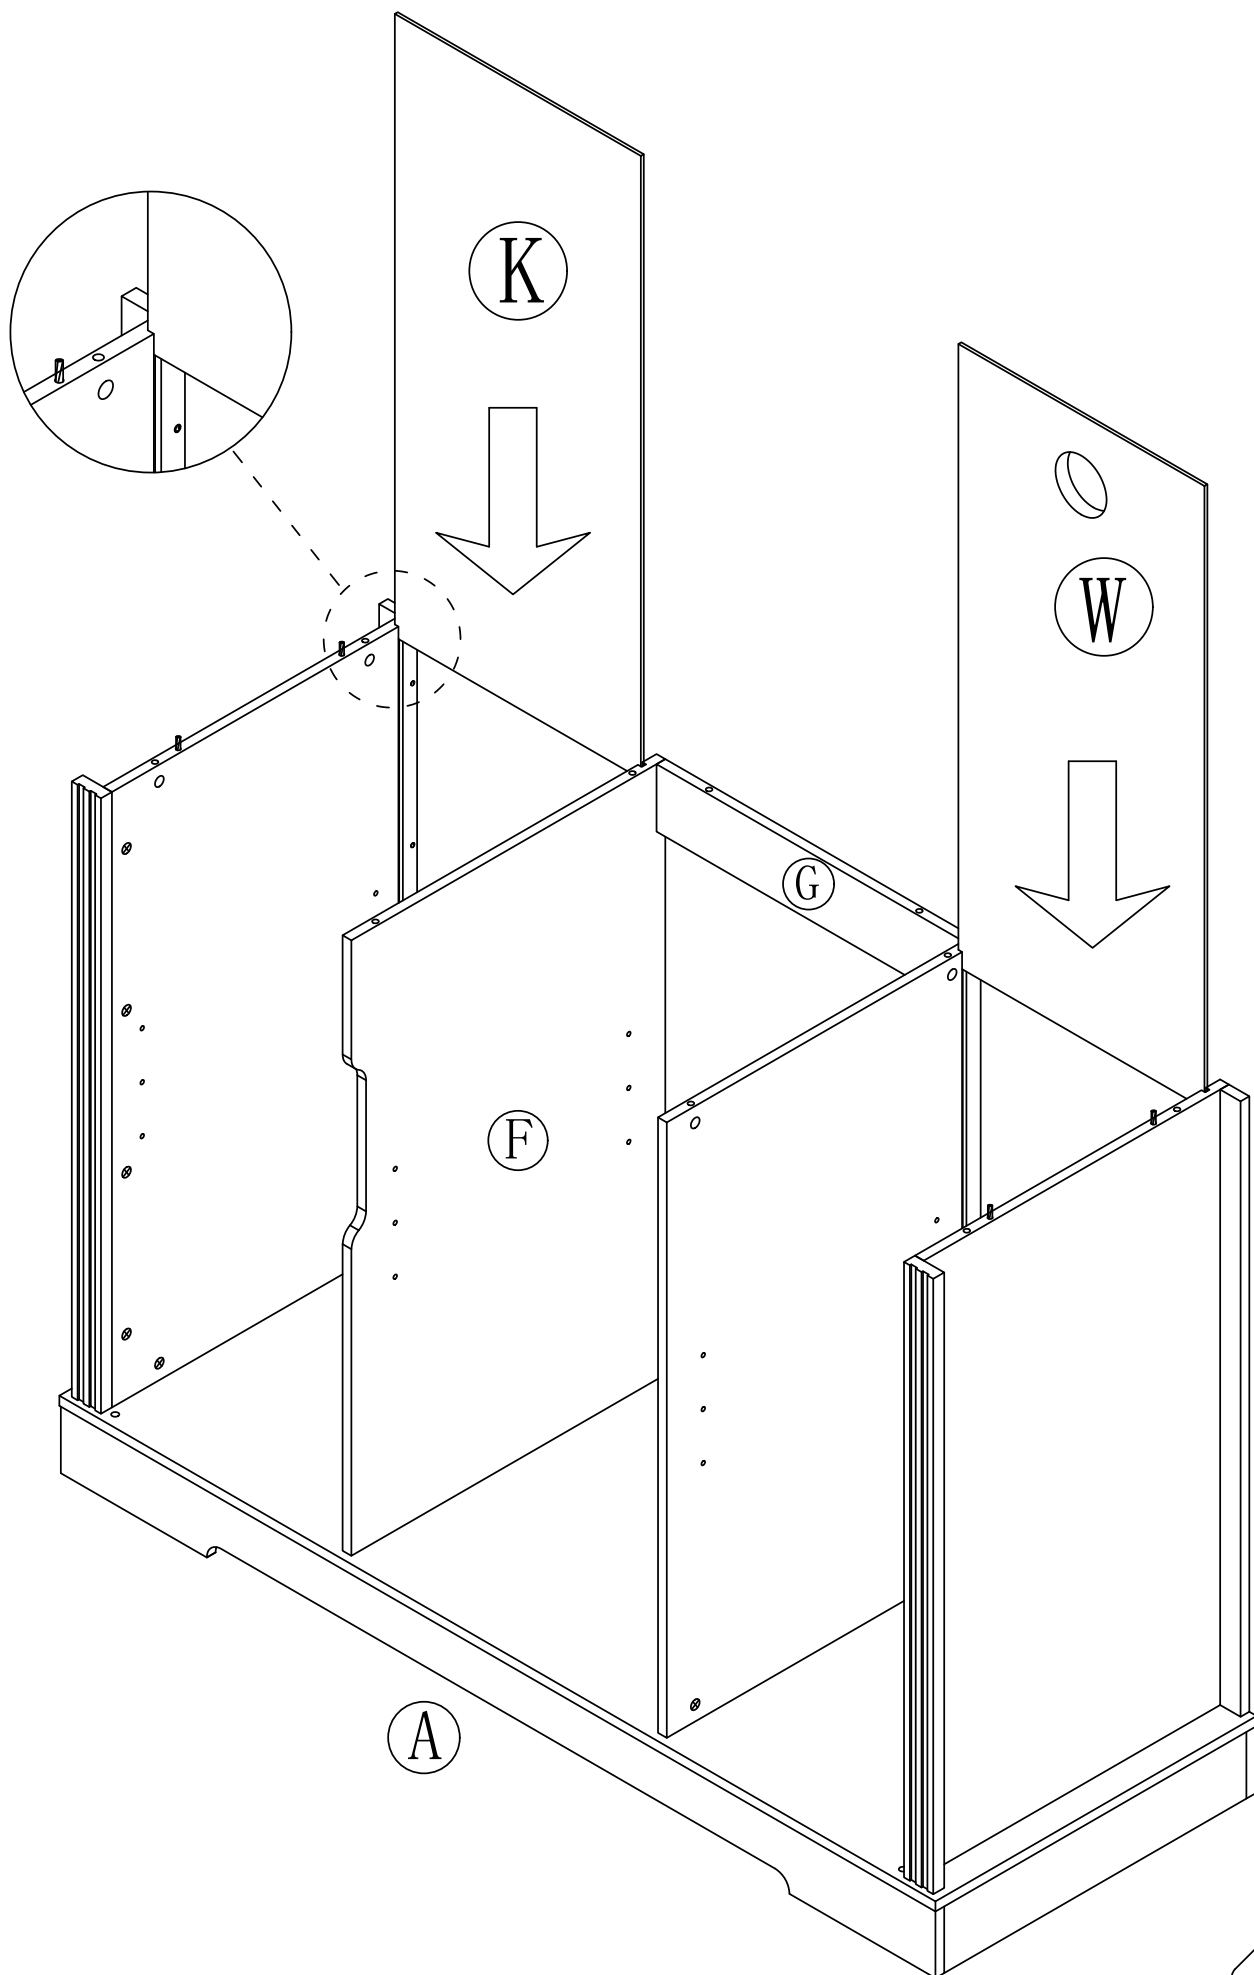

Step 21

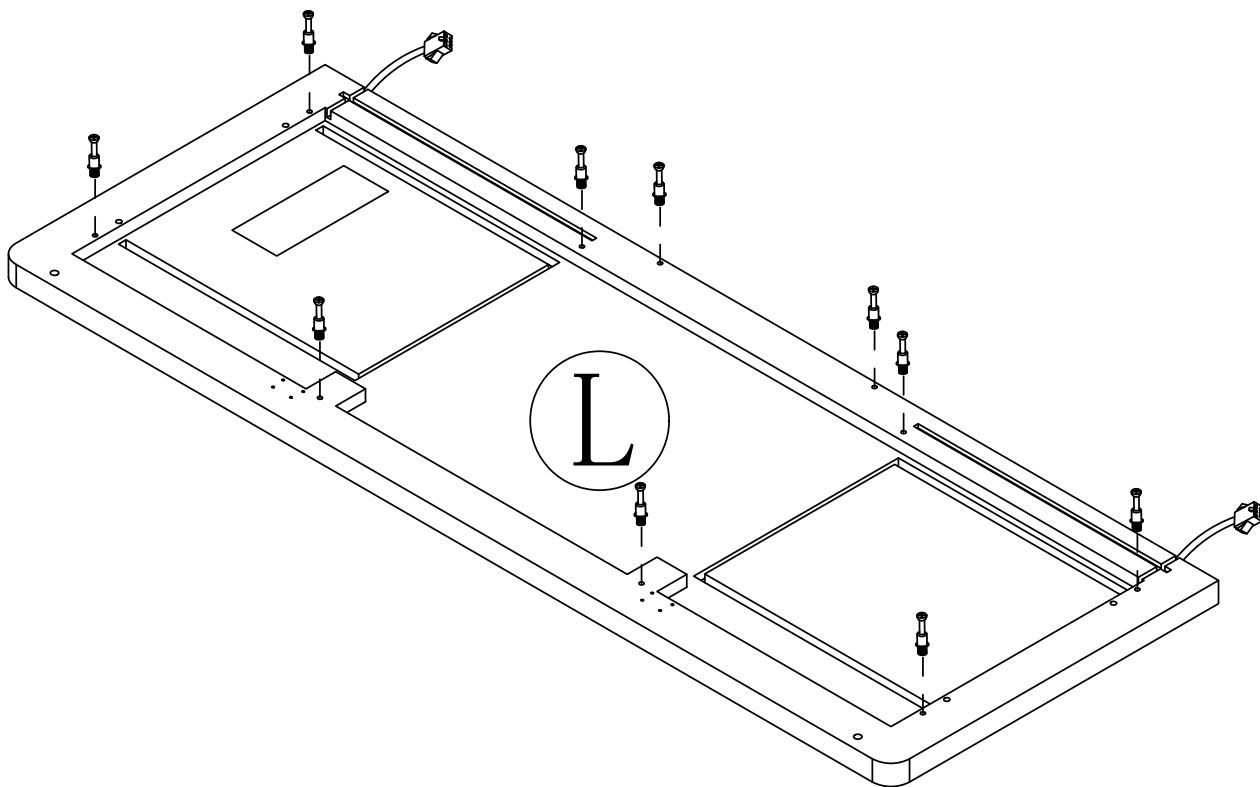

Step 22

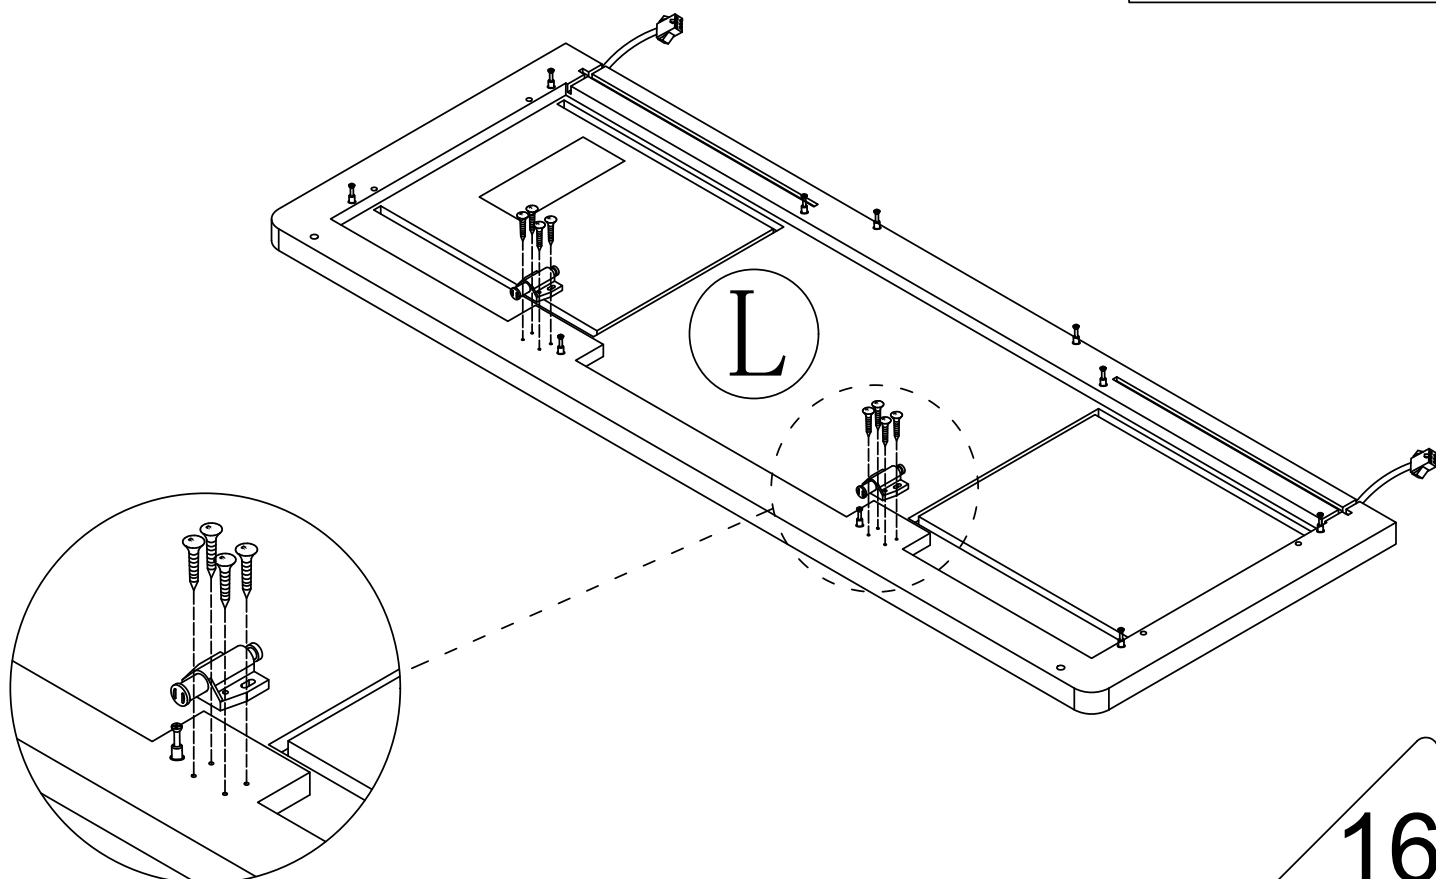


Step 23



2





x10

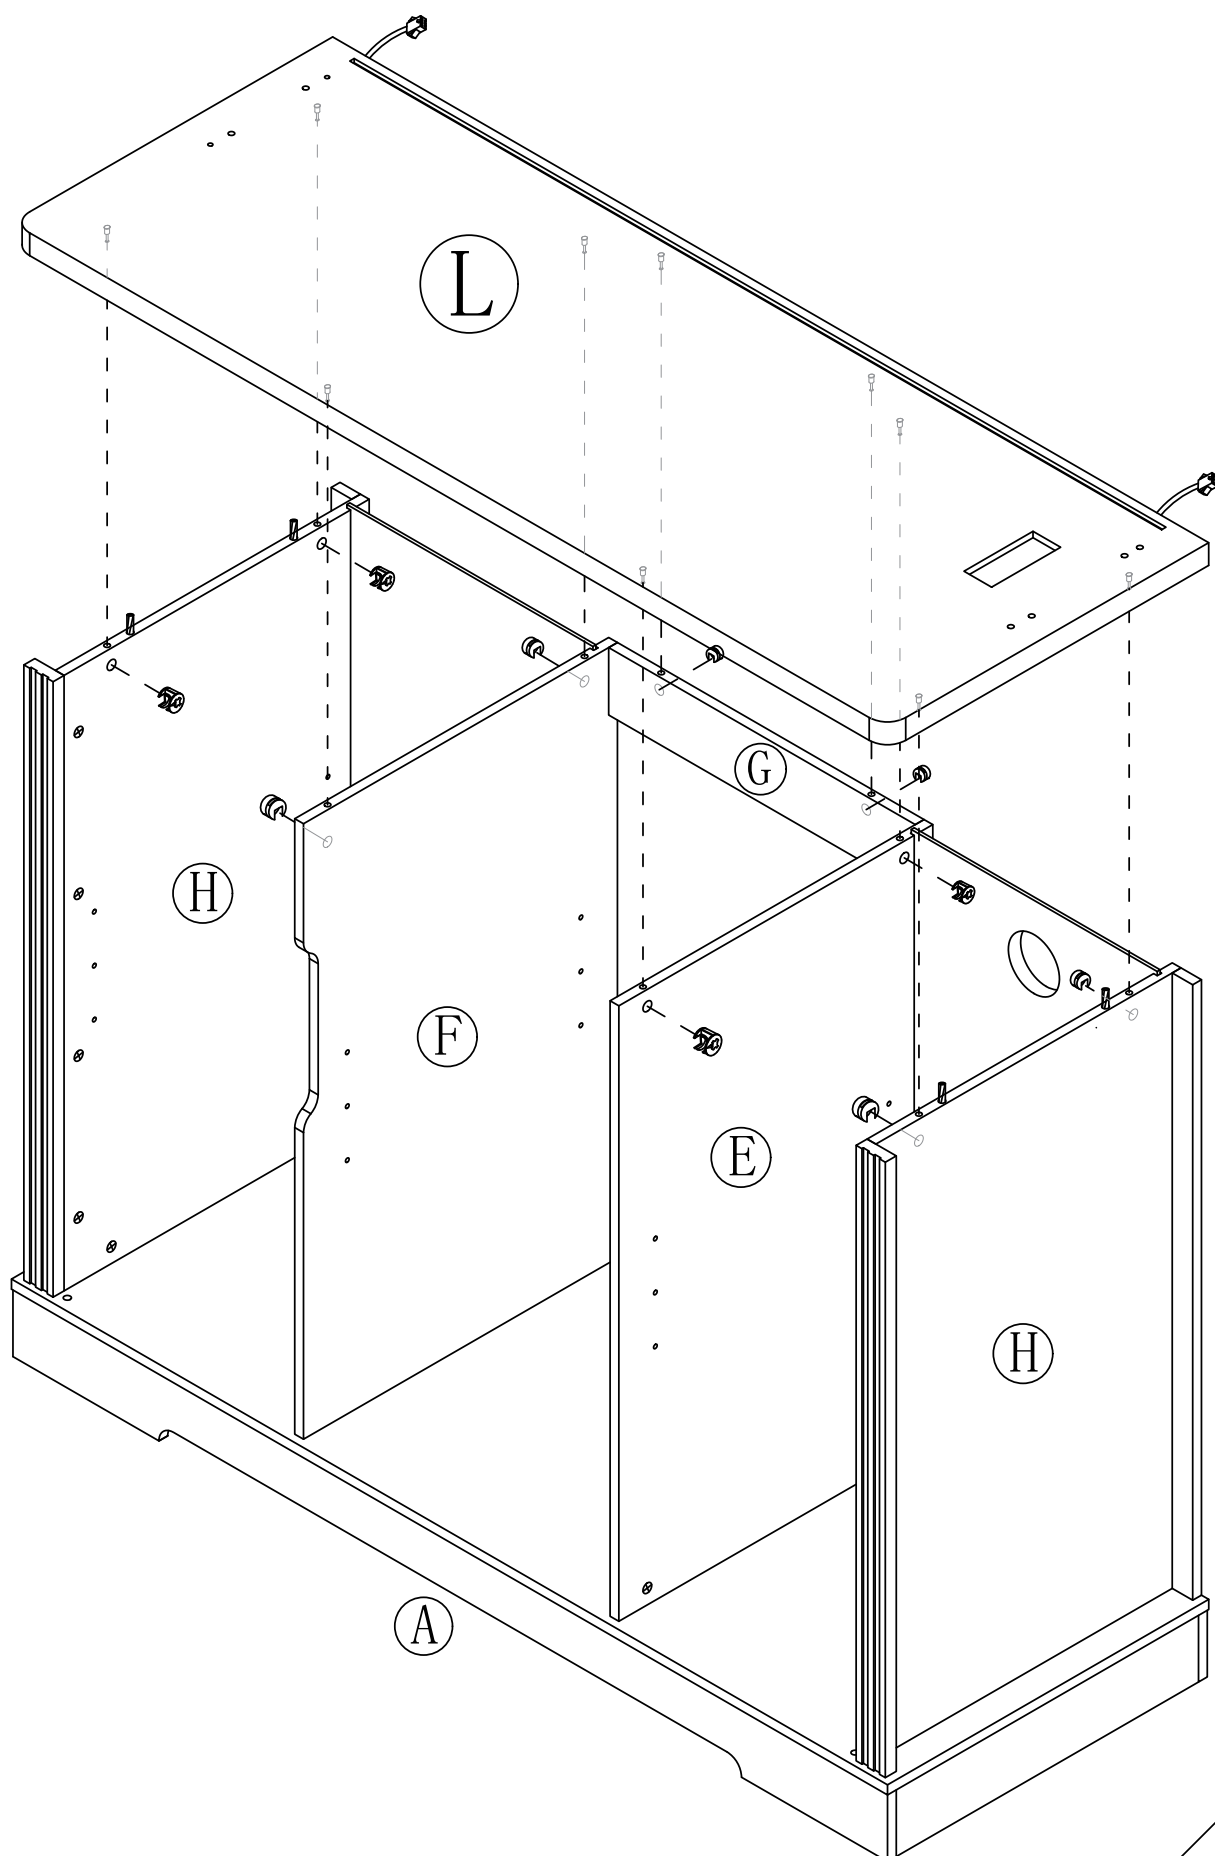



Step 24

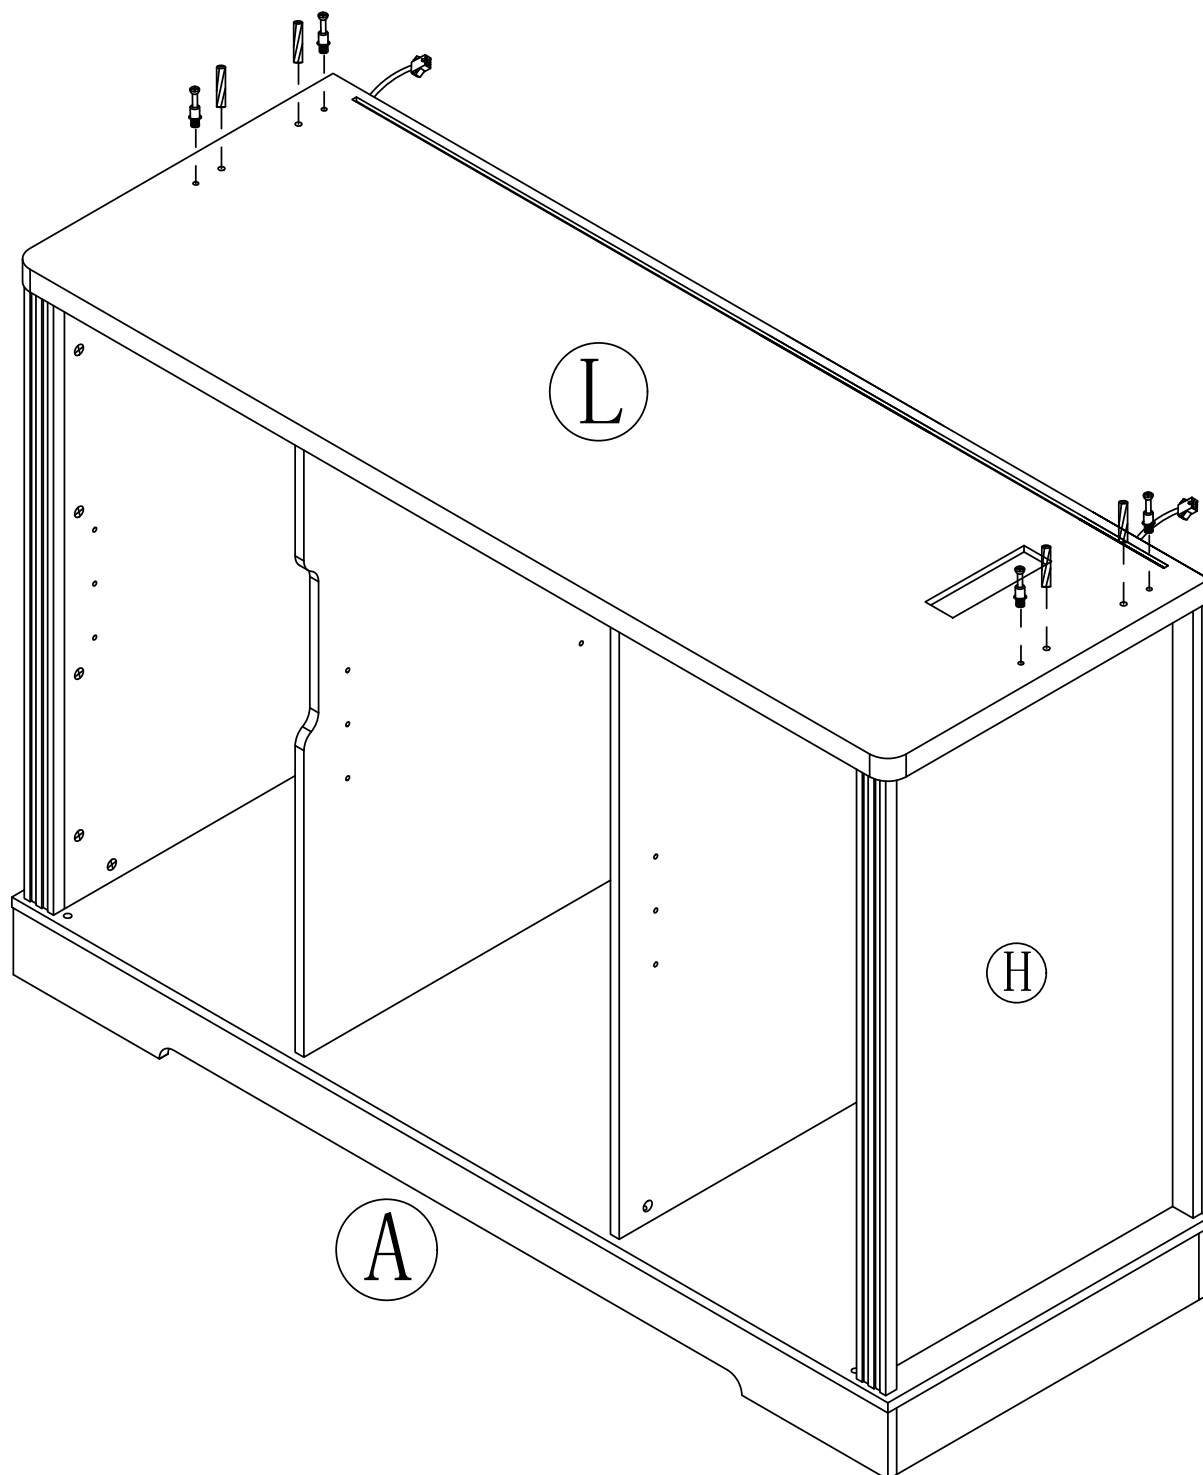

Step 25

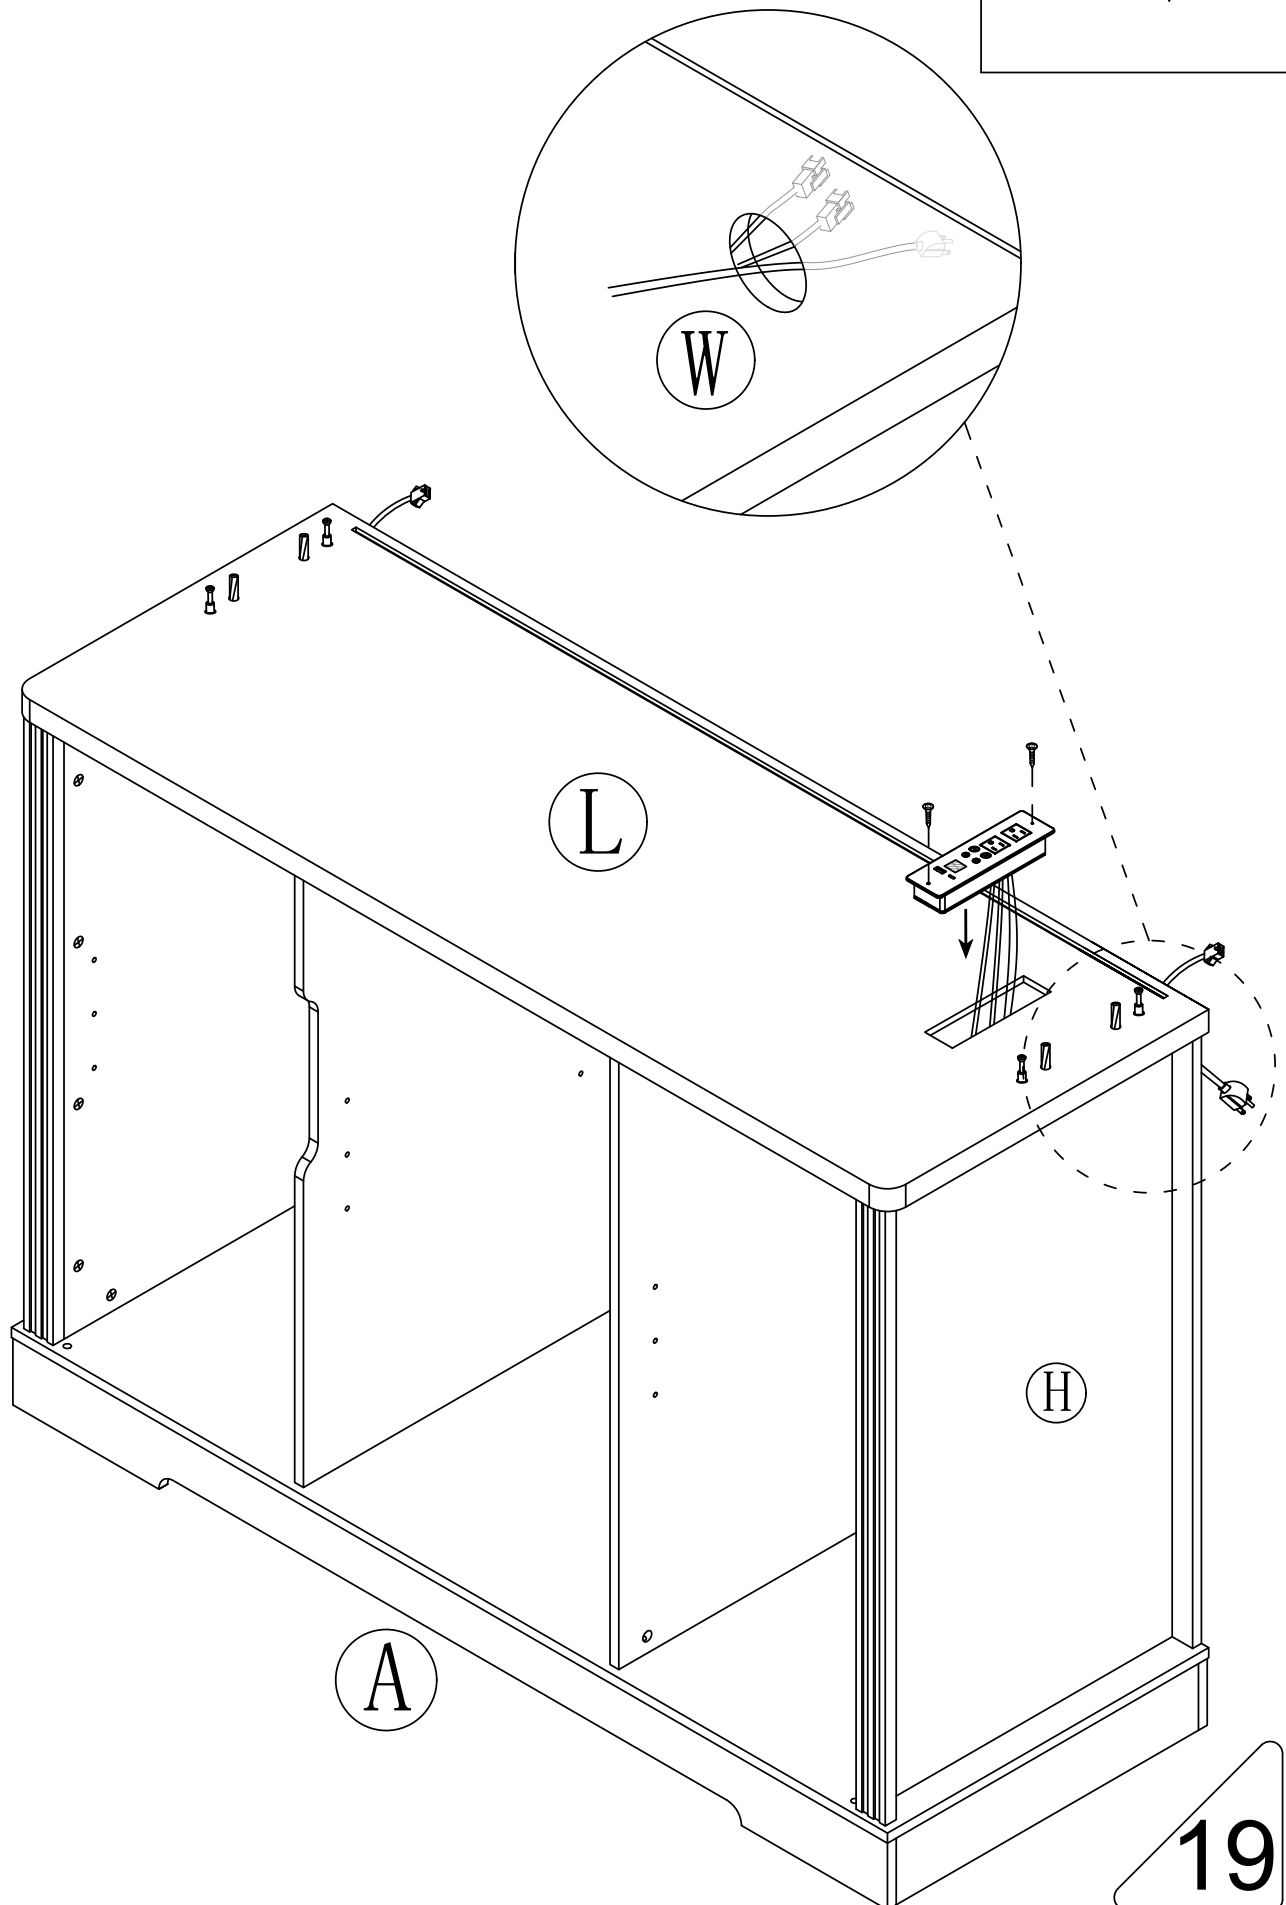



Step 26

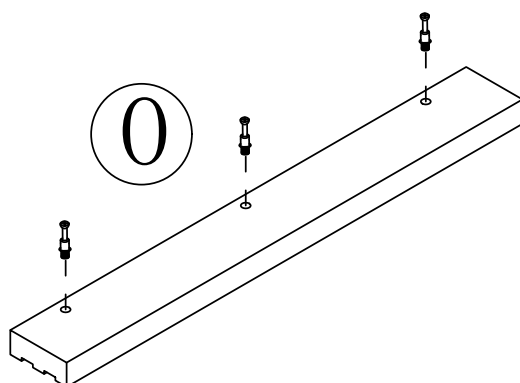


x2


Step 27

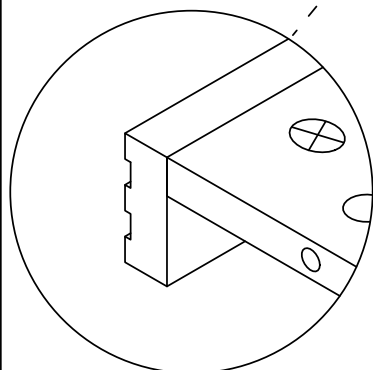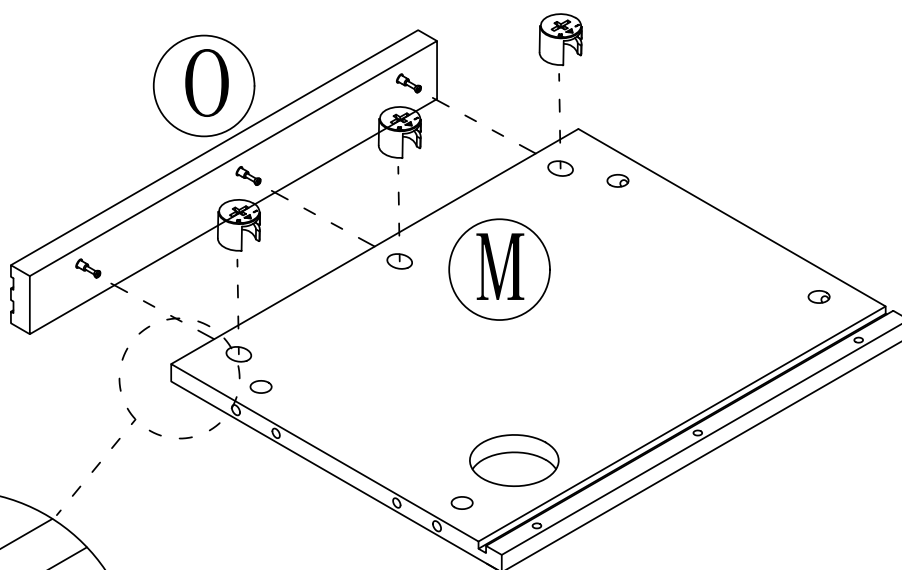

After the installation is completed here,
it will be as shown in the left picture.


Step 28

⑤  x3

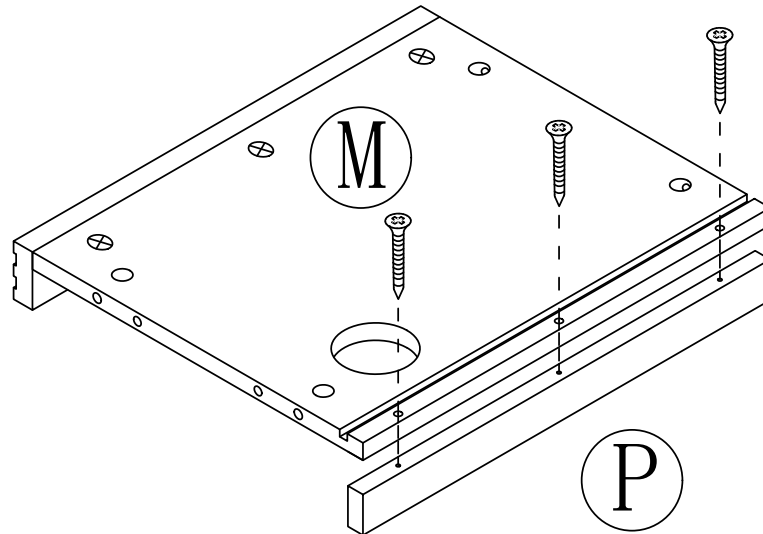

Step 29

④  x1

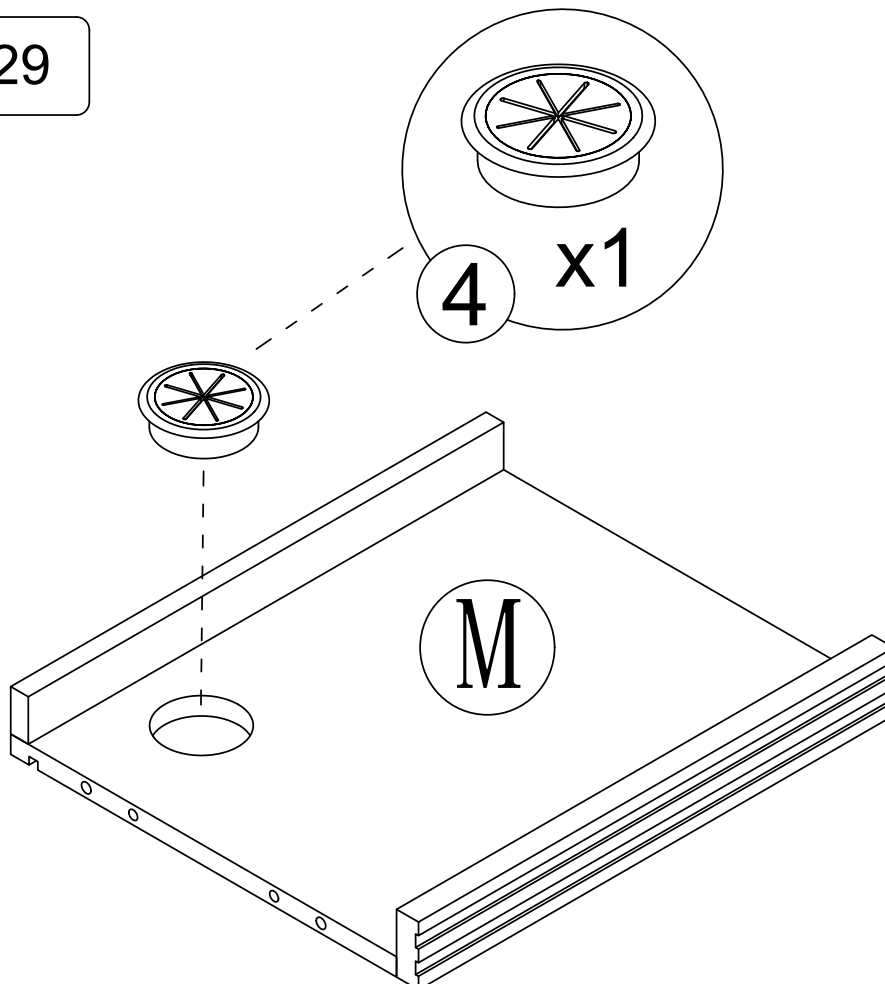


Step 30

2




x3

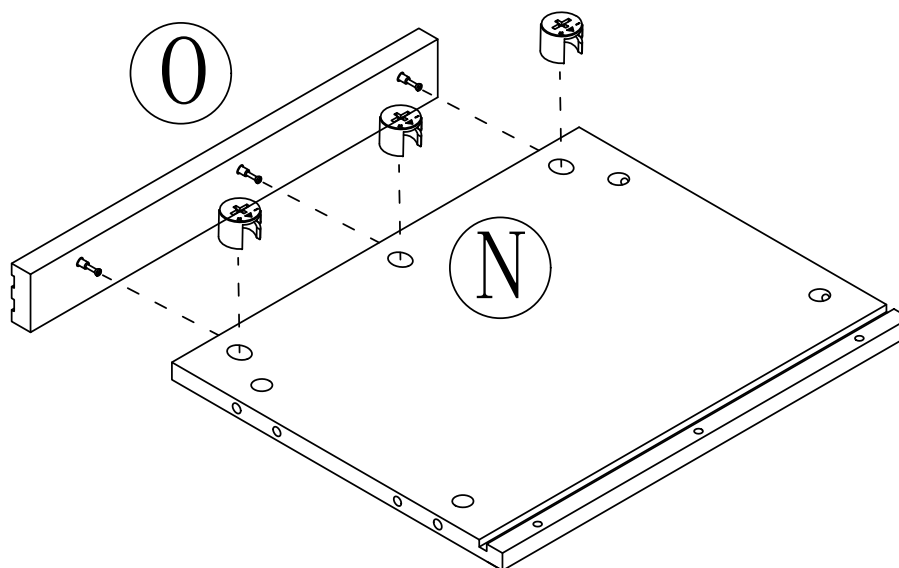


Step 31

5



x3

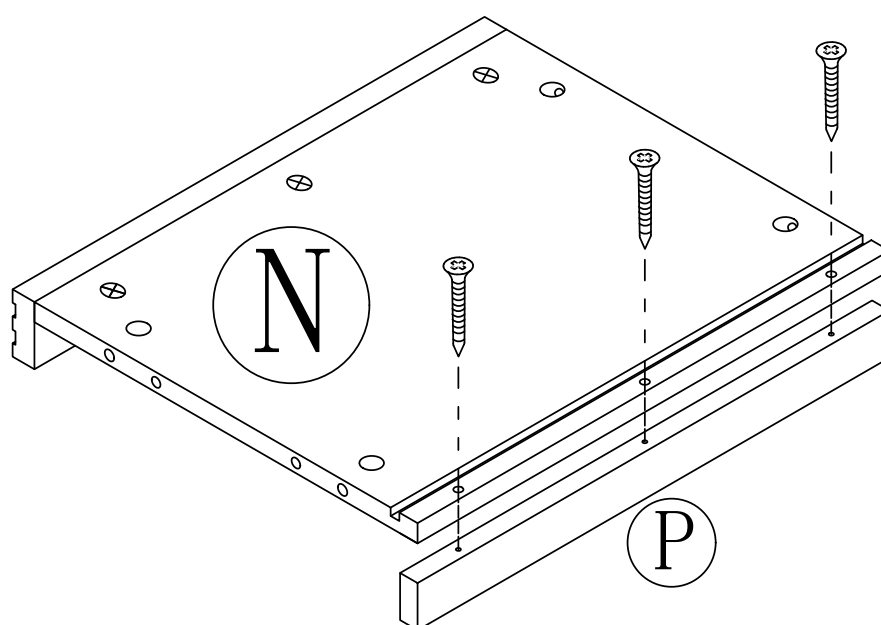


Step 32

2




x4

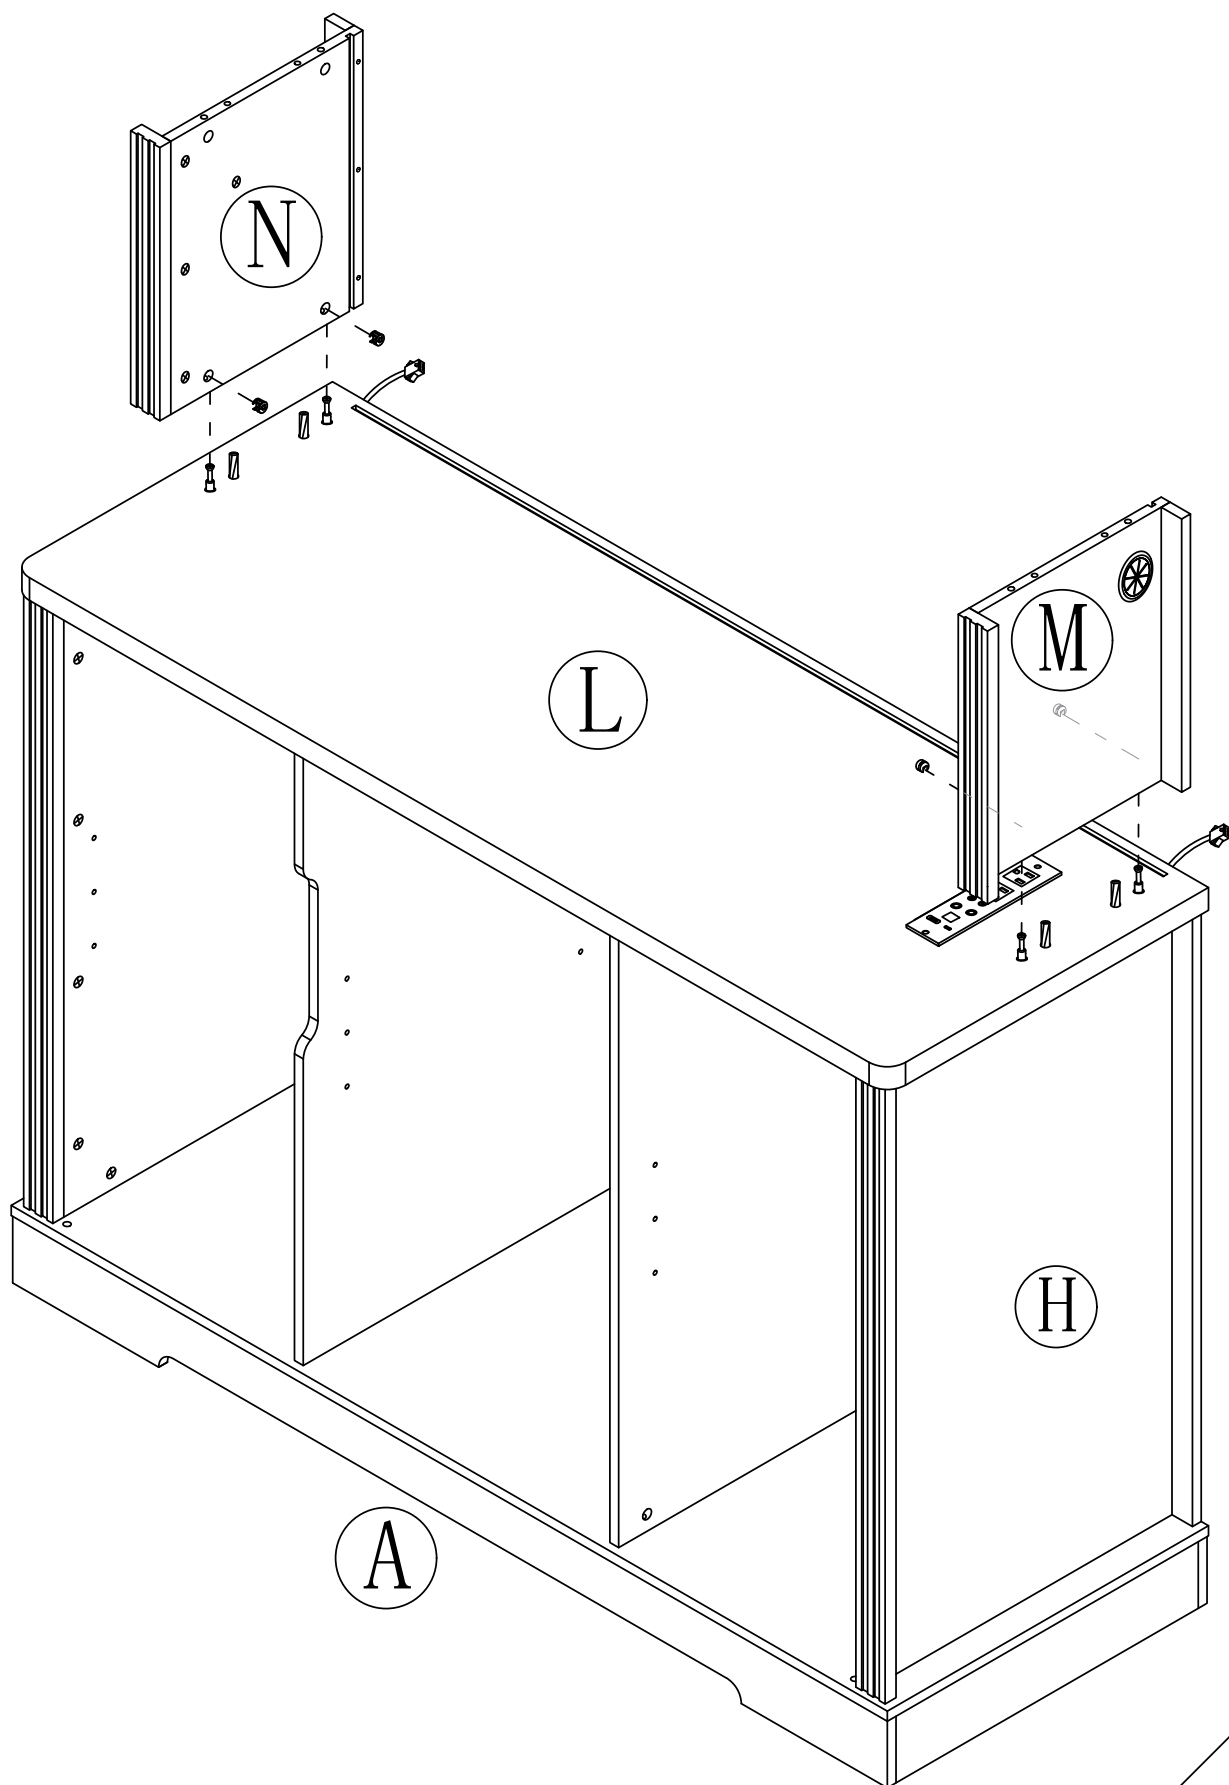


Step 33



③  x4

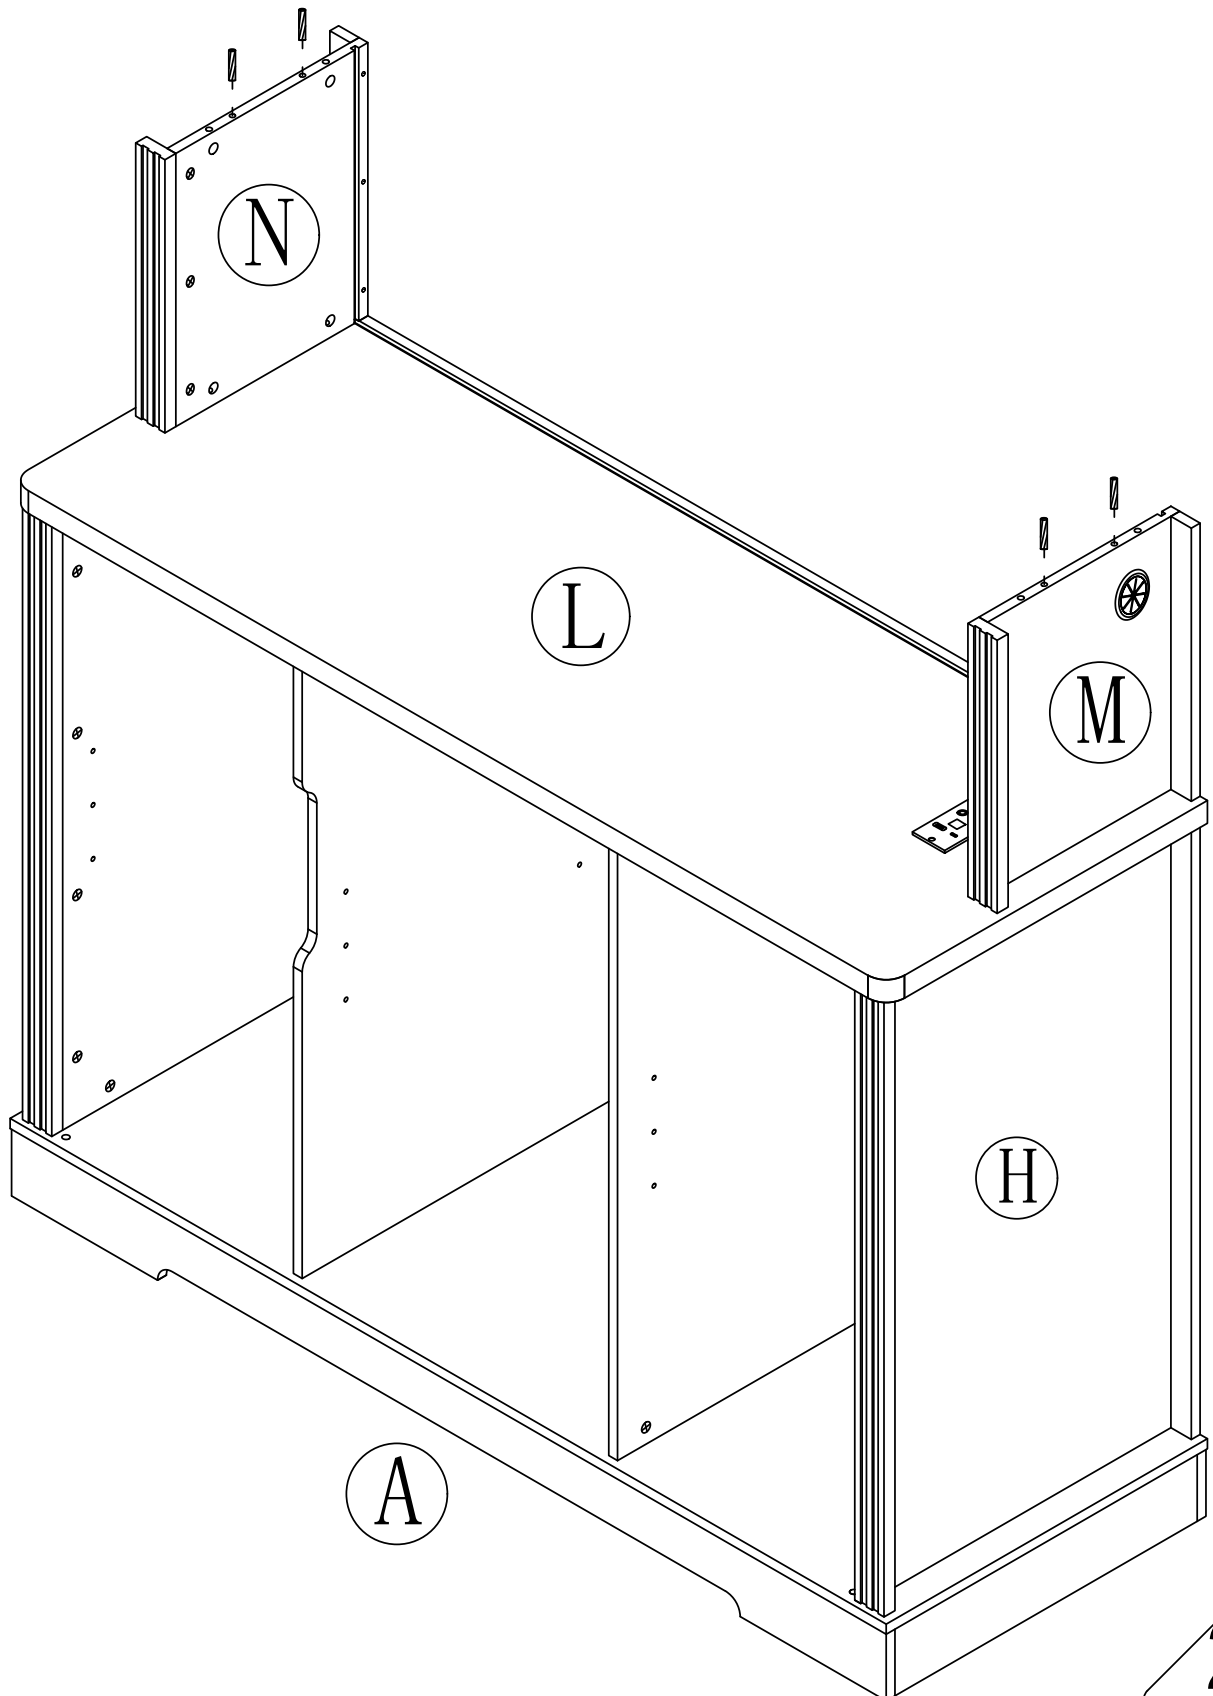



Step 34

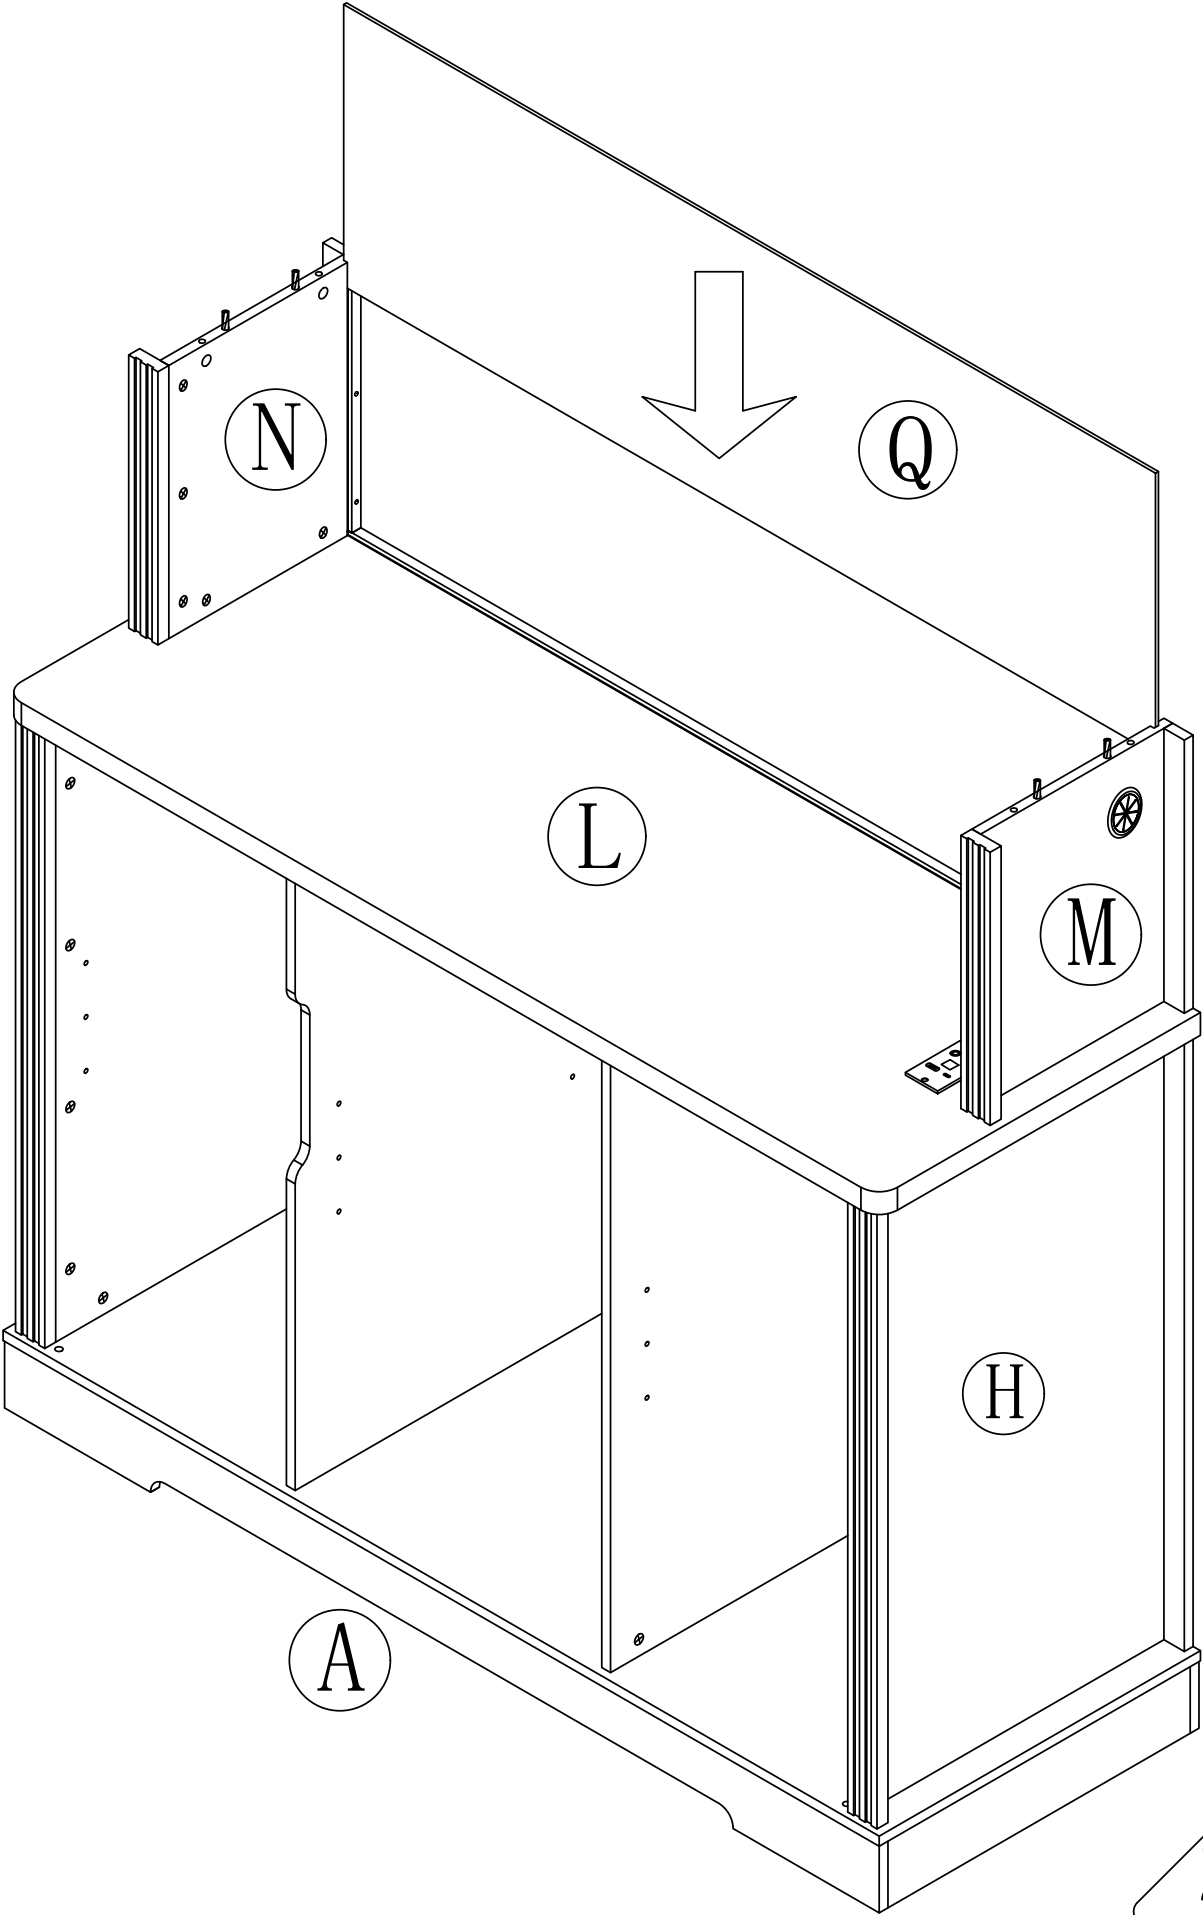

Step 35

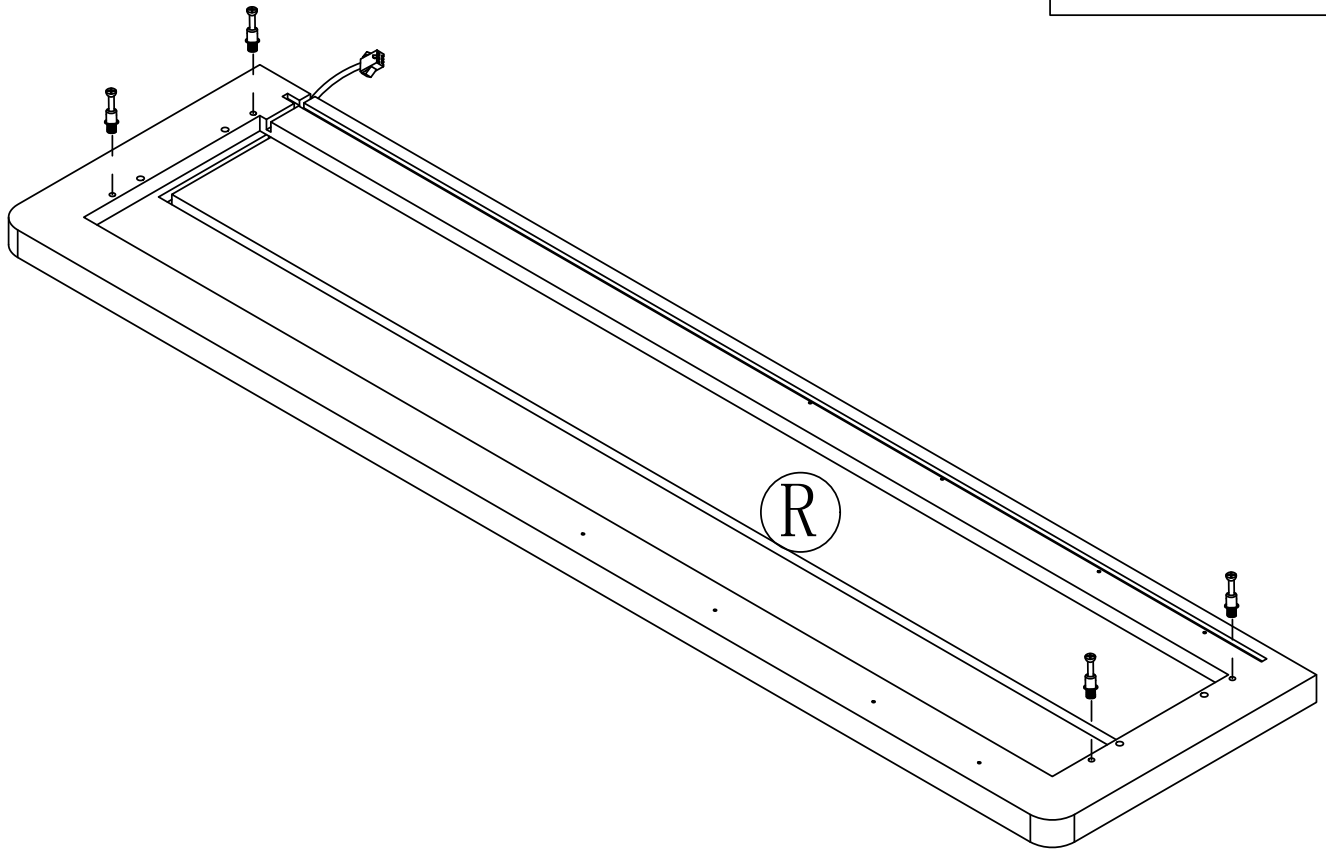

Step 36

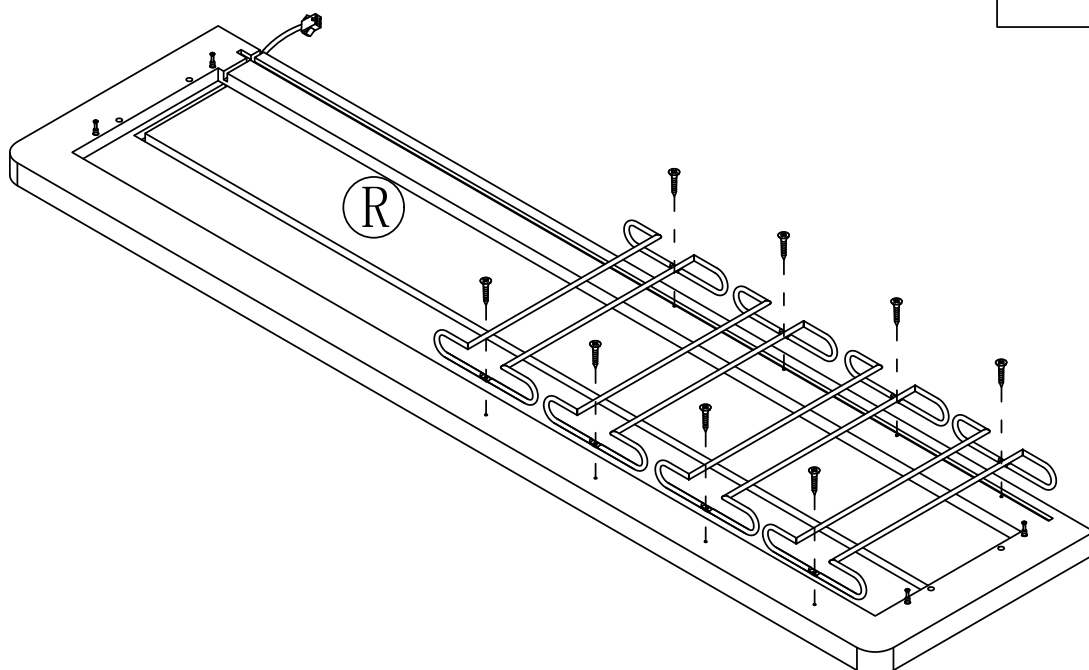


Step 37

2




x4

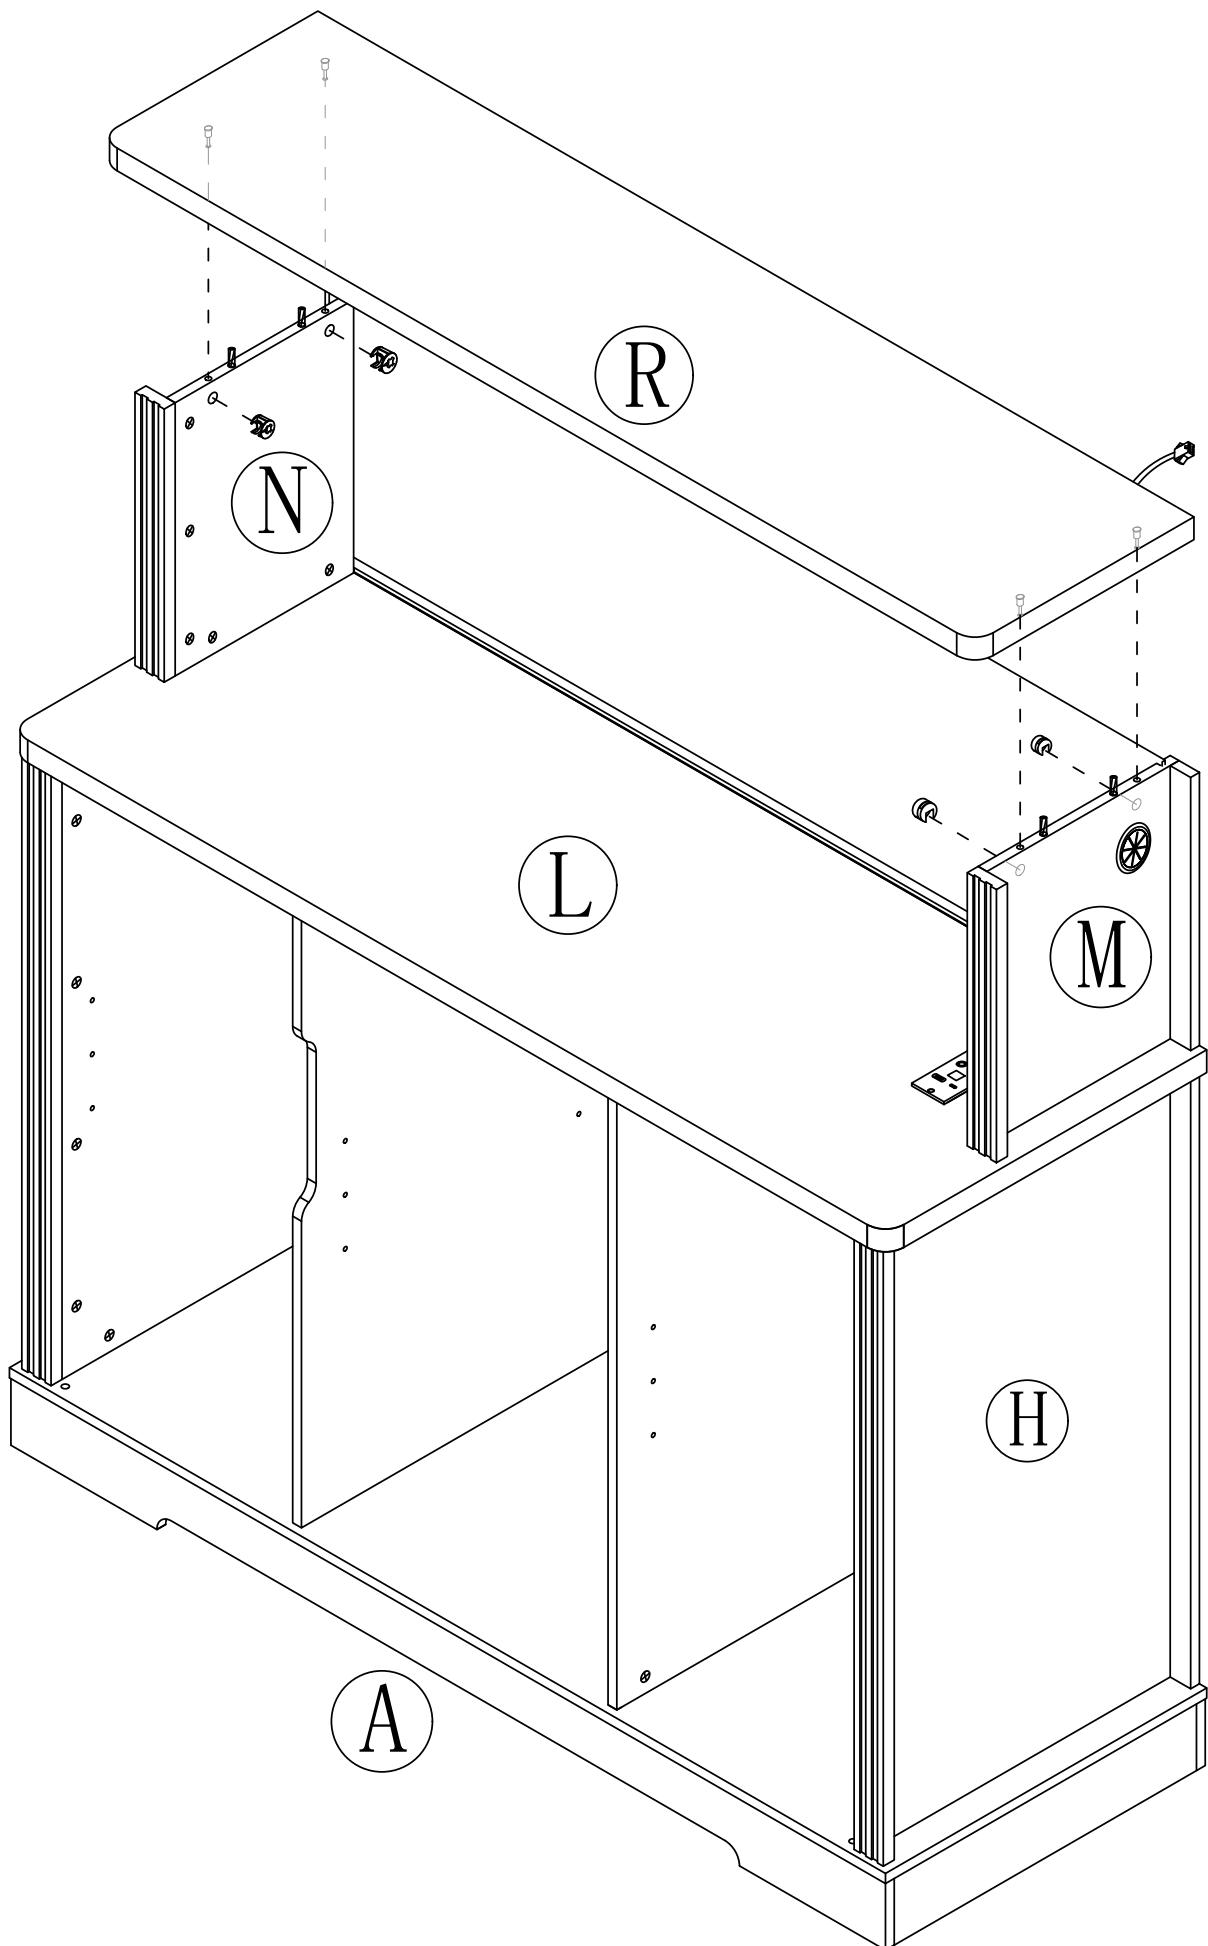


Step 38

8




x12

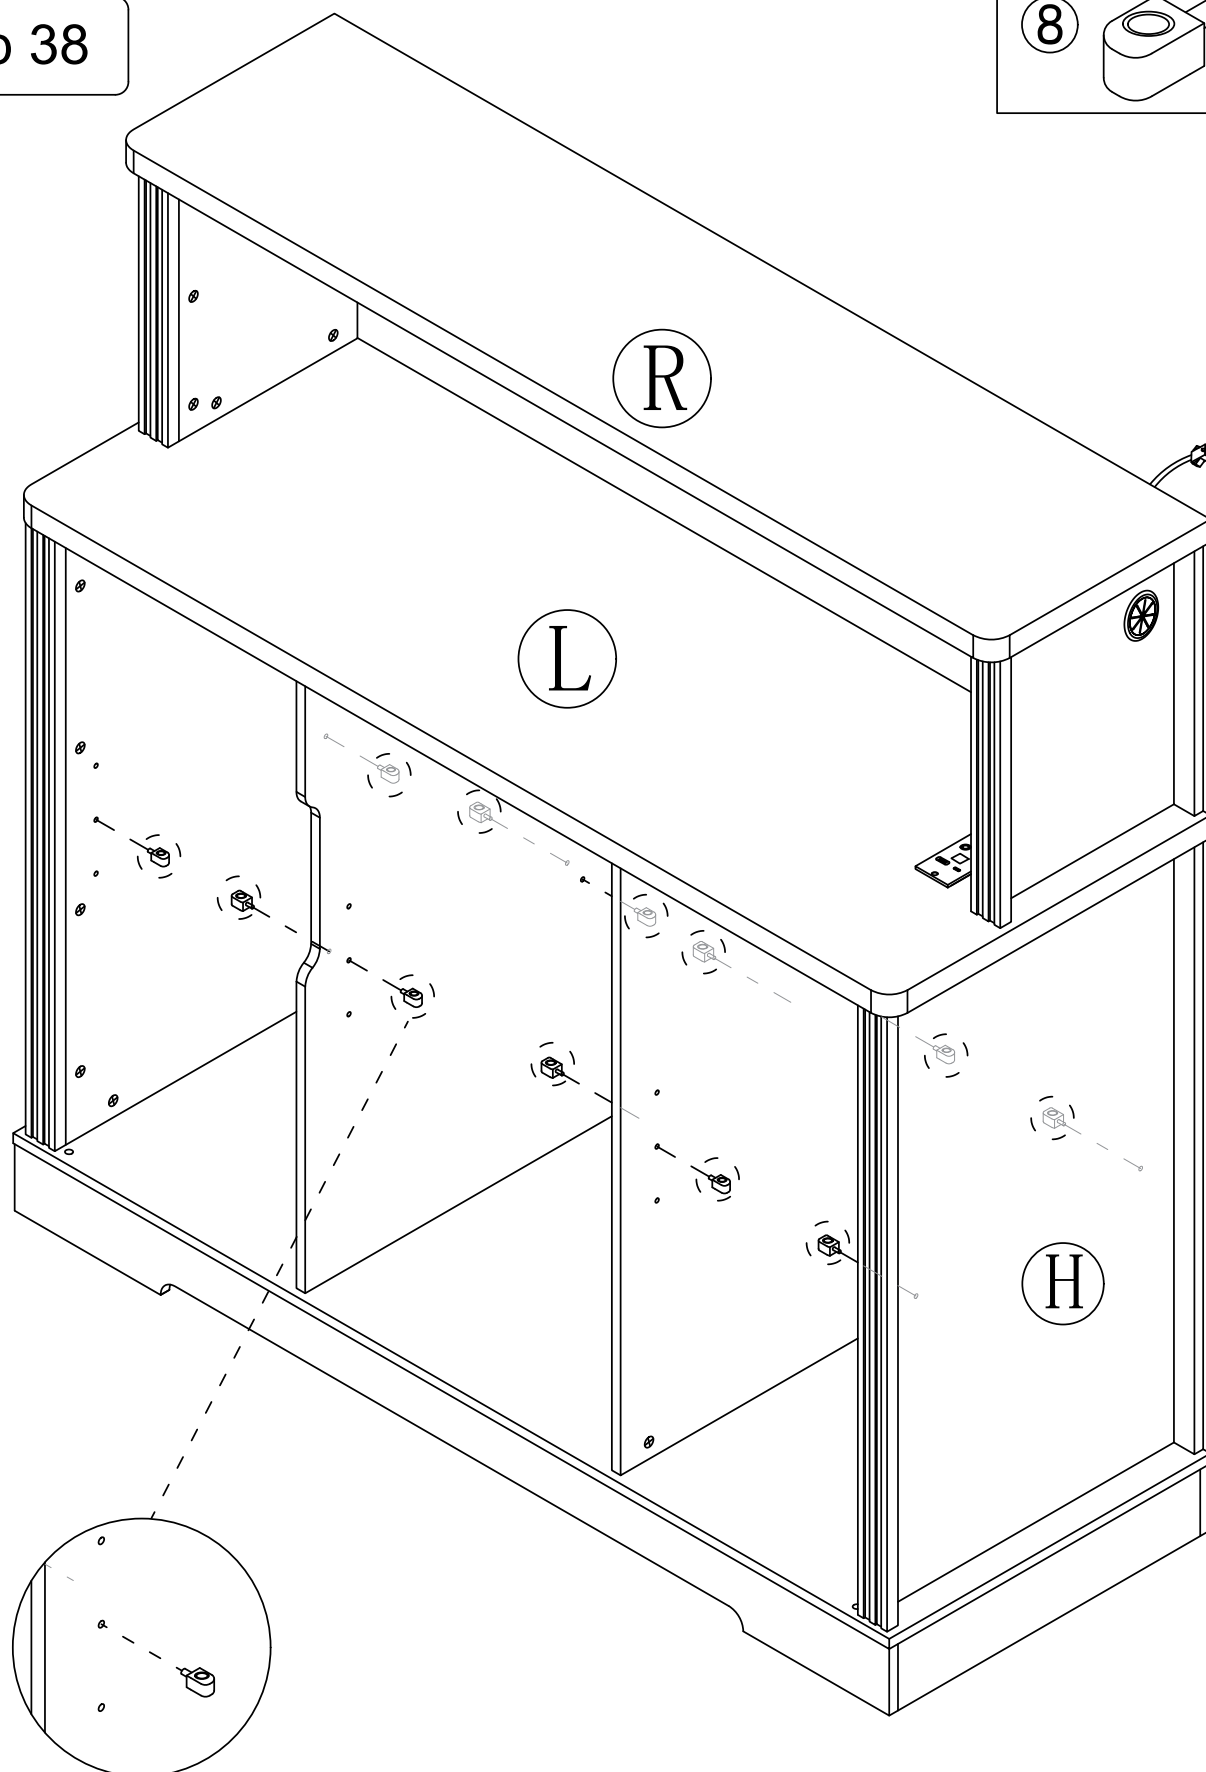


It can be adjusted up and down.

Step 39

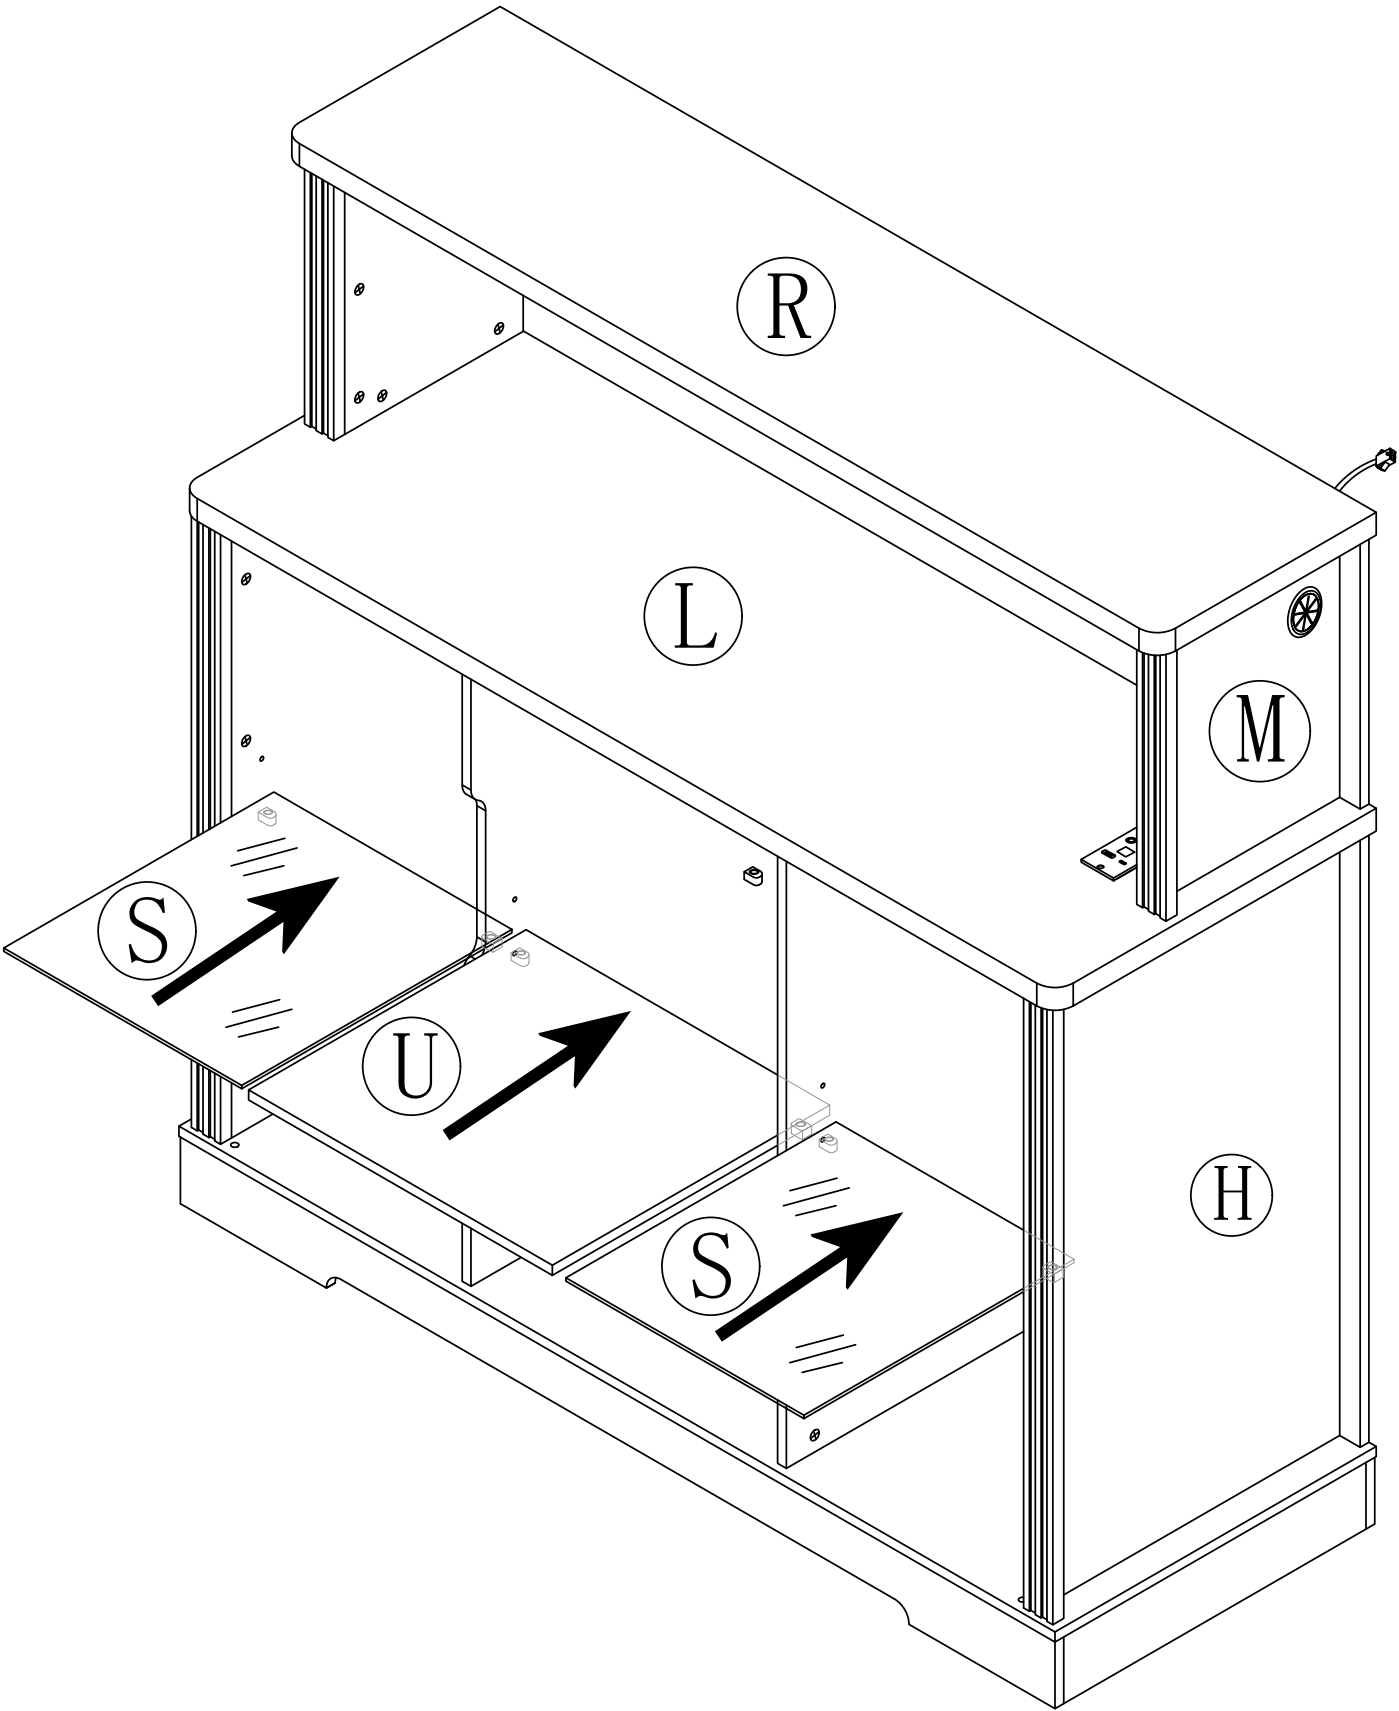


Step 40


First, completely unscrew the screws on the parts




Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

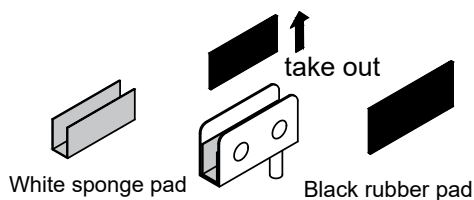

6




x1



x1

Left door

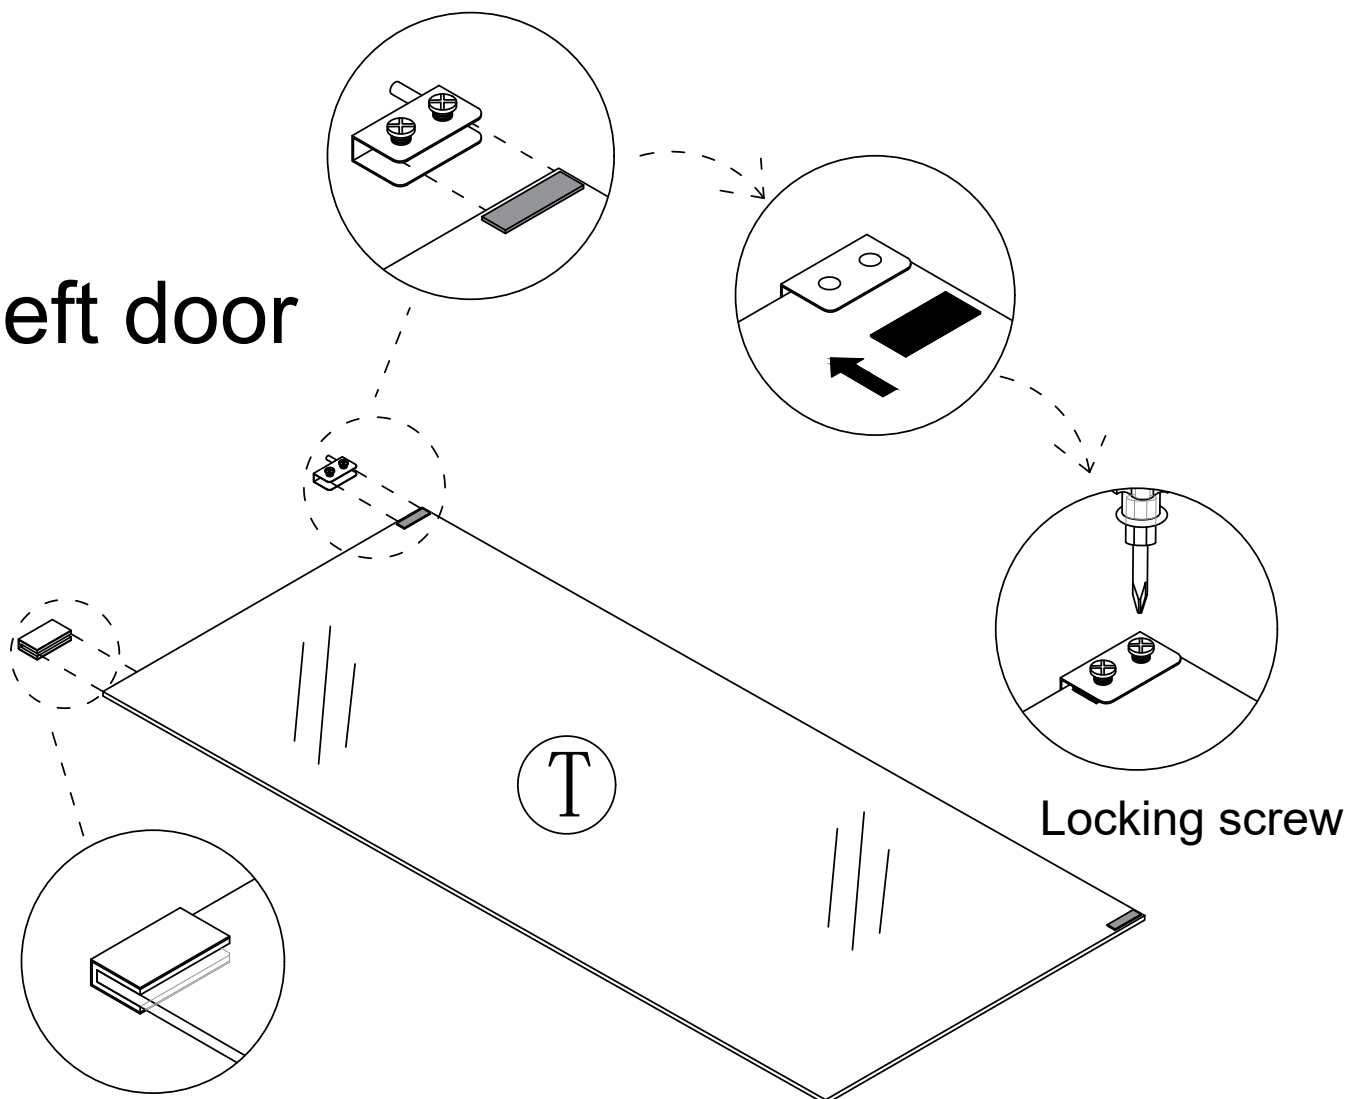

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 41

6


 x1

 x1

x1

x1





Right door

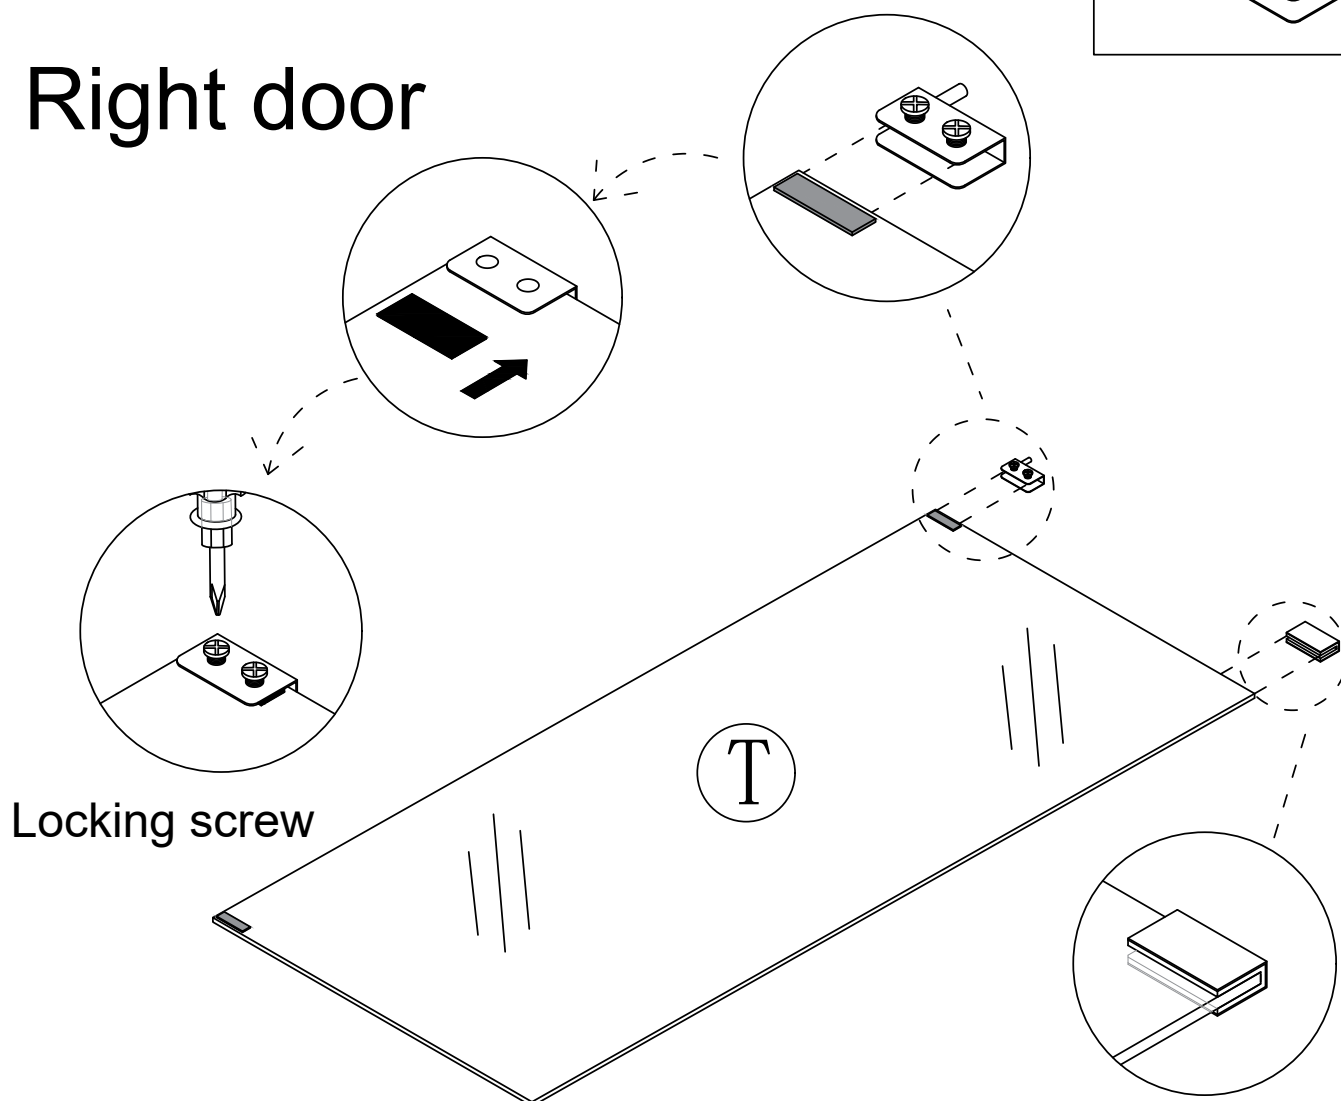

Pay attention to the direction of the door hinge,
rotate the screws to compress the black gasket,
and do not place it in the opposite direction


Place the black gasket on the side where the screws are installed

Step 42

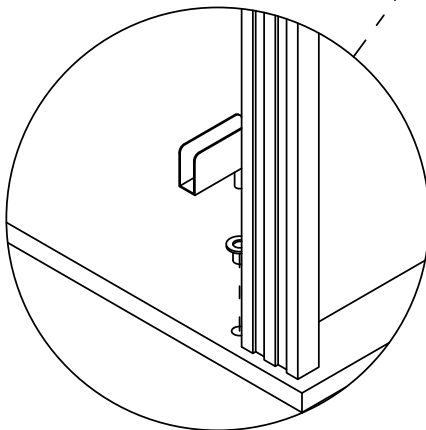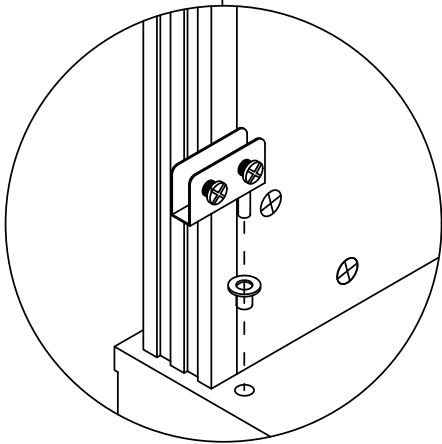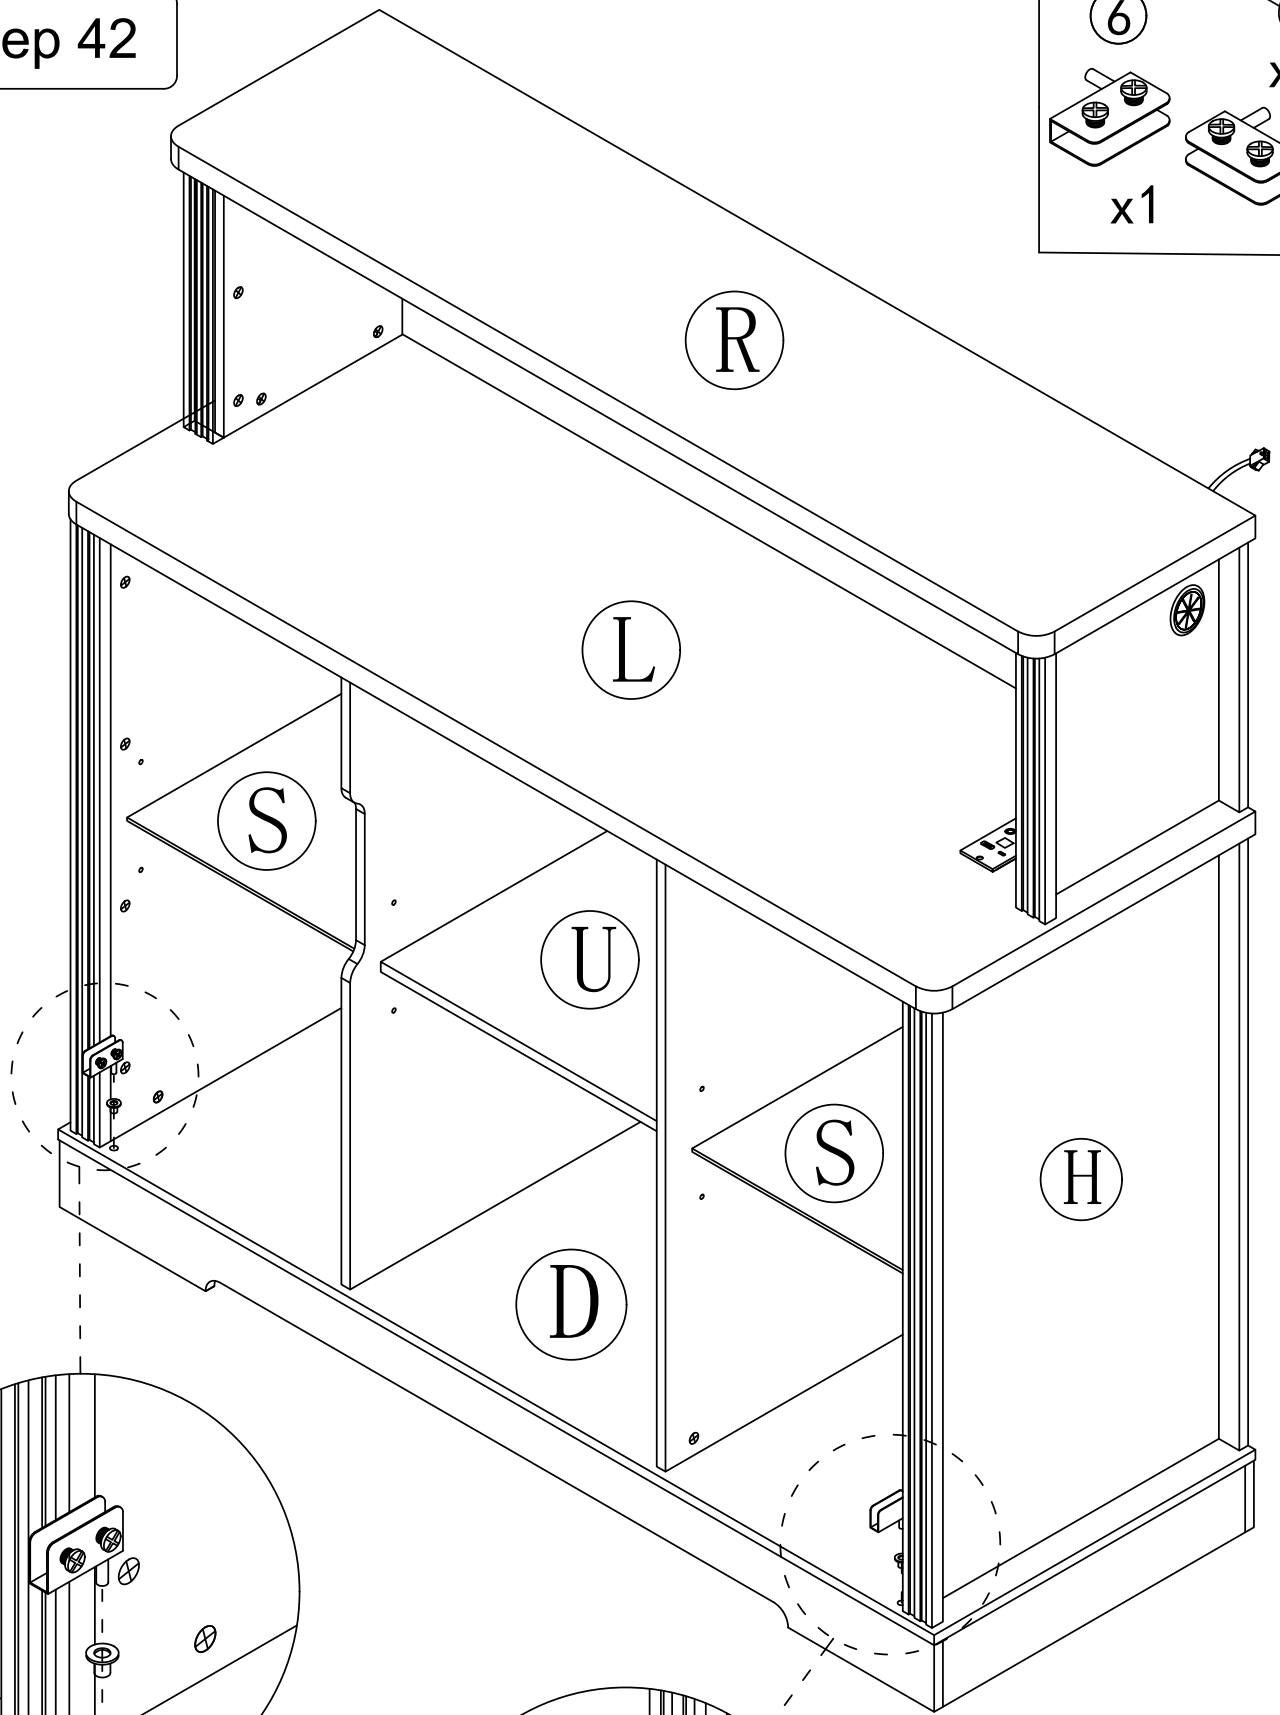


Step 43

⑥  x2




first




second

After installing the glass door, place the black gasket on the side where the screws are installed



third

Locking screw

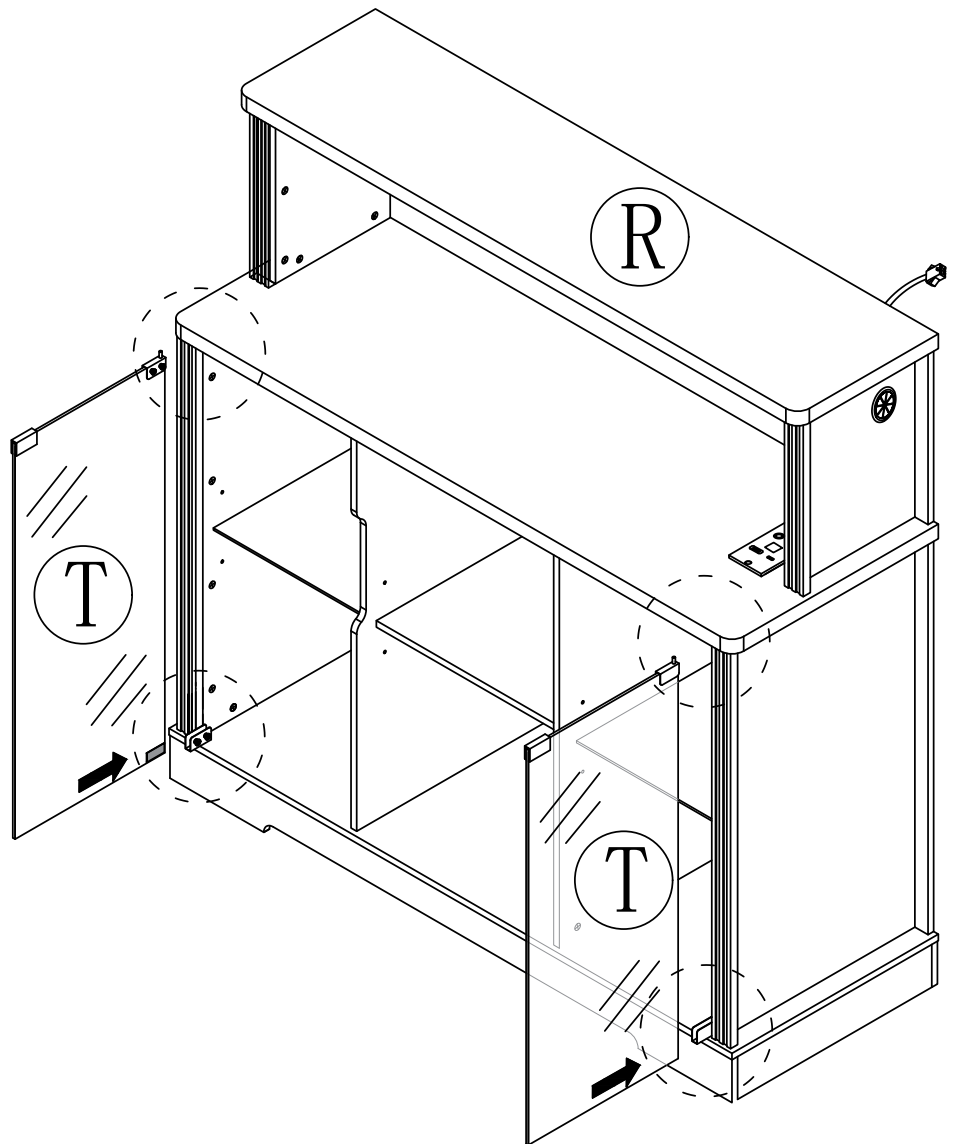


Pay attention to the direction of the door hinge during installation

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.



Step 44

The rebound device automatically opens and closes by pressing

Open the glass door


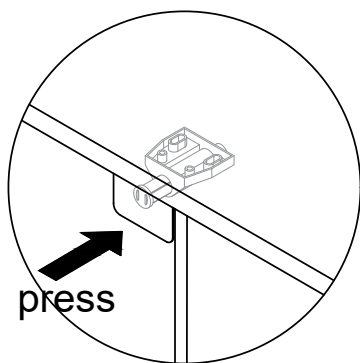


Close the glass door

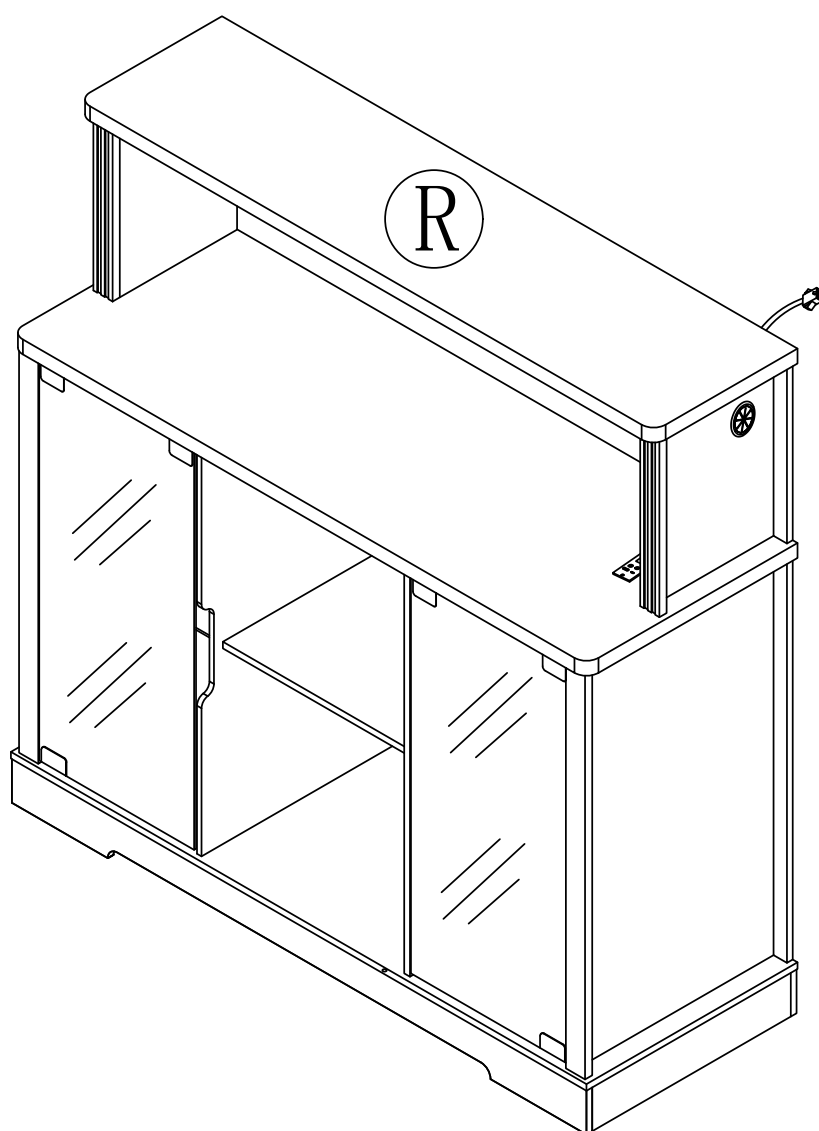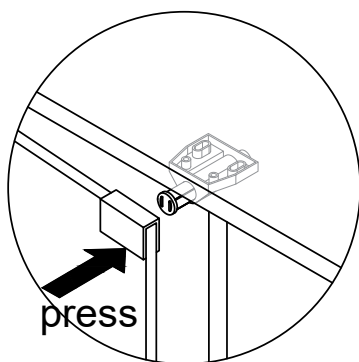



Step 45

9   x24

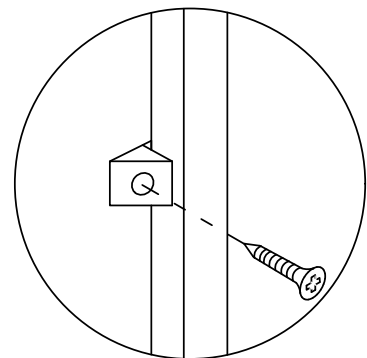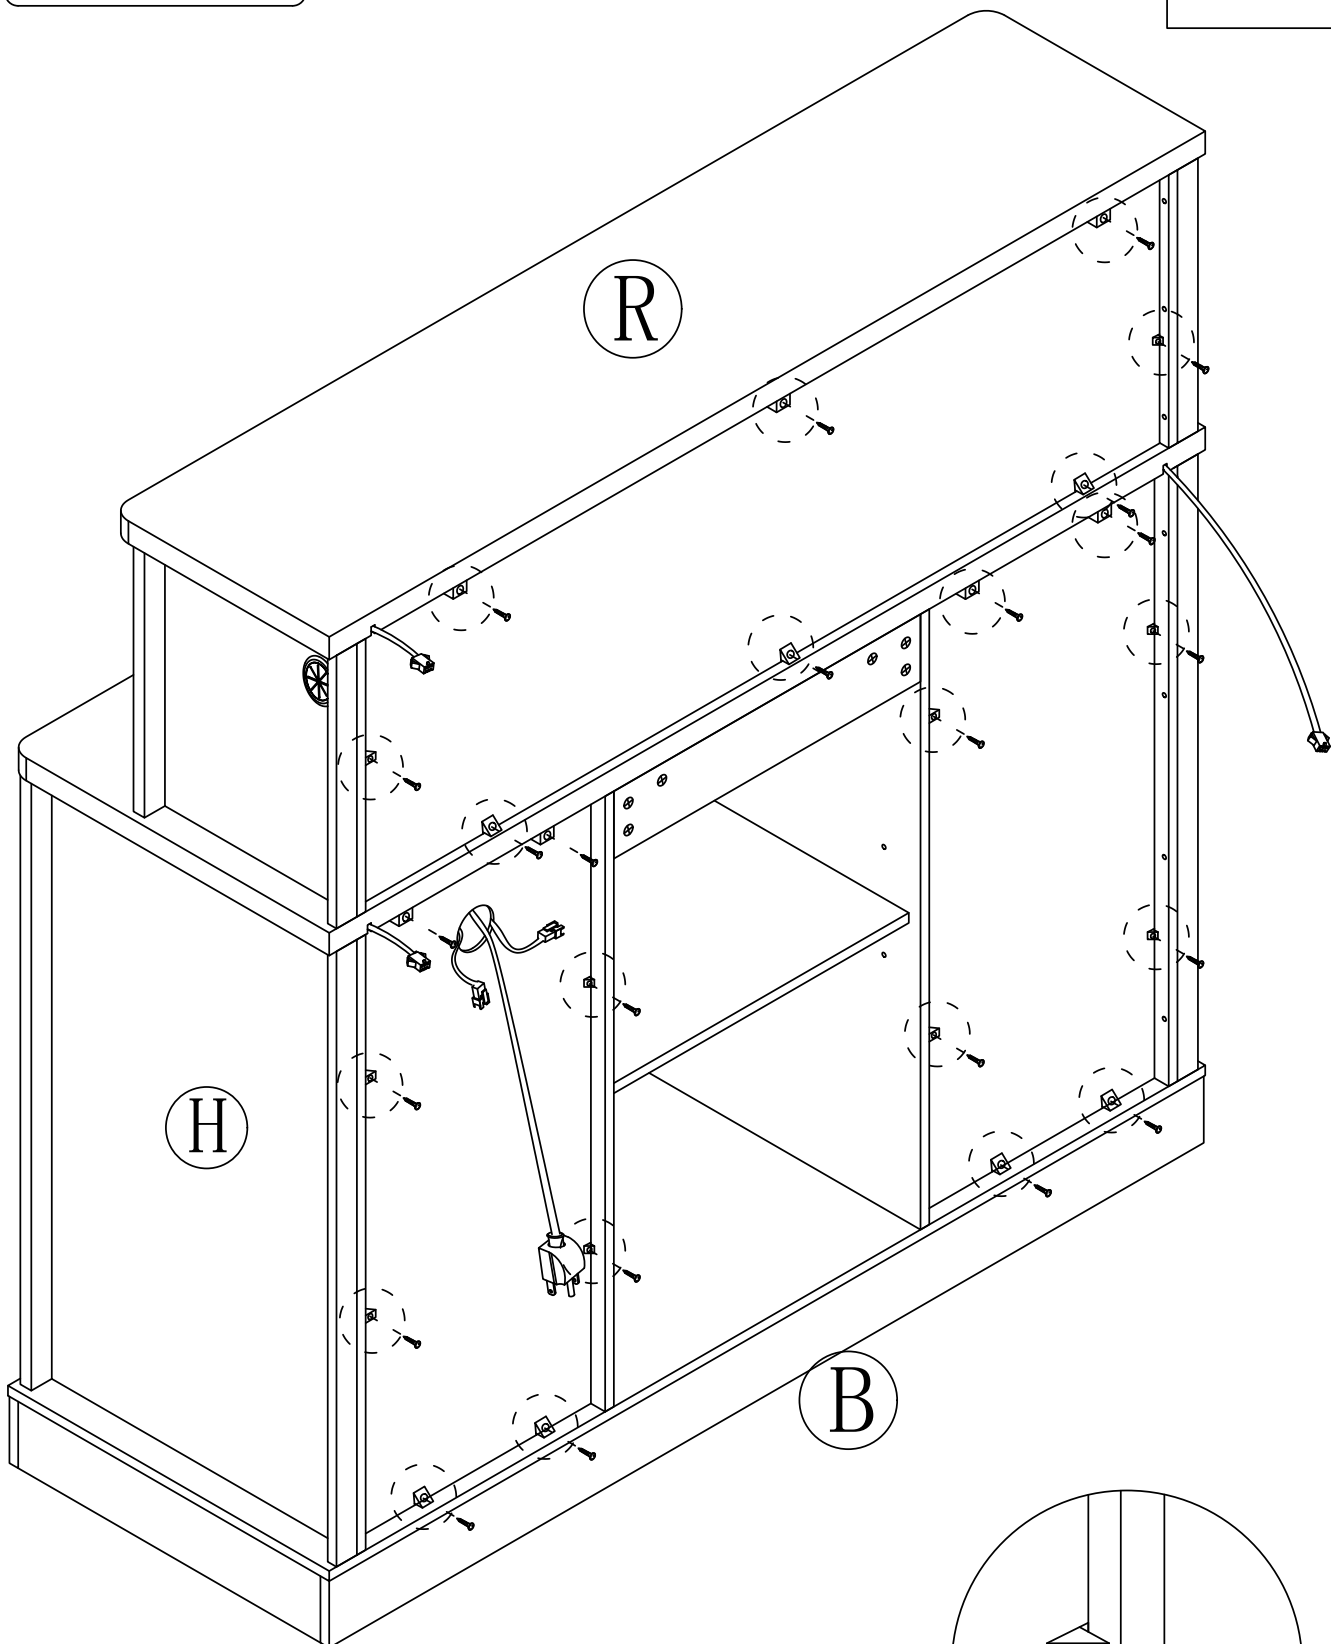


Step 46

12
x1

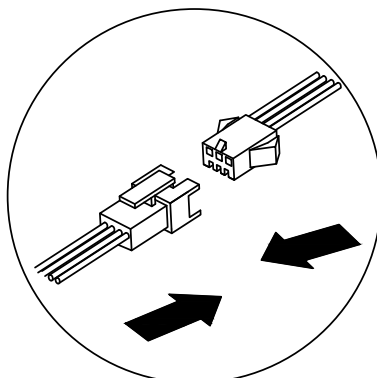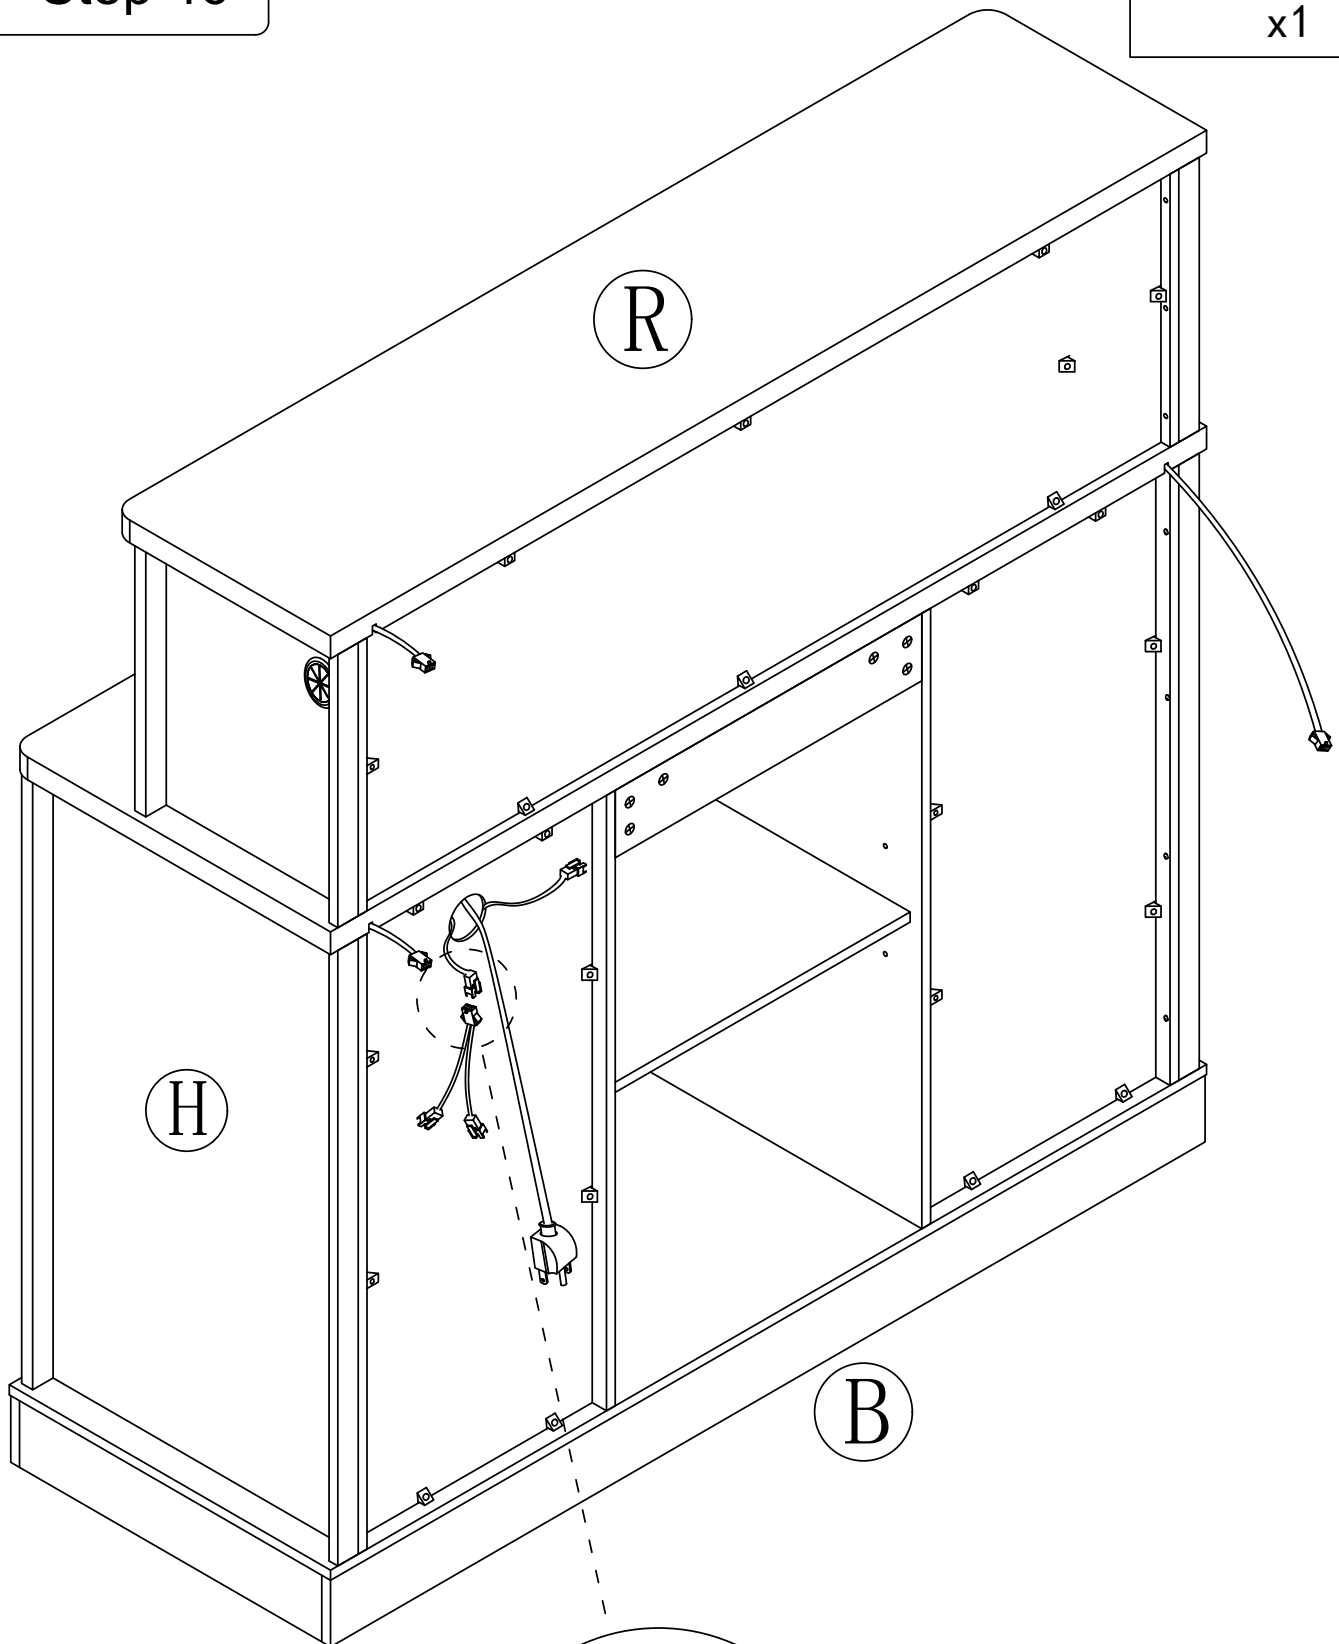

Step 47


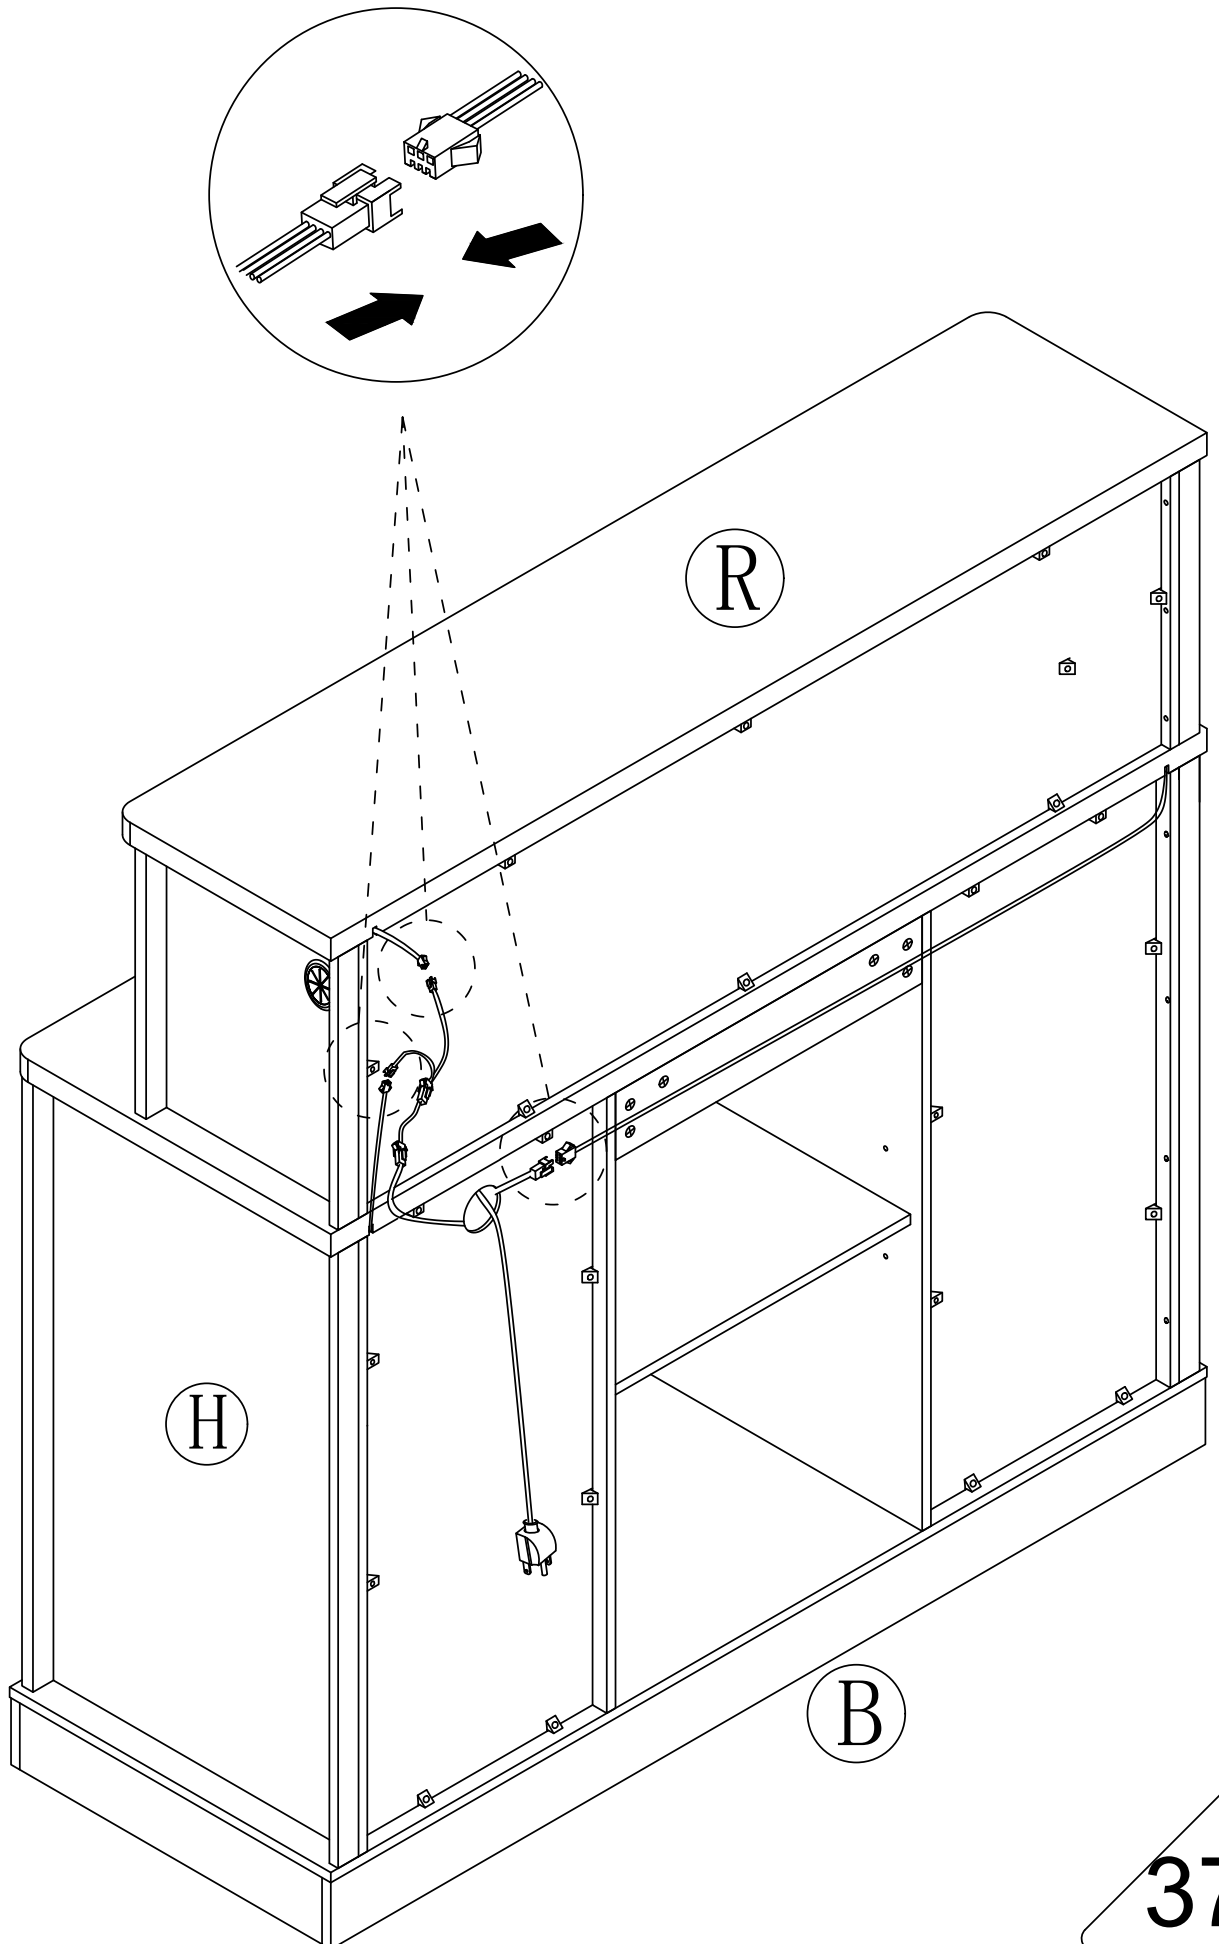


Step 48




13



x3

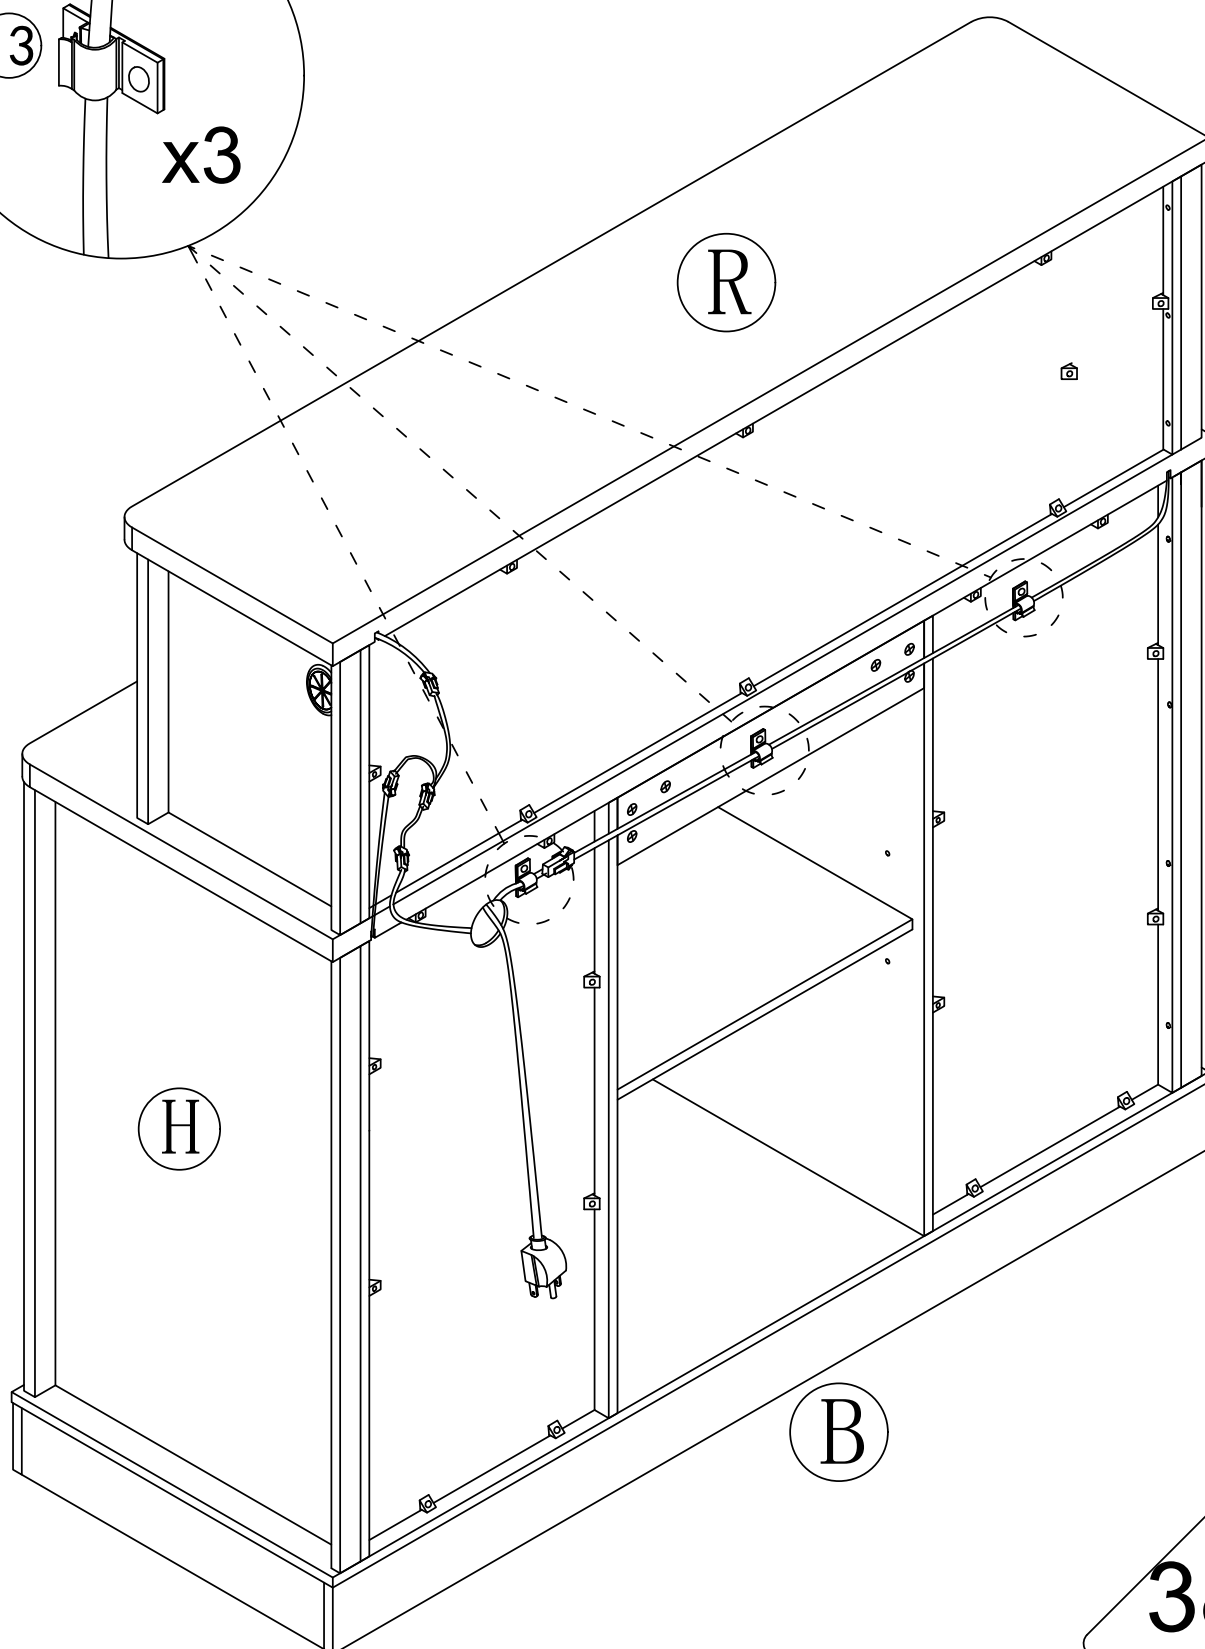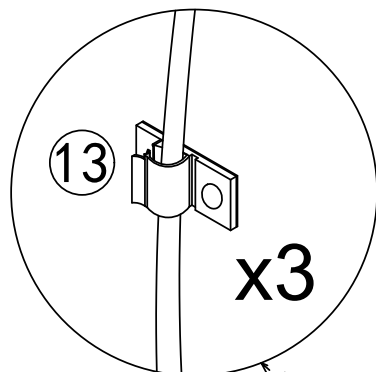


Step 49

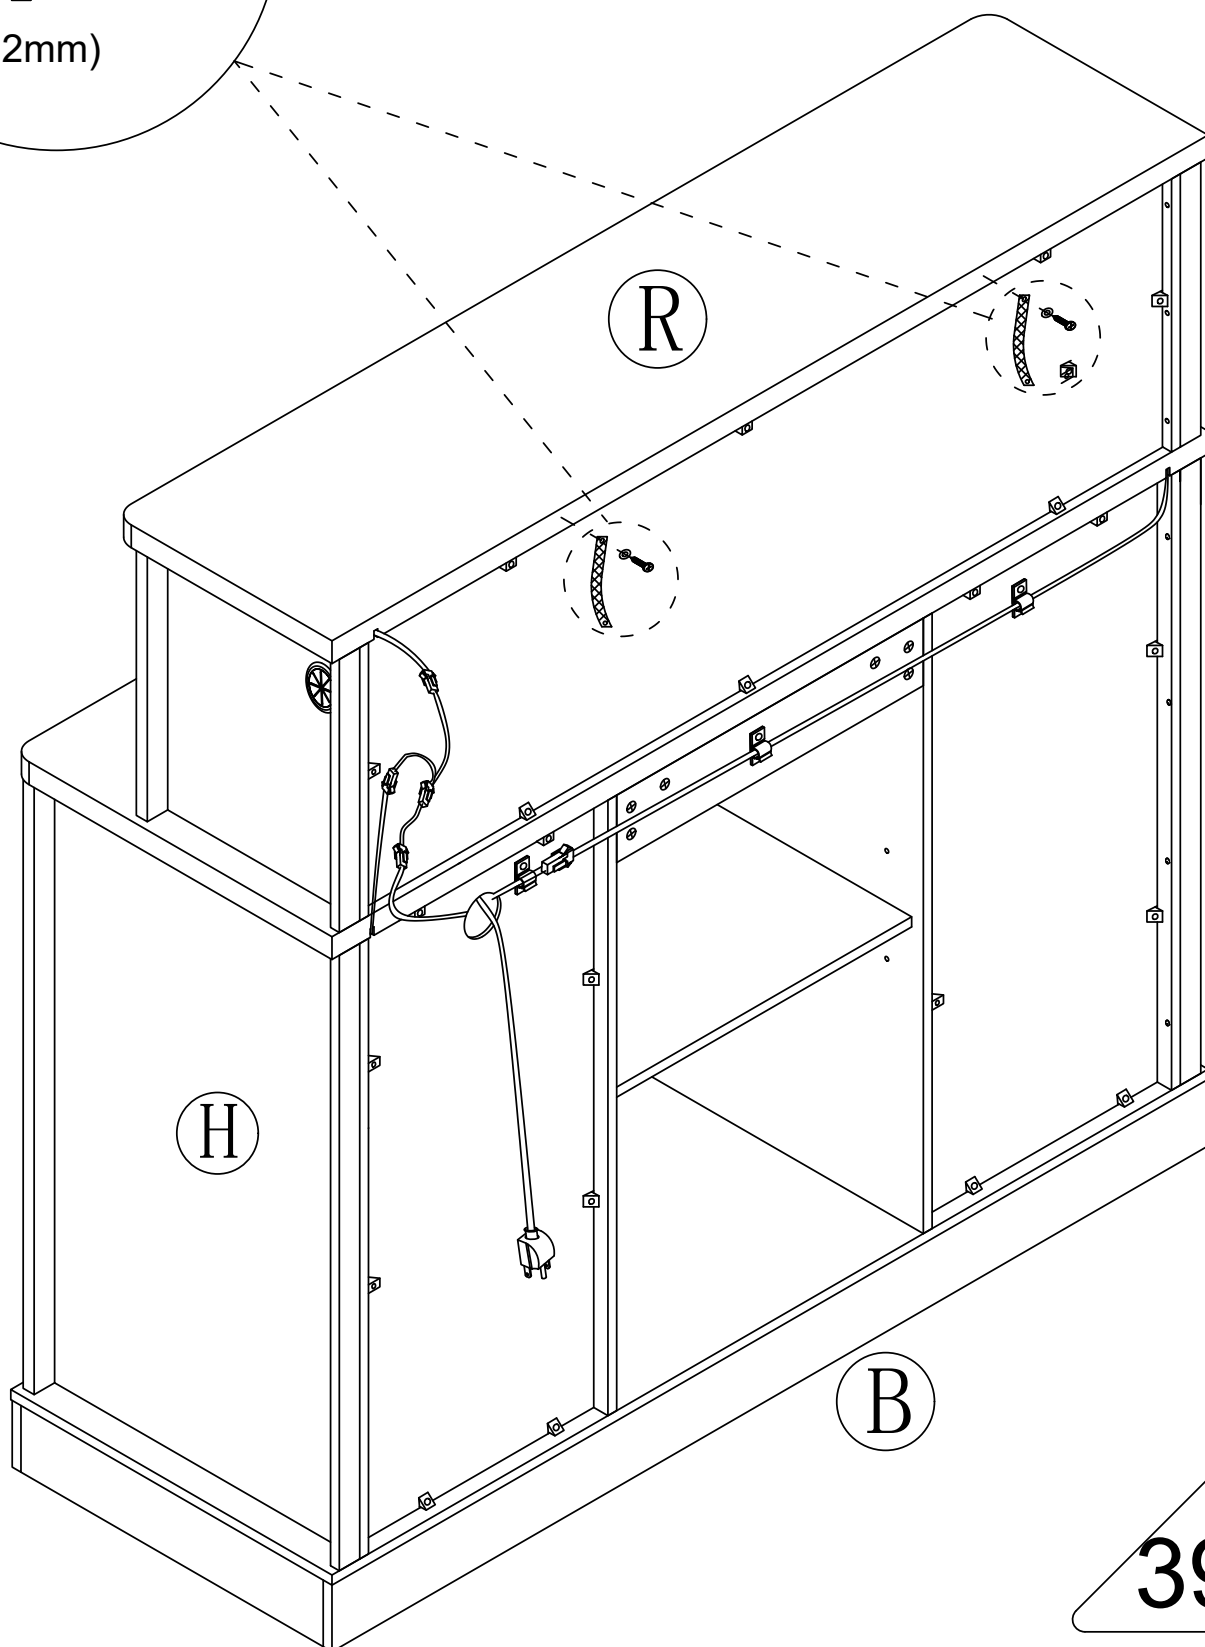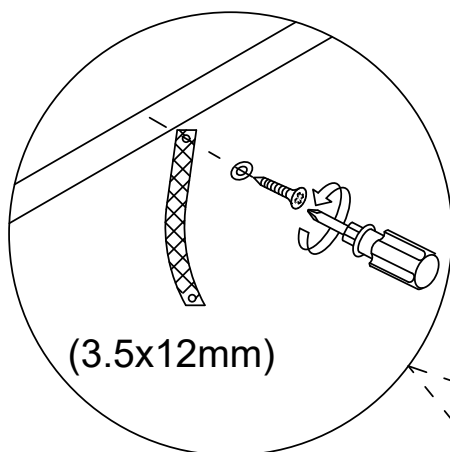


Step 50

use a ruler to measure the approximate height of the product on the wall, and then mark it with a pencil.

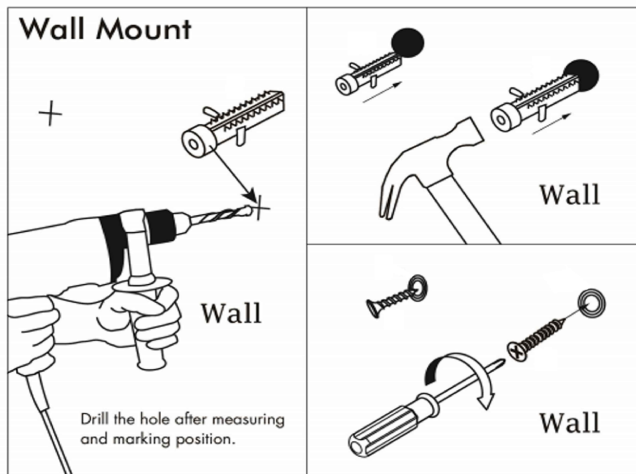



Use a tape drill to make holes in the wall that are suitable for the product screws.

14




Put the expansion bolt into the hole.


Pass the matching screws through the "anti-rewind" and tighten them to fix them on the wall.

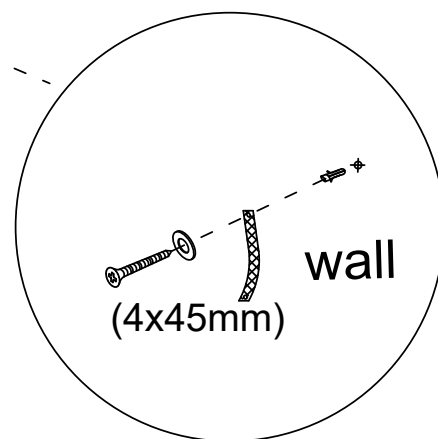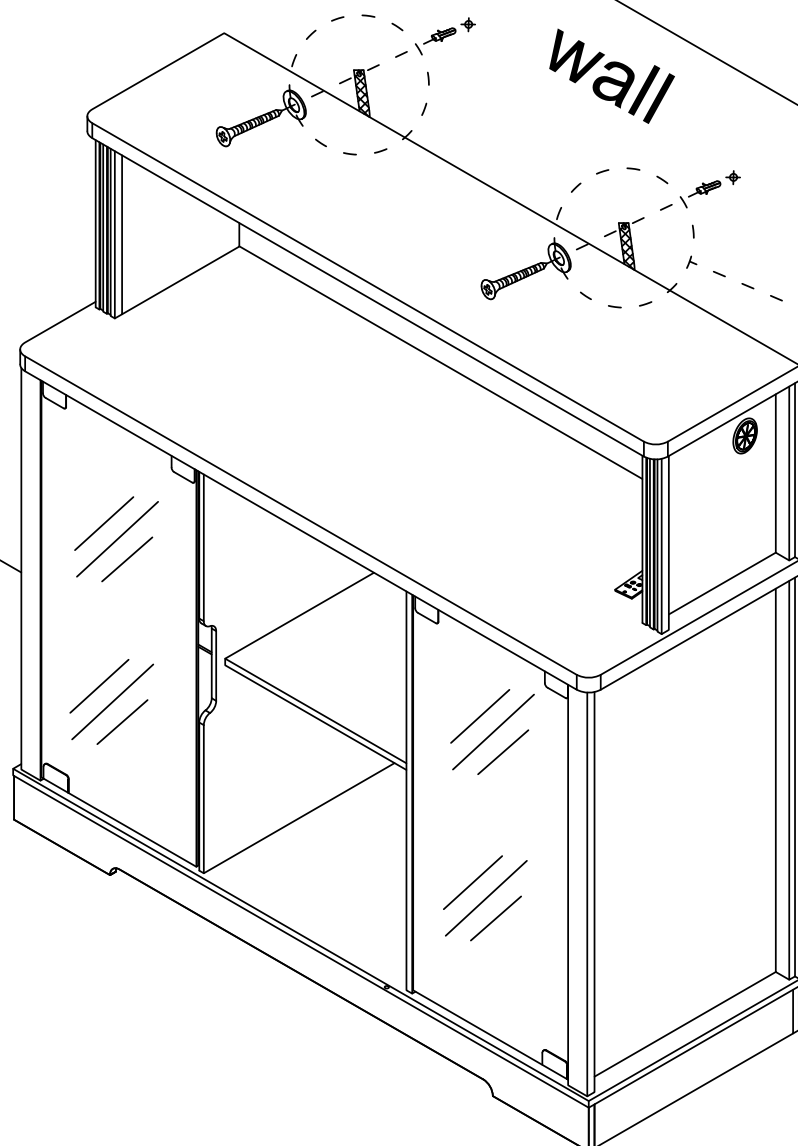

Step 51

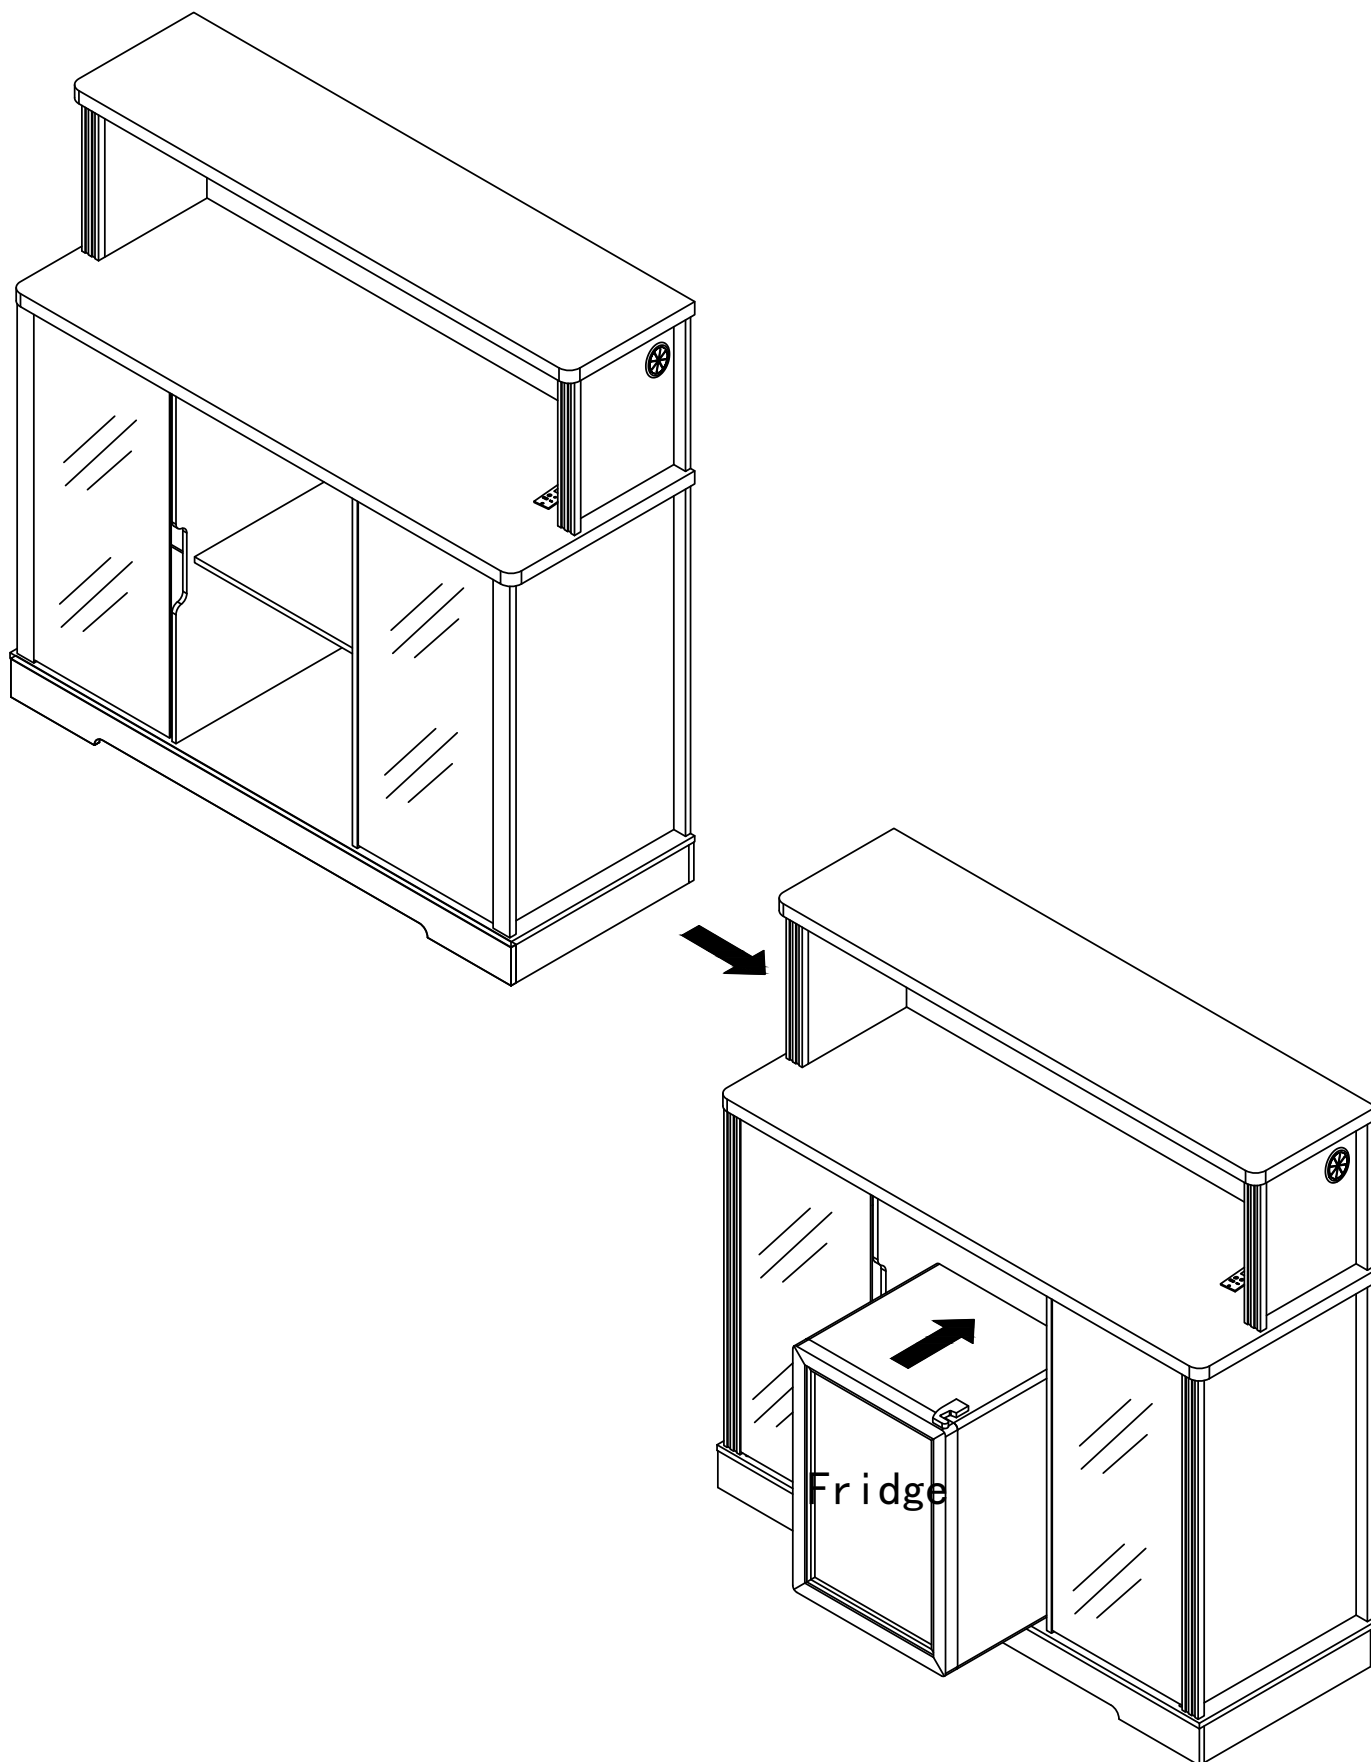


NOTE: You can remove the activity shelf and place the refrigerator at this position.

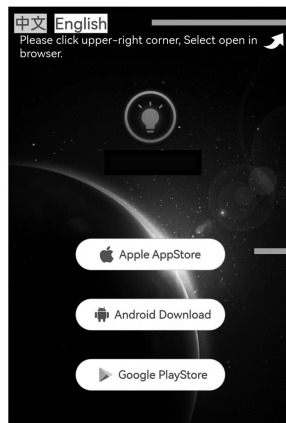


Select English Language

Select the corresponding device to download.
Note: If the download fails,
please turn off the "Enhanced Protection"
in the Pure Mode settings of the device.

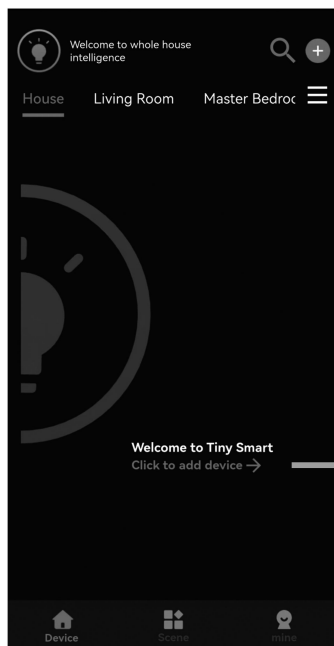


1

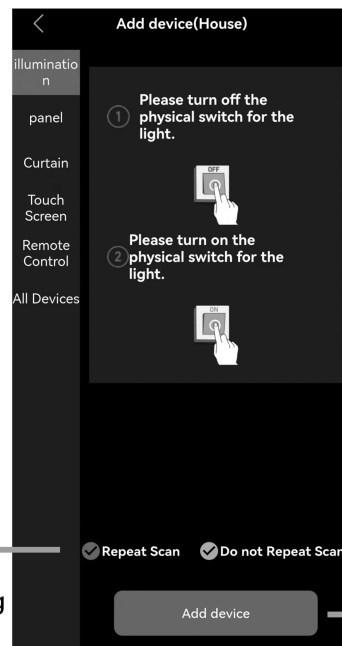

2

It turns blue after clicking

3

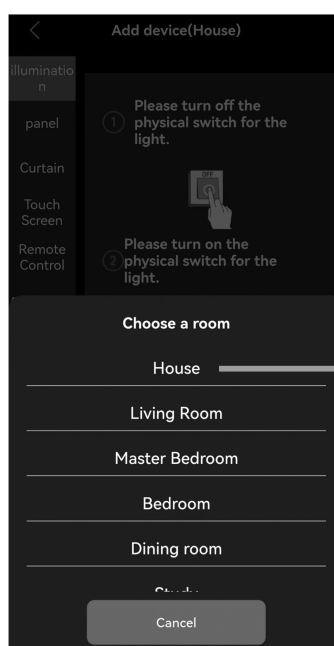


4



5

Unplug the smart box

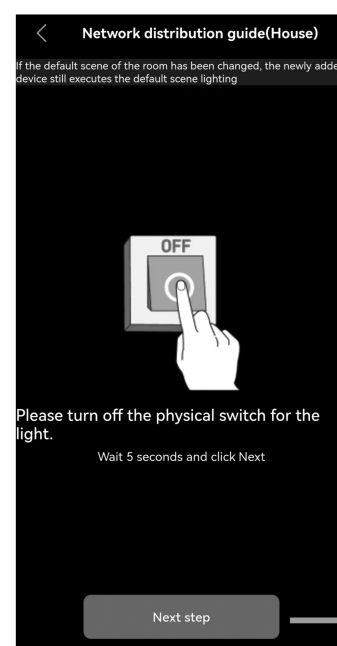


6


⑦ Plug in the smart box power plug.




The appearance of this program icon indicates that the matching is complete

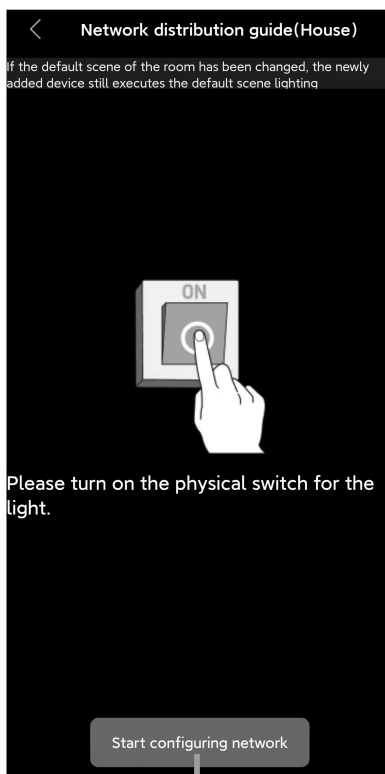


⑧

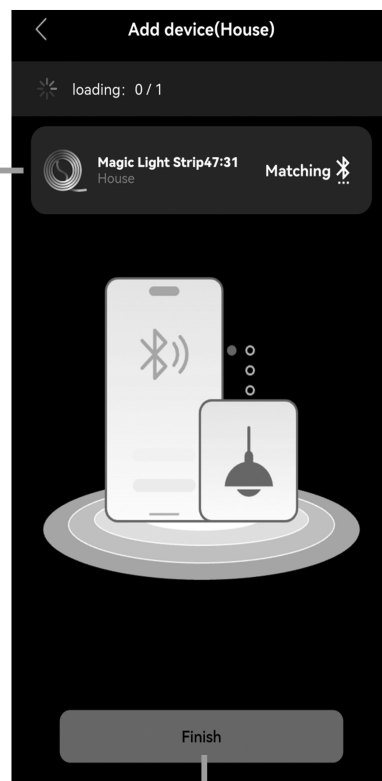

⑨

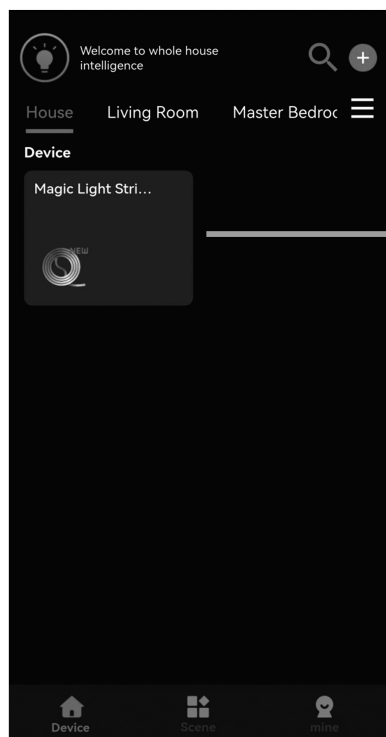

⑩

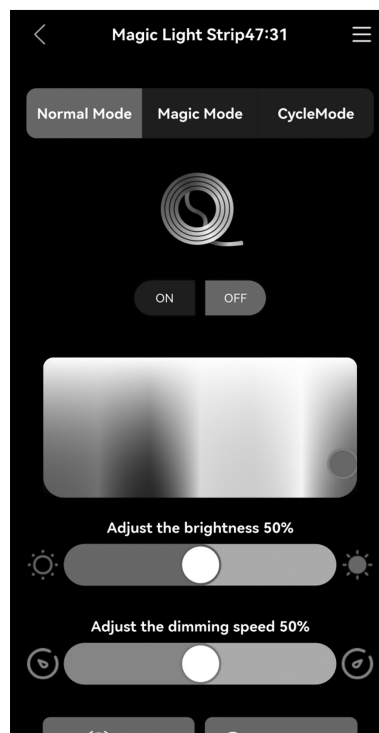

Now you can freely adjust the lighting according to your preferences



User's Guide

Thank you for purchasing this product.

To use this product, please connect it to a power source.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller.

It has 1 USB output port 1 Type-c port, and 2 socket outlets.

With 2 touch buttons, it can and turn ON/OFF the induction function, turn ON/OFF the light, adjust the light luminance, and change light colors.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation



This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights.


- i. Single Click: Turn the light on/off.
- ii. Quick Double-Click: Switch between 7 static RGB colors.
- iii. Long Press (2+ seconds): Adjust the light luminance.



This touch button is used to switch dynamic phantom colors and turn ON/OFF the induction function.

- i. Single Click: Switch to Phantom Mode, with 5 magical color transformations available.
- ii. Human Body Sensing Control: Long Press (3+ seconds): Turn on The key press indicator light is on.)
Long Press (3+ seconds): Turn off (The key press indicator light is off.)

By default, the human body sensing is enabled upon initial power-on, and the indicator light is on.

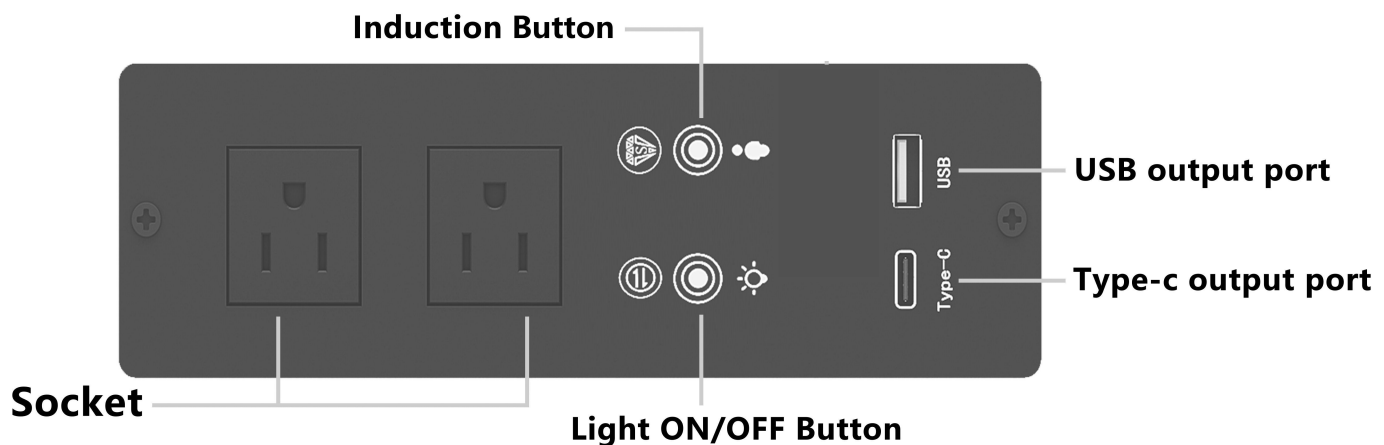

⚠ ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.