Assembly Instructions


Caution : You must read this before you proceed

Care & Maintenance






- Not for commercial use. For residential use only.
- Furniture may scratch floors. We recommend using furniture pads to protect your floors.
- Do not put hot items directly on furniture surface.
- Do not clean furniture with harsh cleansers or polish.
- Do not place furniture under direct sunlight.
- Do not place furniture near heating or cooling vents.
- Do not write on furniture without a padded barrier to protect the surface.
- Do not place furniture outside. For indoor use only.
- Stains may be removed with mild soap solution and damp cloth.
- Children should not climb or jump on the furniture.
- Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in carton for hardware packs and legs.
Sets often ship in multiple boxes and may arrive a day or two apart.


BAR STOOL
N775P506033

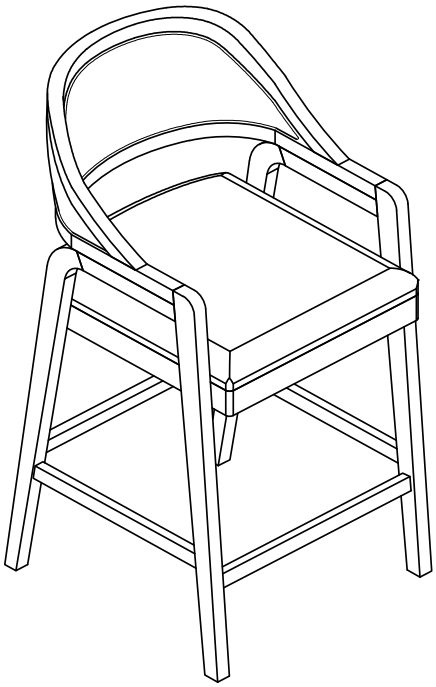


Parts List

Label	Picture	Description	QTY
A		Backrest Frame	1
B		Seat Frame	1
C		Left Leg Frame	1
D		Right Leg Frame	1
E		Stretcher	2

Hardware


Label	Picture	Description	QTY
①		Bolt (5/16" x 40mm)	12+1
②		Lock Washer/(5/16x11mm)	12+1
③		Flat Washer/(5/16x19mm)	12+1
④		Allen Wrench	1
⑤		Screws (4x38mm)	4+1




Phillips screwdriver (not included)

Assembly preparation


Before beginning assembly:




A




B



C



D



E



①x13




②x13



③x13



④x1




⑤x5

- Read instructions, cover to cover-
- Have 2 adults on hand for assembly-
- Do not assemble on flooring of carpet-
- Assemble on a clean non-marring suface (packing foam)-
- Save all packaging until finished-


Assembly steps

Overview

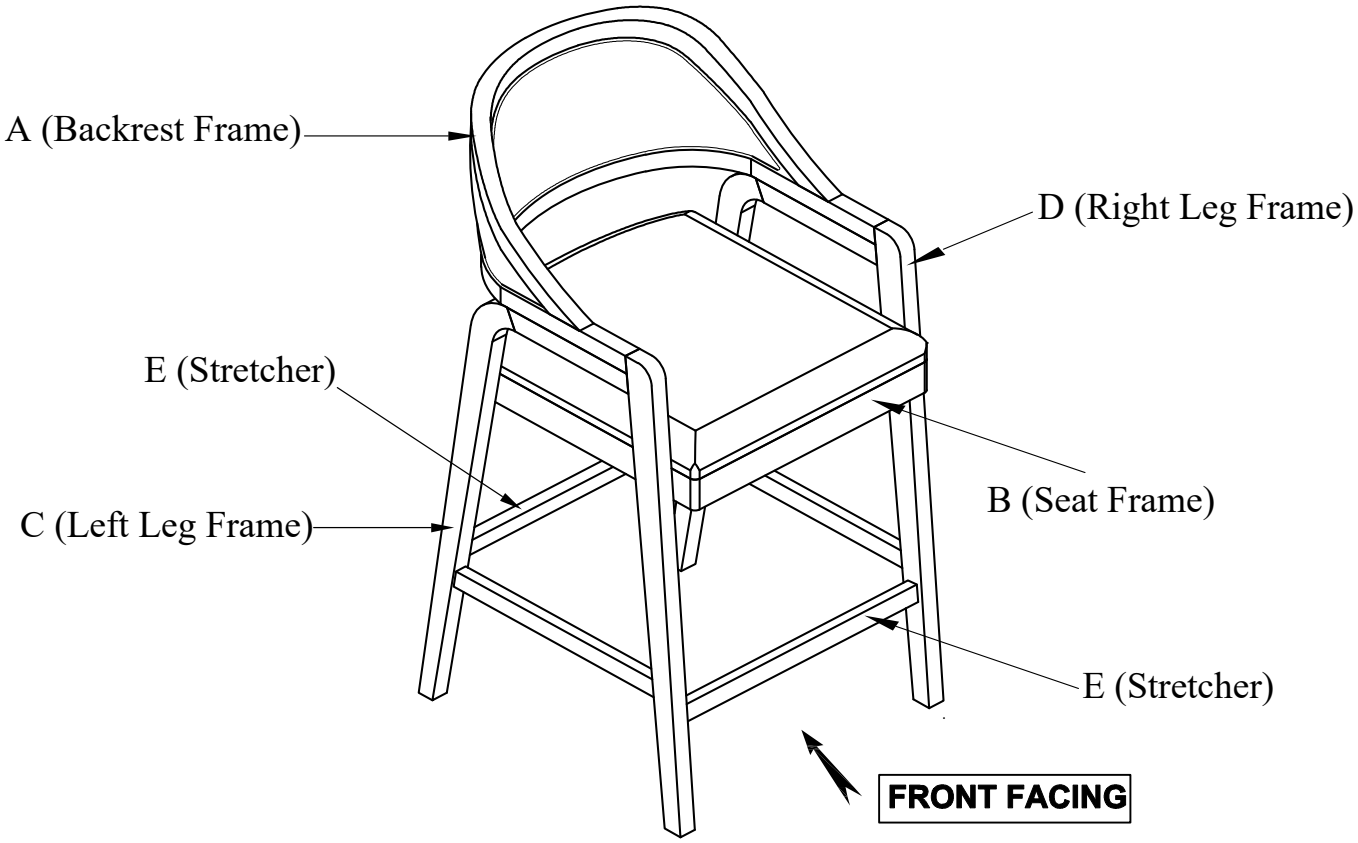

This bar stool has multiple parts and may require up to 30 minutes to assemble. To give you an overview of the bar stool parts, the above picture is provided to help you put the various parts into perspective. Please read through the instructions below to familiarize yourself with the parts and steps before assembly.


Step 1

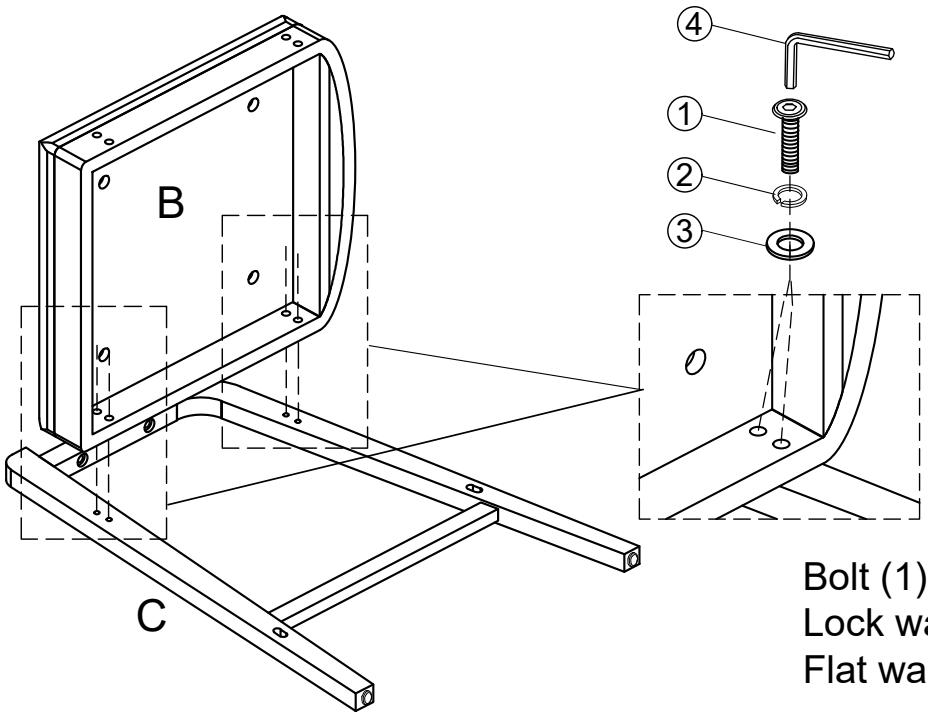

Bolt (1) 4pcs
Lock washer (2) 4pcs
Flat washer (3) 4pcs

Attach seat frame (B) into the left leg frame (C). Using bolts (1), lock washer (2), and flat washer (3) and allen wrench (4). Do not full tighten the bolts.


Step 2

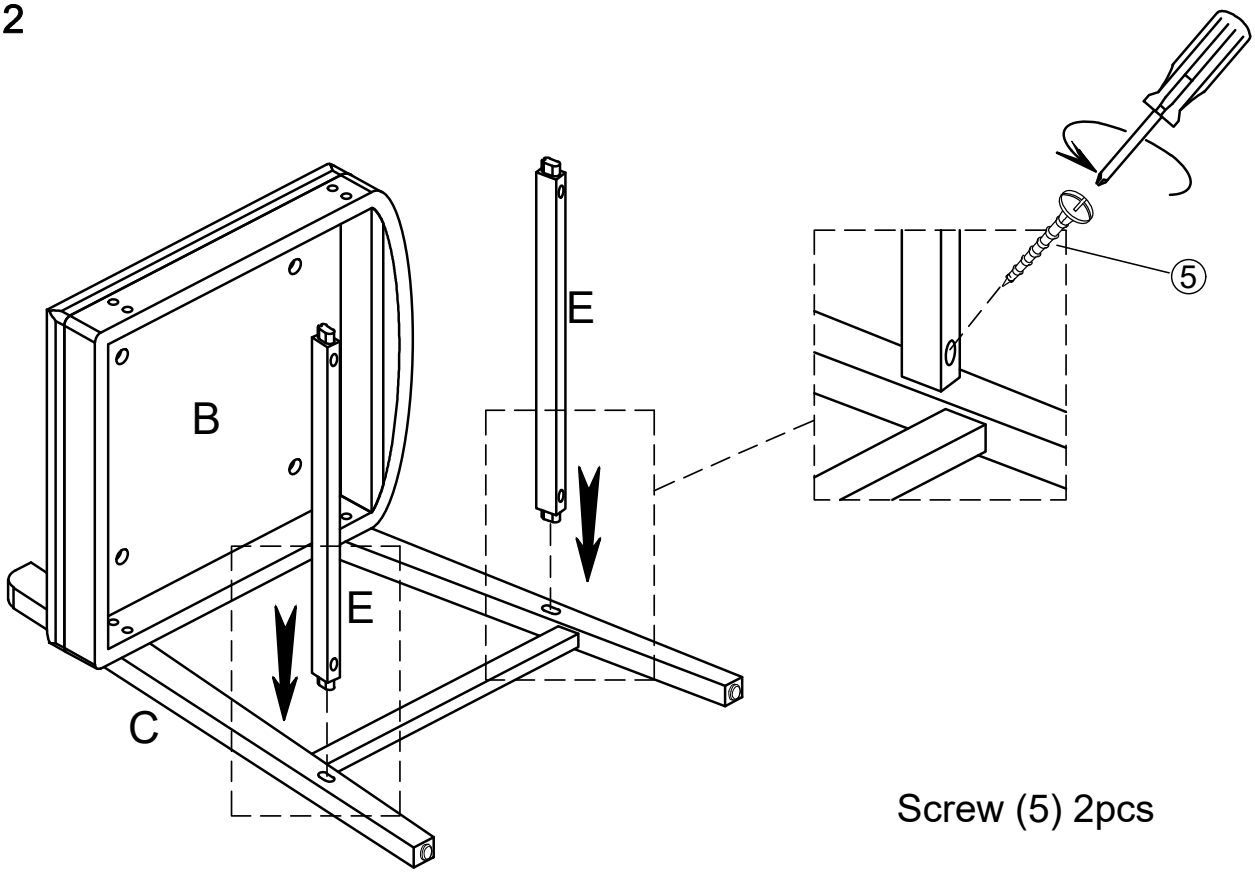

Screw (5) 2pcs

Attach stretcher (E) into the left leg frame (C). Using screws (5), phillips screwdriver (not included).


Step 3

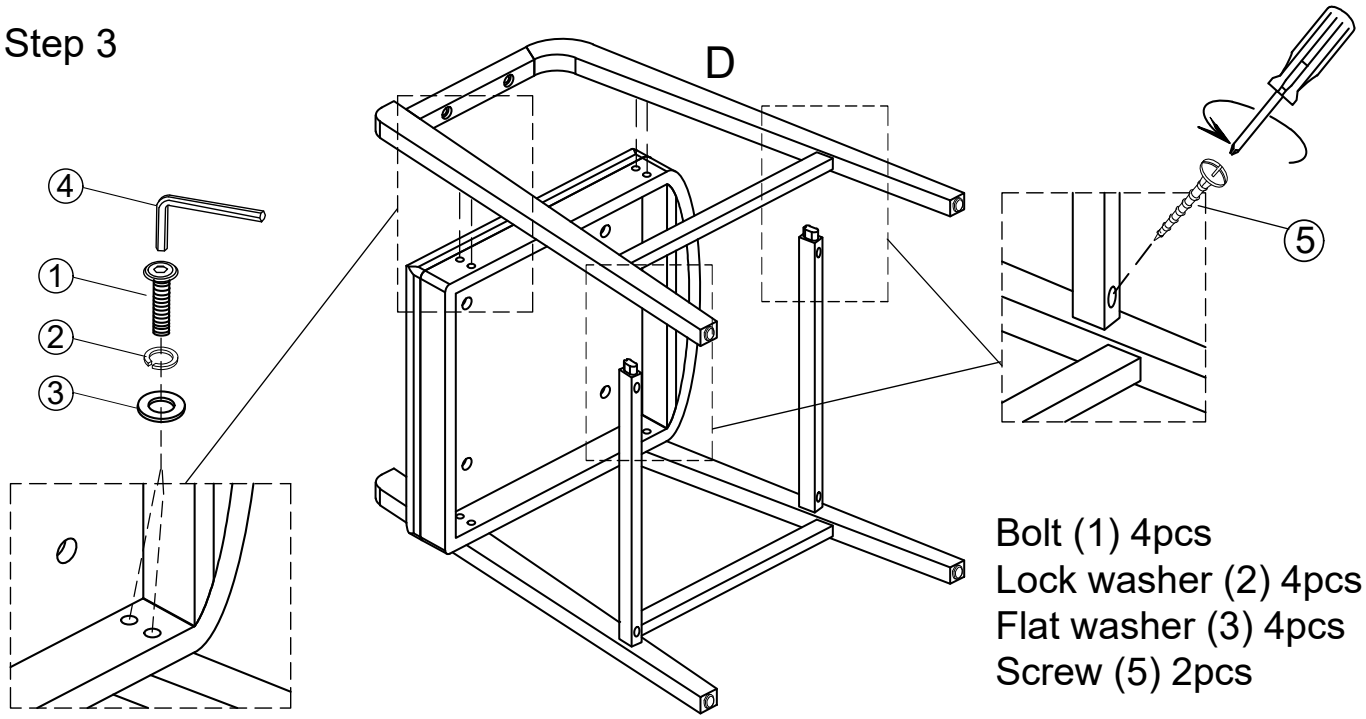

Bolt (1) 4pcs
Lock washer (2) 4pcs
Flat washer (3) 4pcs
Screw (5) 2pcs

Attach right leg frame (D) into the bar stool of Step 2. Using bolts (1), lock washer (2), and flat washer (3) and allen wrench (4) and screws (5), phillips screwdriver (not included). Do not full tighten the bolts.


Step 4

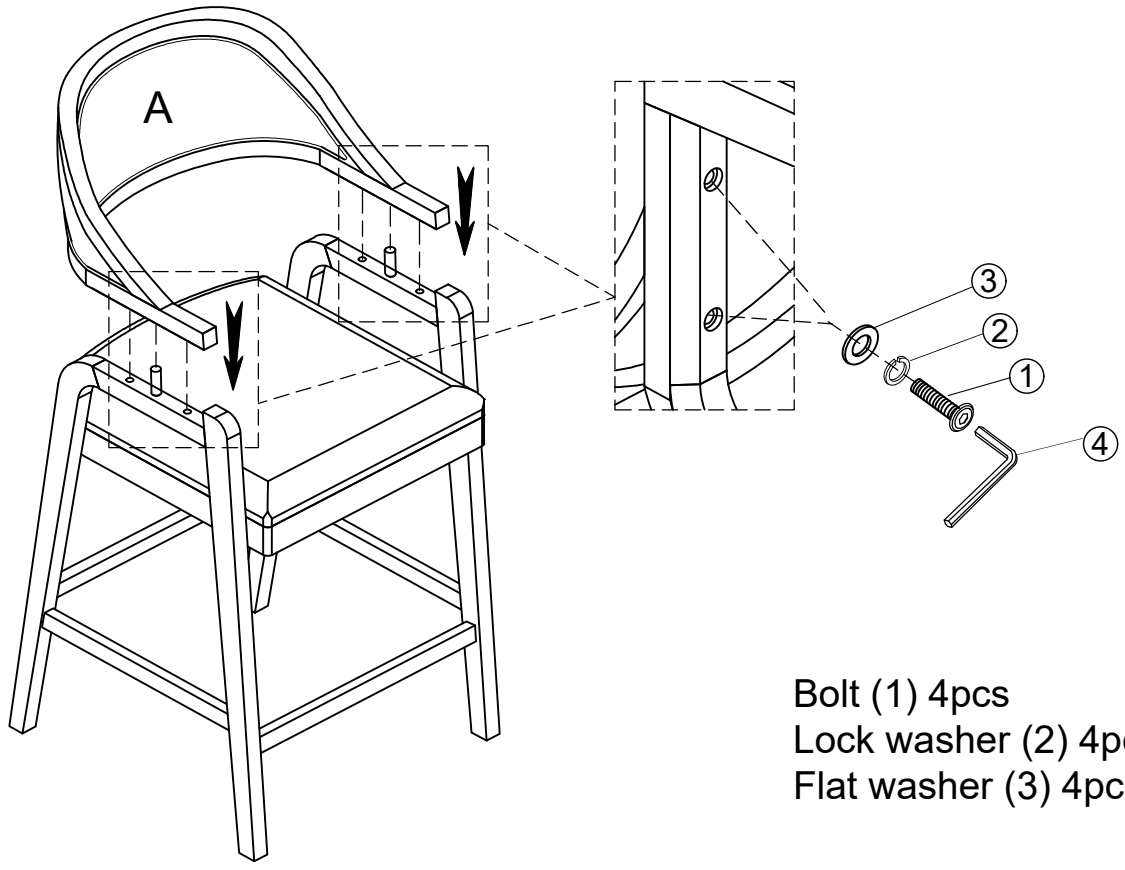


Bolt (1) 4pcs
Lock washer (2) 4pcs
Flat washer (3) 4pcs

Attach backrest frame (A) into the bar stool of step 3. Using bolts (1), lock washer (2), and flat washer (3) and allen wrench (4). Tighten all the bolts.

Step 5

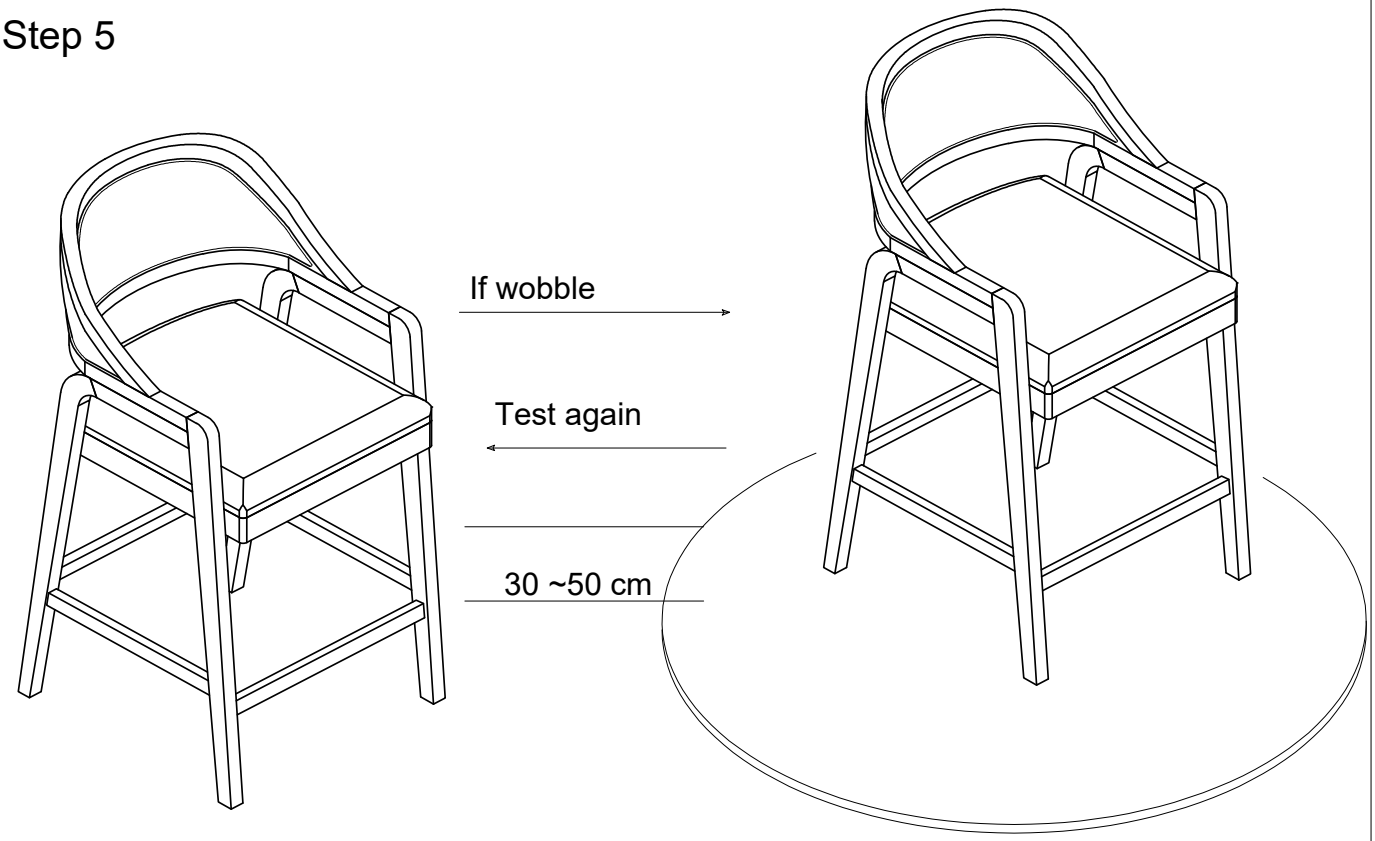

Place the bar stool on a LEVEL SURFACE to check for wobbles.
If it wobbles, lift the bar stool to some 30cm to 50cm in height from the ground.
Keep your feet and toes well away from the drop zone.
drop the bar stool freely and vertically with the four legs, hitting the ground, all at the same time.
This drop test will help to ensure that all the bolts and gaps all reach full alignment status.
Test again for evenness on a LEVEL SURFACE.
If no wobbles are found, slowly and steadily turn the bar stool upside down.
Then, proceed to tighten all bolts in a sequential manner.
CAUTION: When tightening these bolts, tighten sequentially.
DO NOT tighten any screw fully and then towards the next one.
This would cause the frame to warp.
If there is still wobbles, loosen the bolts and execute these same drop tests.
WARNING!! IF BAR STOOL CHAIR IS NOT STABLE, IT COULD LEAD TO DAMAGING THE PRODUCT.

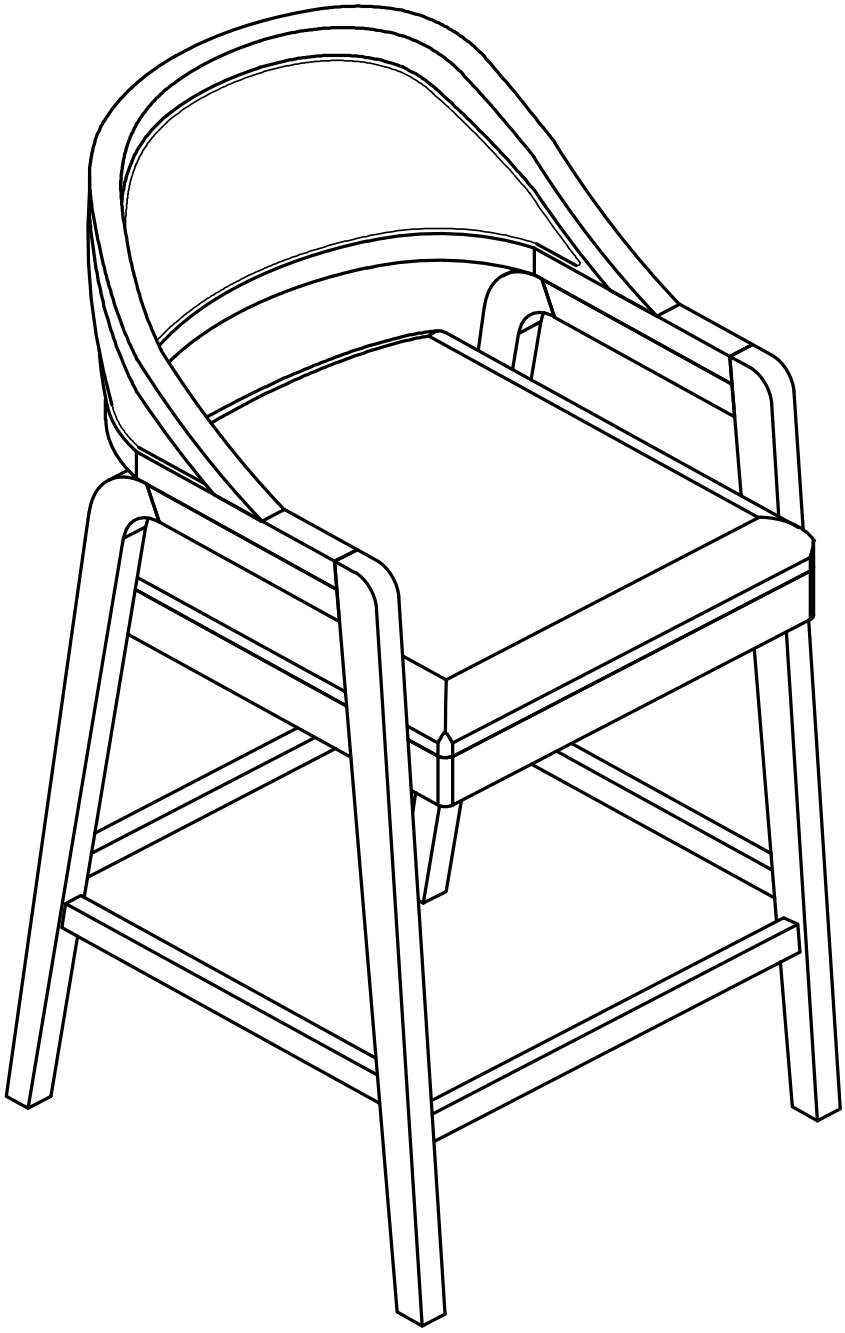

Your bar stool is ready for use .
This bar stool can only be used on a flat, level surface.