



SINGLE HANDLE FAUCET INSTRUCTION MANUAL

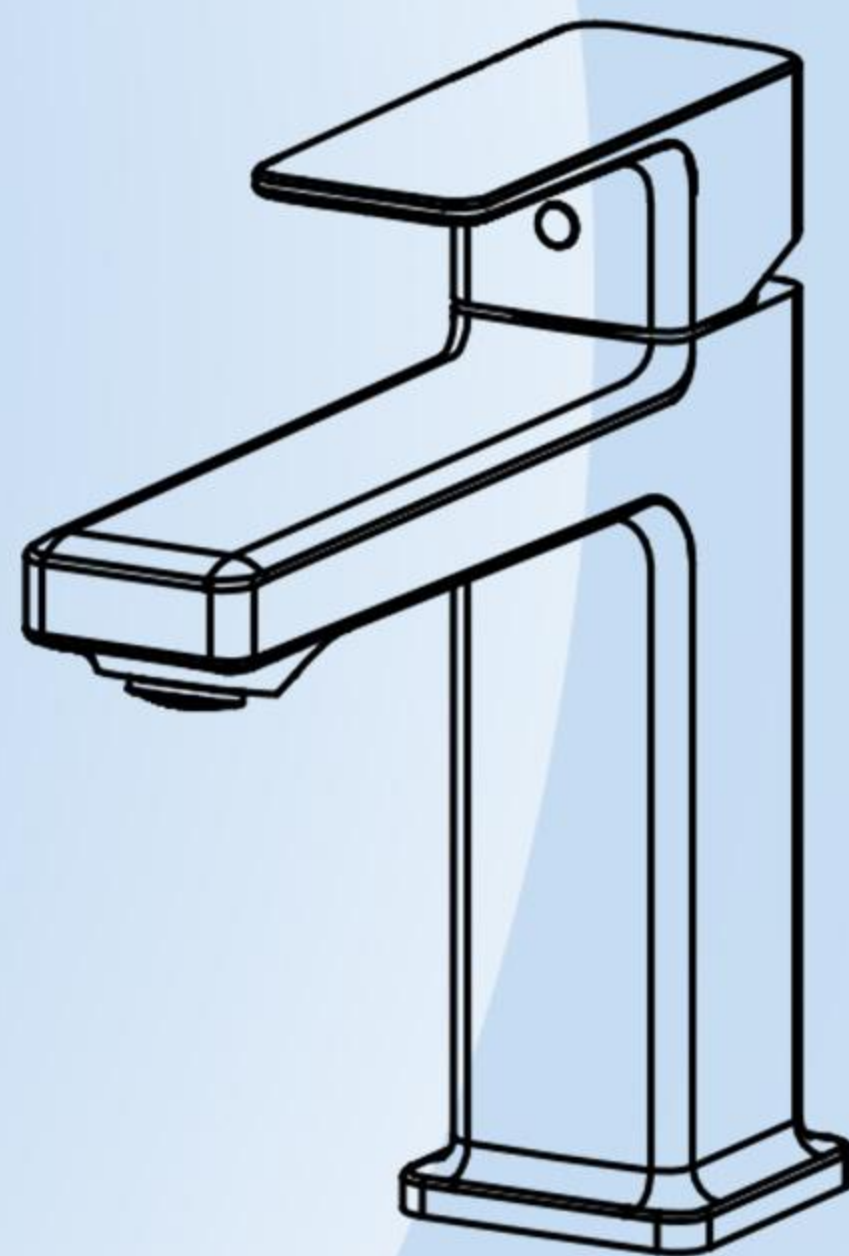

1 Installation Guidelines

1. After opening the product packaging, check the parts against the "Standard Parts List" to make sure that all parts are present. If any parts are missing, please contact your local dealer immediately.
2. The sink you purchase must be compatible with the basic installation dimensions of this product. just need to make sure the sink hole diameter size is 1.25"-1.37"/ 32-35 mm, max desk thickness: 1.57"/40mm.
3. The faucet cartridge in the main body has already been calibrated at the factory. Disassembly is not recommended.
4. The hot water pipe connection should be marked with a red label or ring, and the cold water pipe connection should be marked with a blue label or ring. If the hot and cold water pipe connections are reversed, the red and blue markings on the faucet handle will be opposite to the actual water temperature. Therefore, you should verify that the hot and cold water pipe connections are correct before turning on the water supply.
5. Before installing the faucet, flush the pre-embedded water pipes to remove any dirt or sediment to avoid clogging and ensure smooth water flow.
6. After installation, check all joints and connections for leaks.
7. Inlet water pressure requirements: 0.05MPa≤inlet water pressure≤0.75MPa (including cold water pressure).

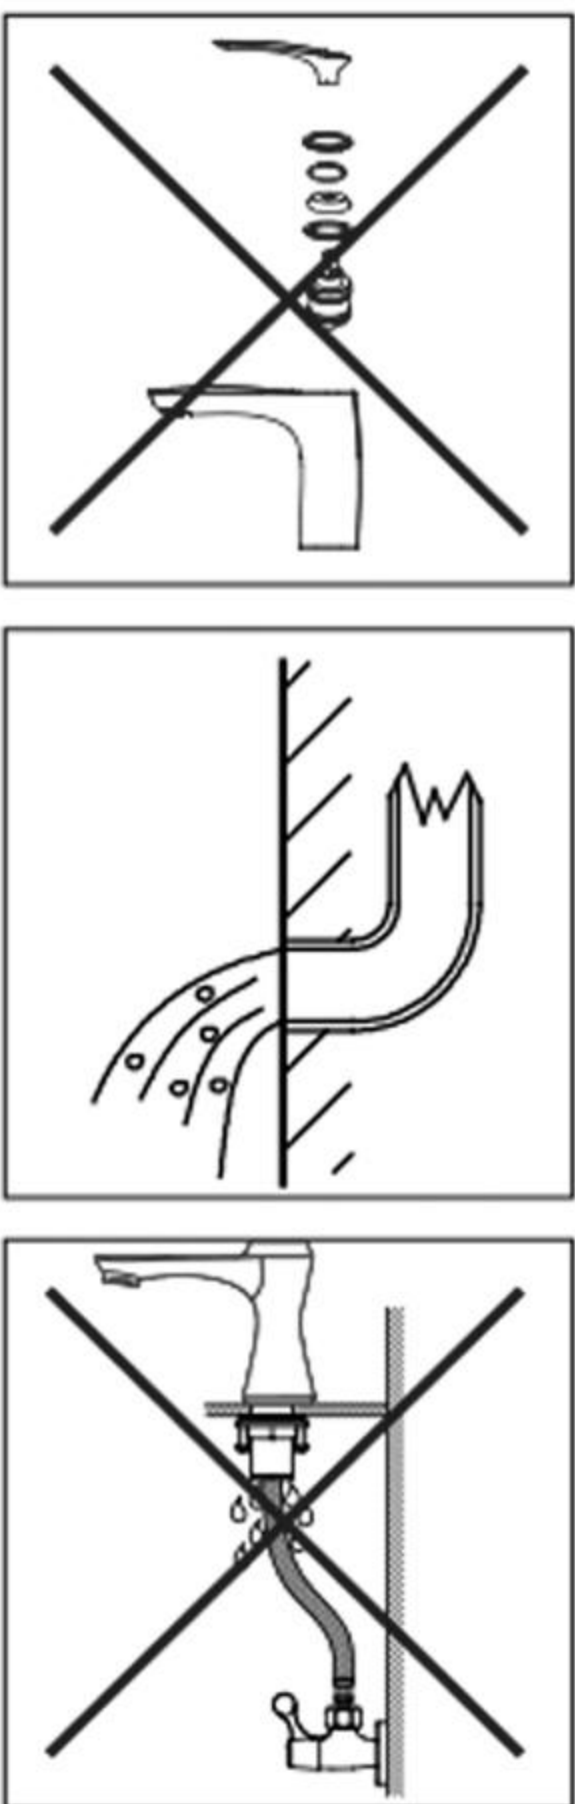

Kind Tips:

It is recommended to install the faucet after the house has been properly cleaned.
Suggestion: If the faucet is located in a highly corrosive environment, clean the faucet surface frequently to maintain its lifespan.


Recommended tools:



•Water sealant





•Allen key

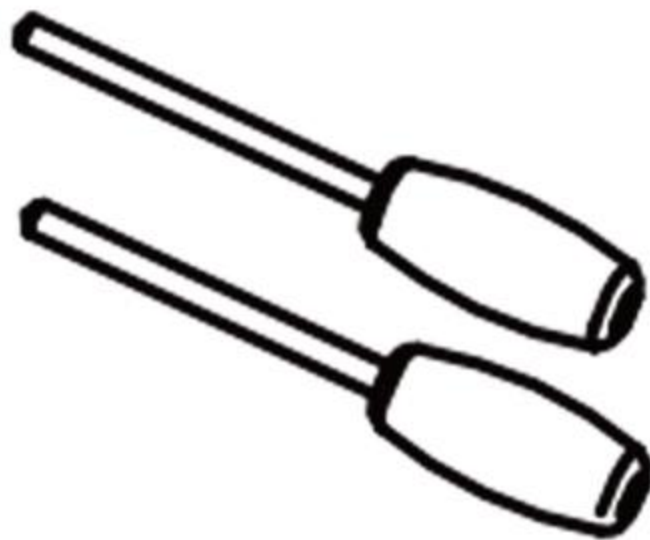

•Flat screwdriver
•Cross screwdriver


2 Dimension Diagram / Included Items

NO.	Part name	Quantity
01	Faucet Body	1
02	Gasket	1
03	Stainless Steel Gasket (b)	1
04	Nut	1
05	Inlet Water Hose (Hot,Cold)	2

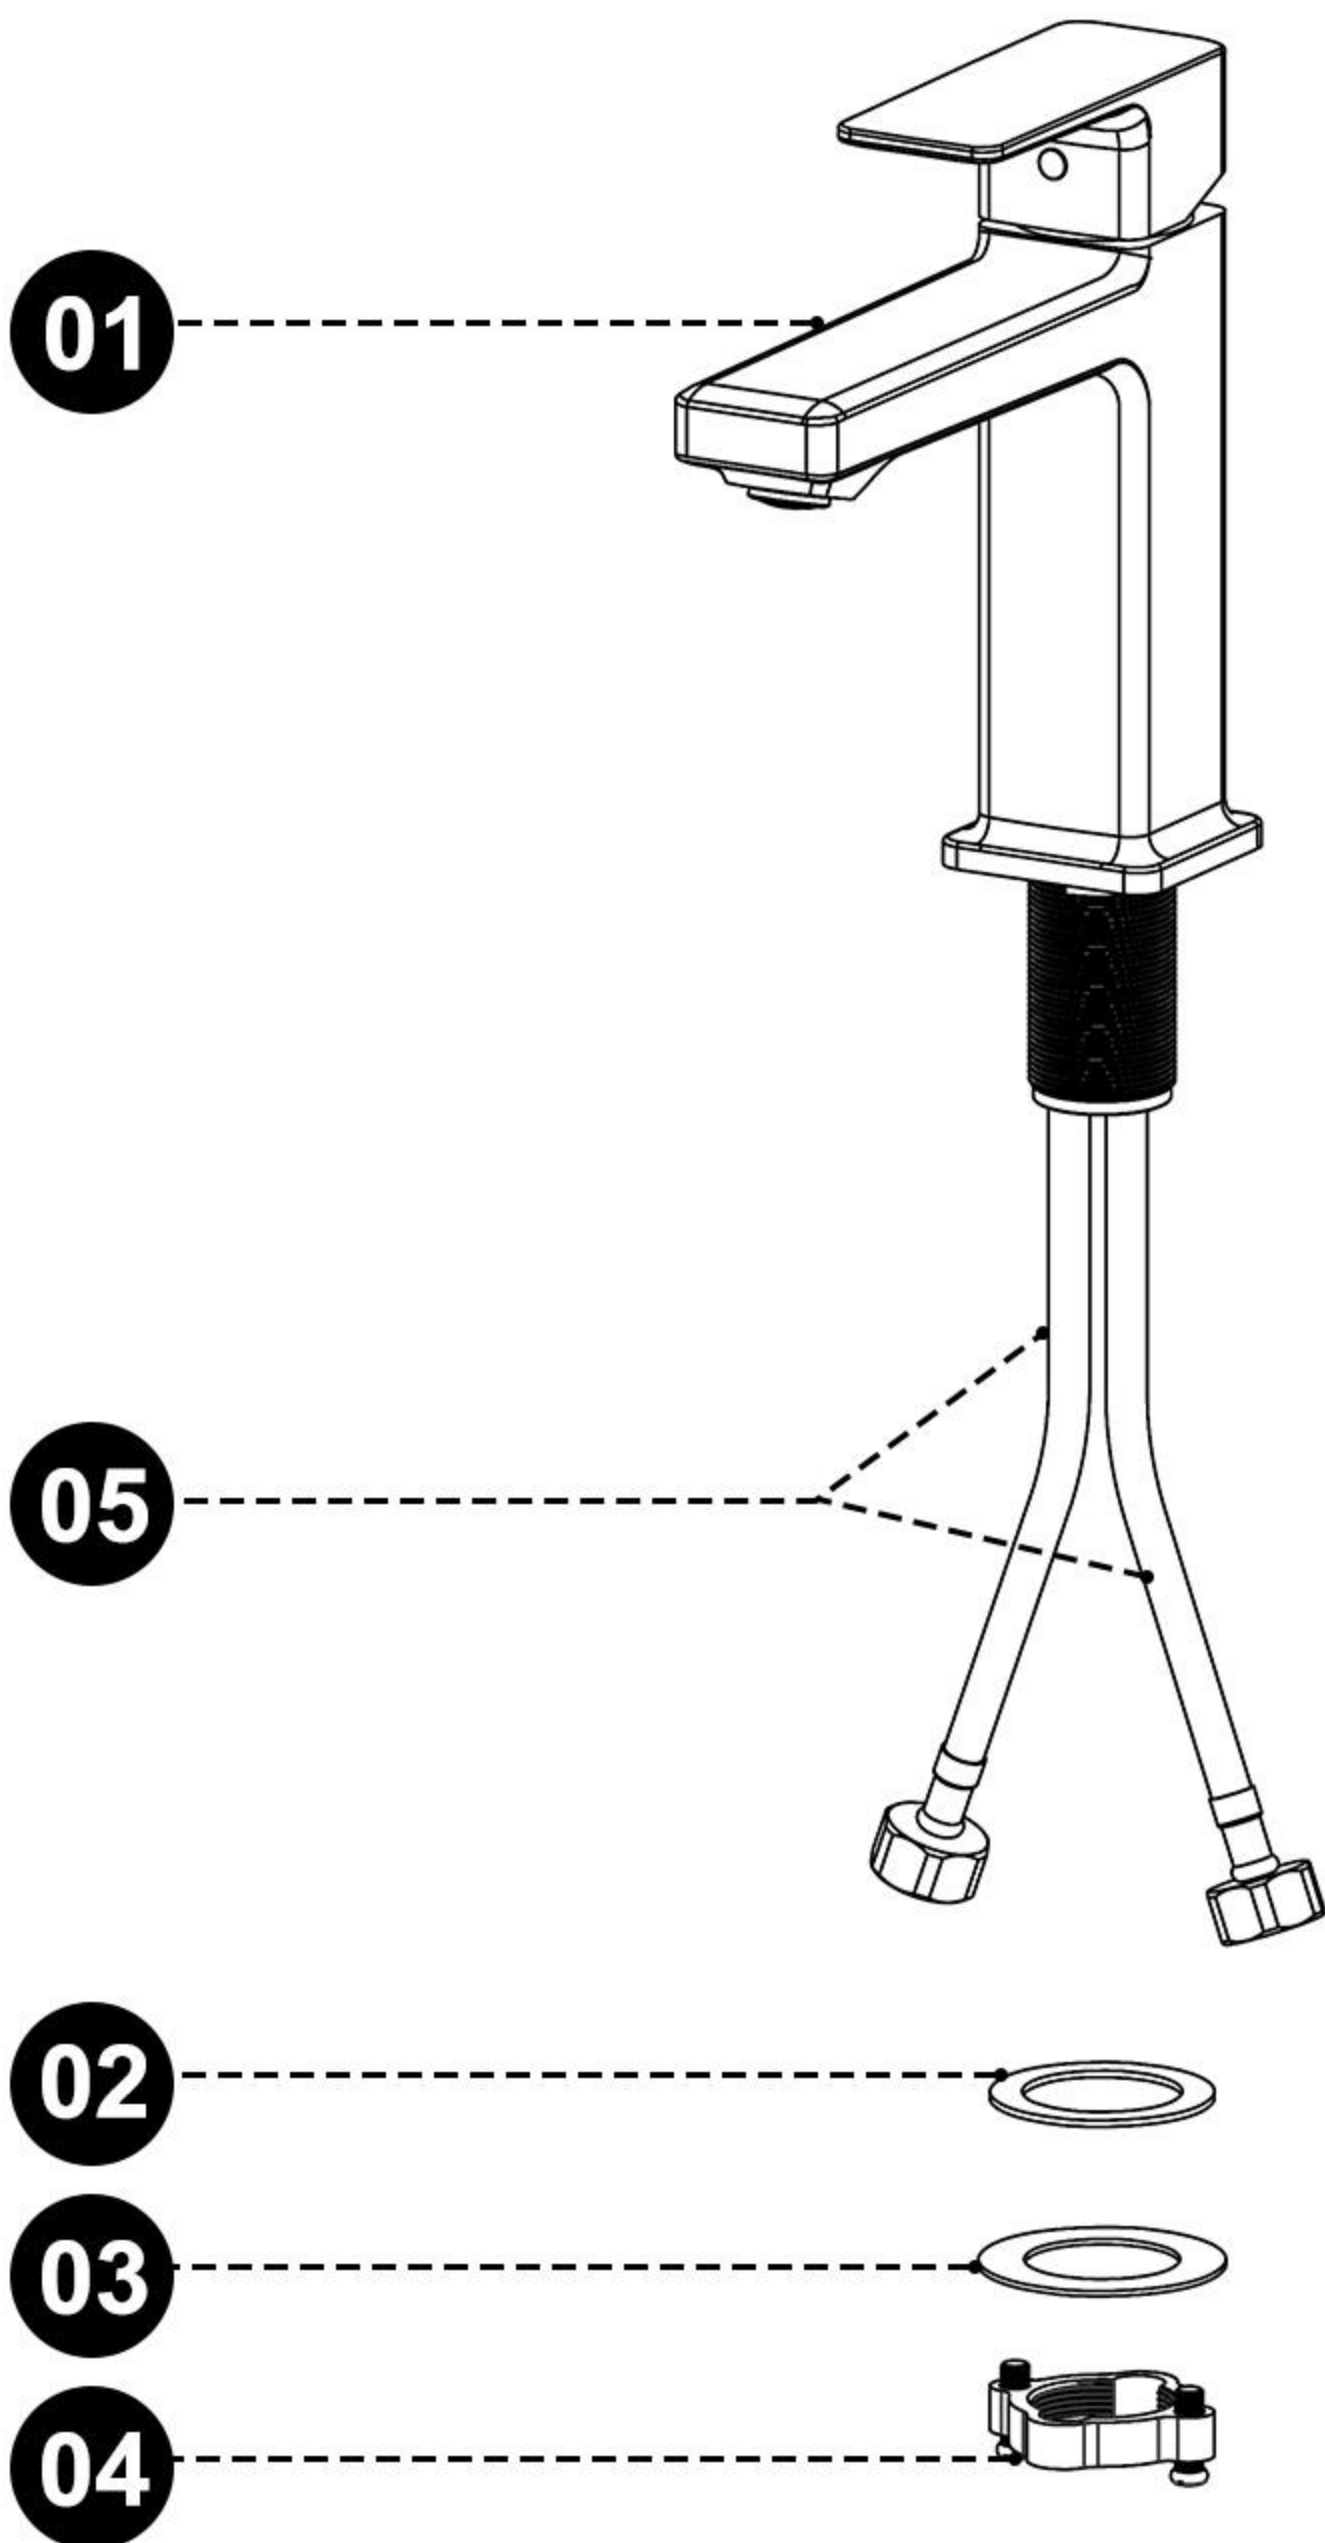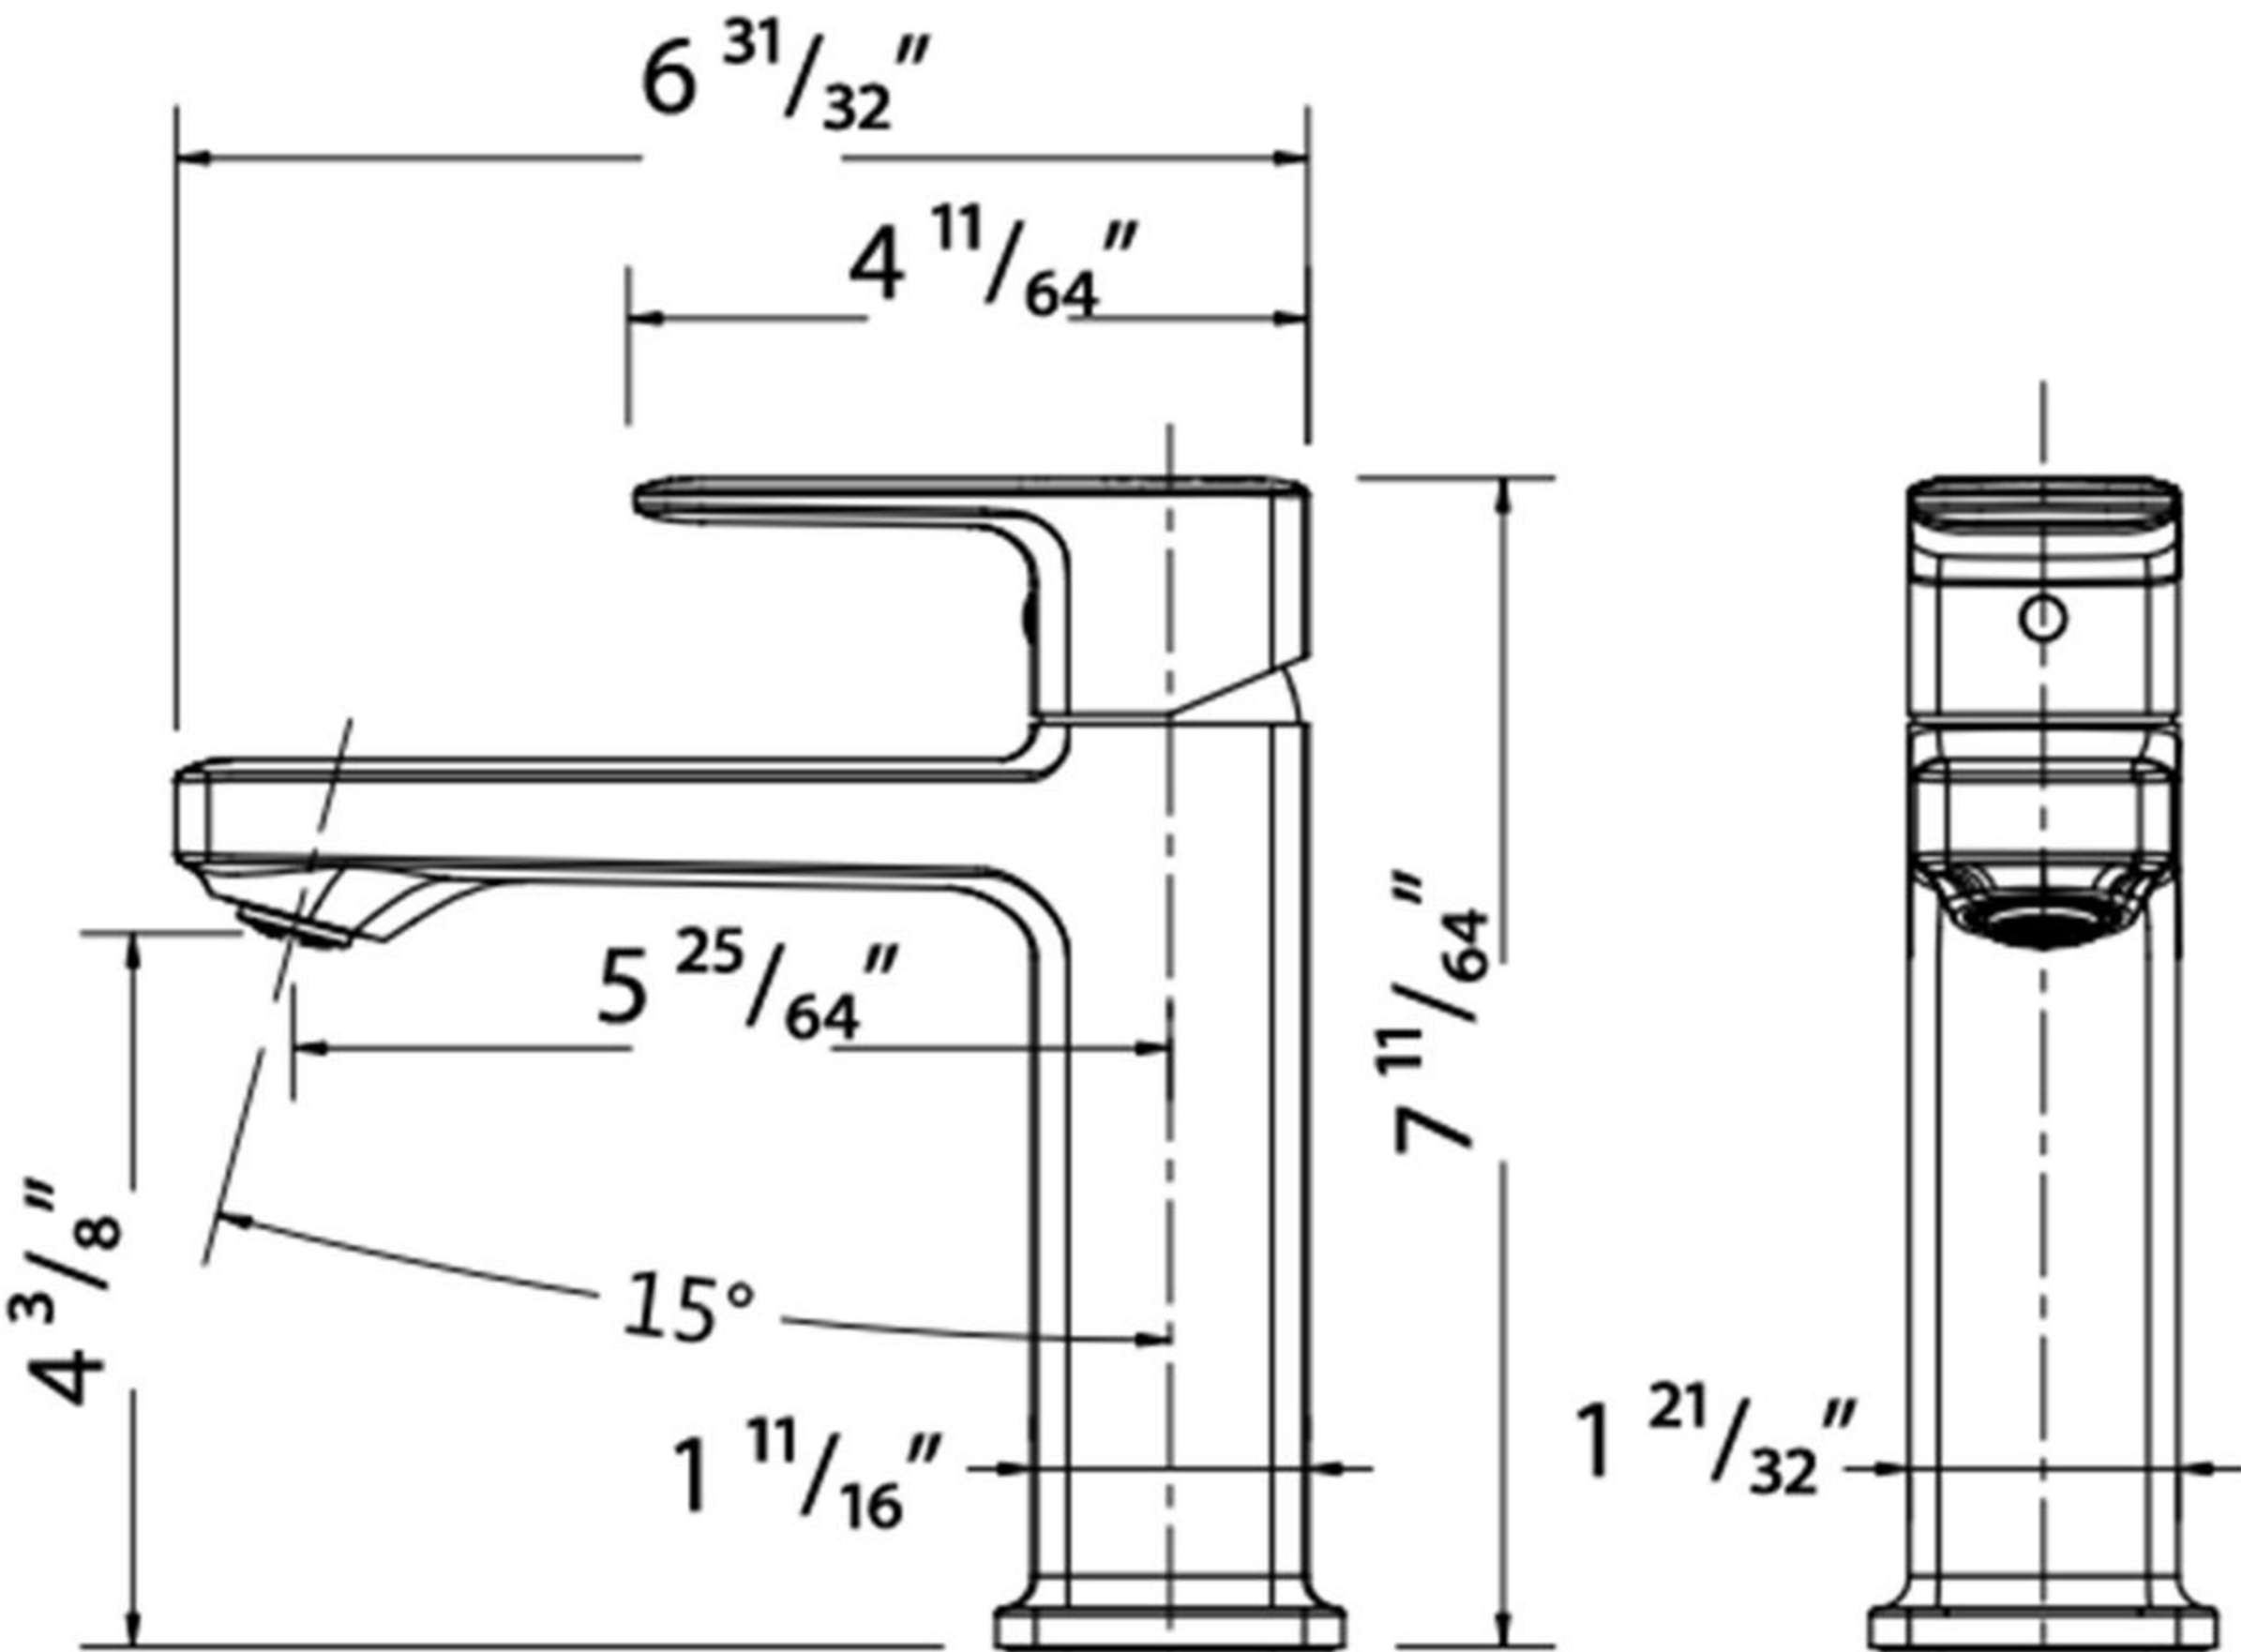


4 Installation Steps


1. Before installing the faucet, make sure there is a hole (φ35-φ40mm) in the table. Then clean up around the hole.

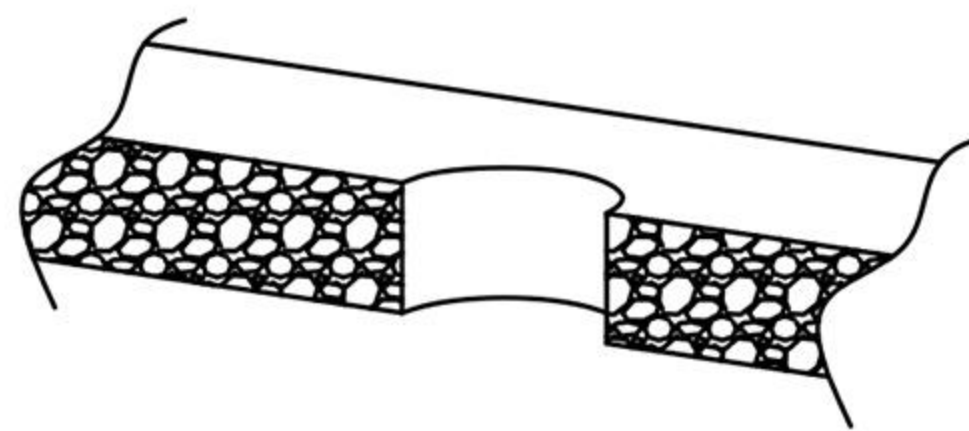


2. Install the body with the inlet tube into the hole.

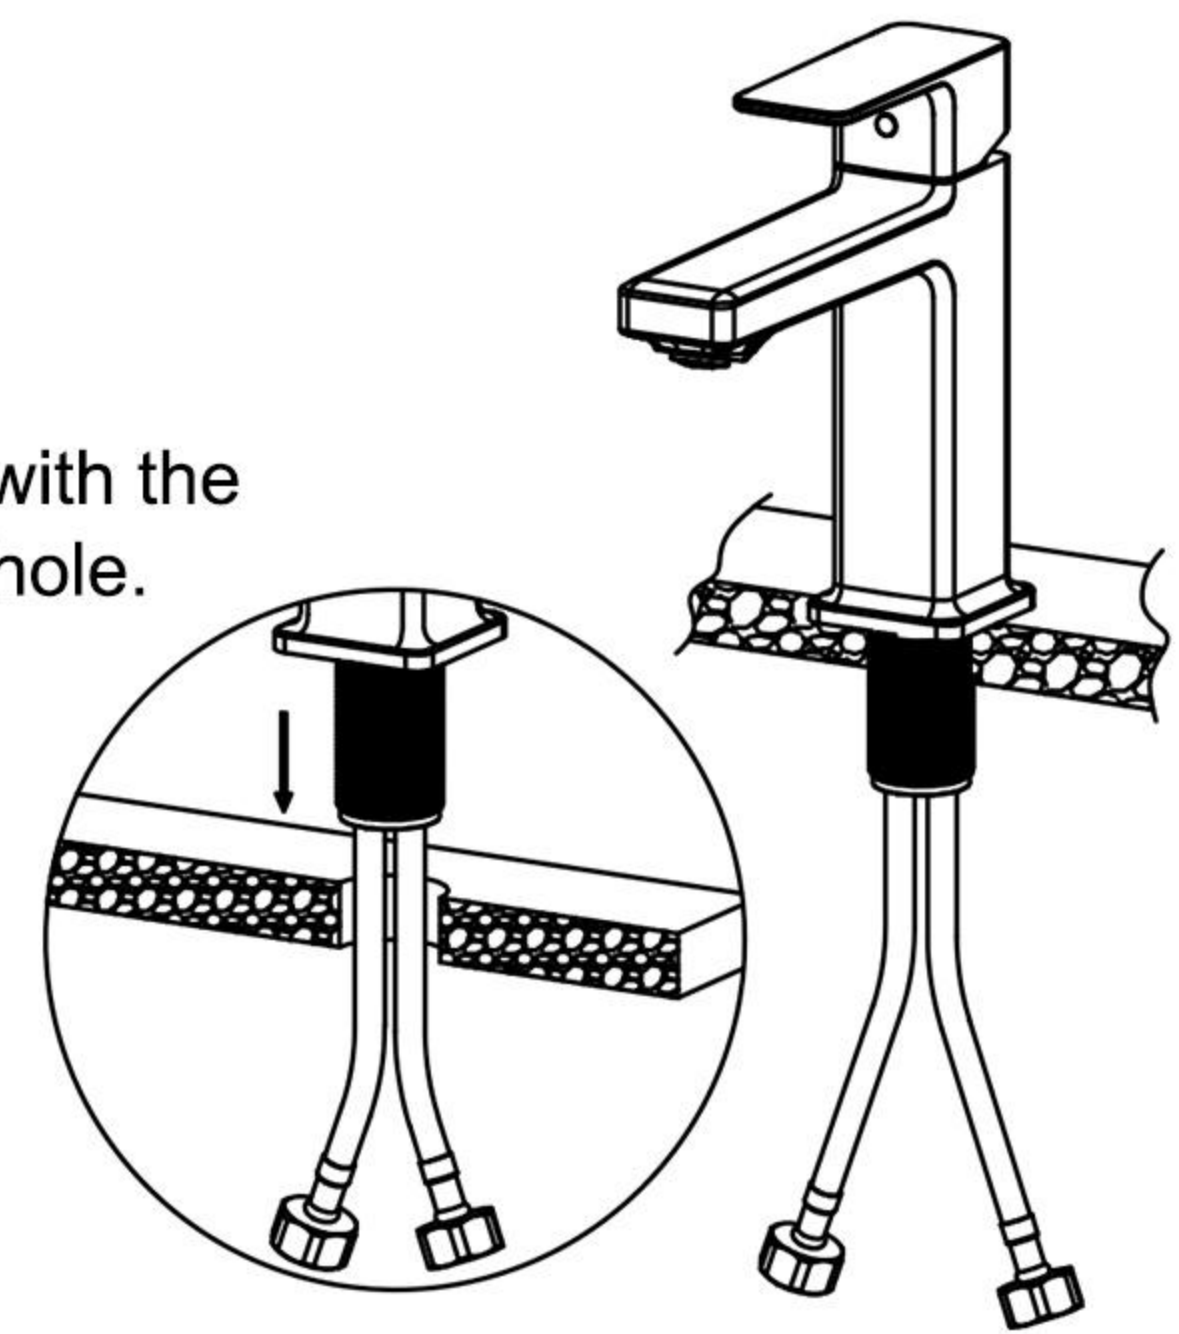

3. Link the nut with the pipe of body under the table. Use a screwdriver to tighten the screws.

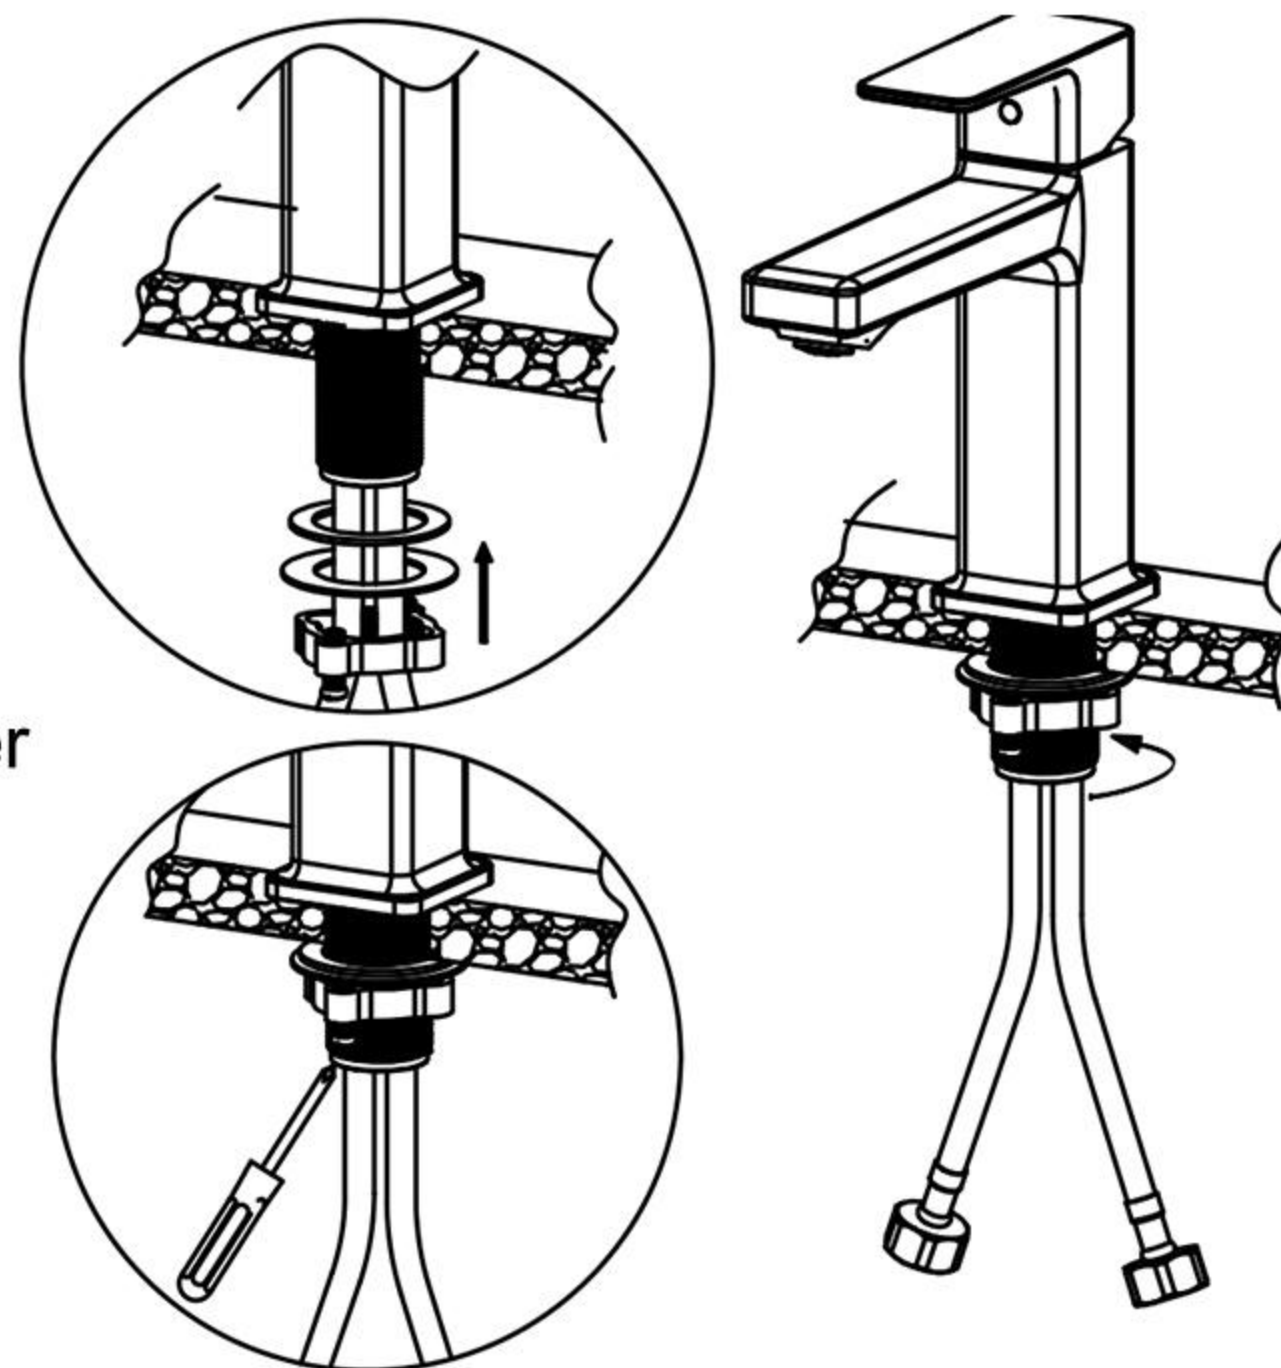

4. Link the inlet tubes of body with cartridges. The red one is for hot water and the blue one is for the cold water. Turn on the tap in order to check if it is working right.

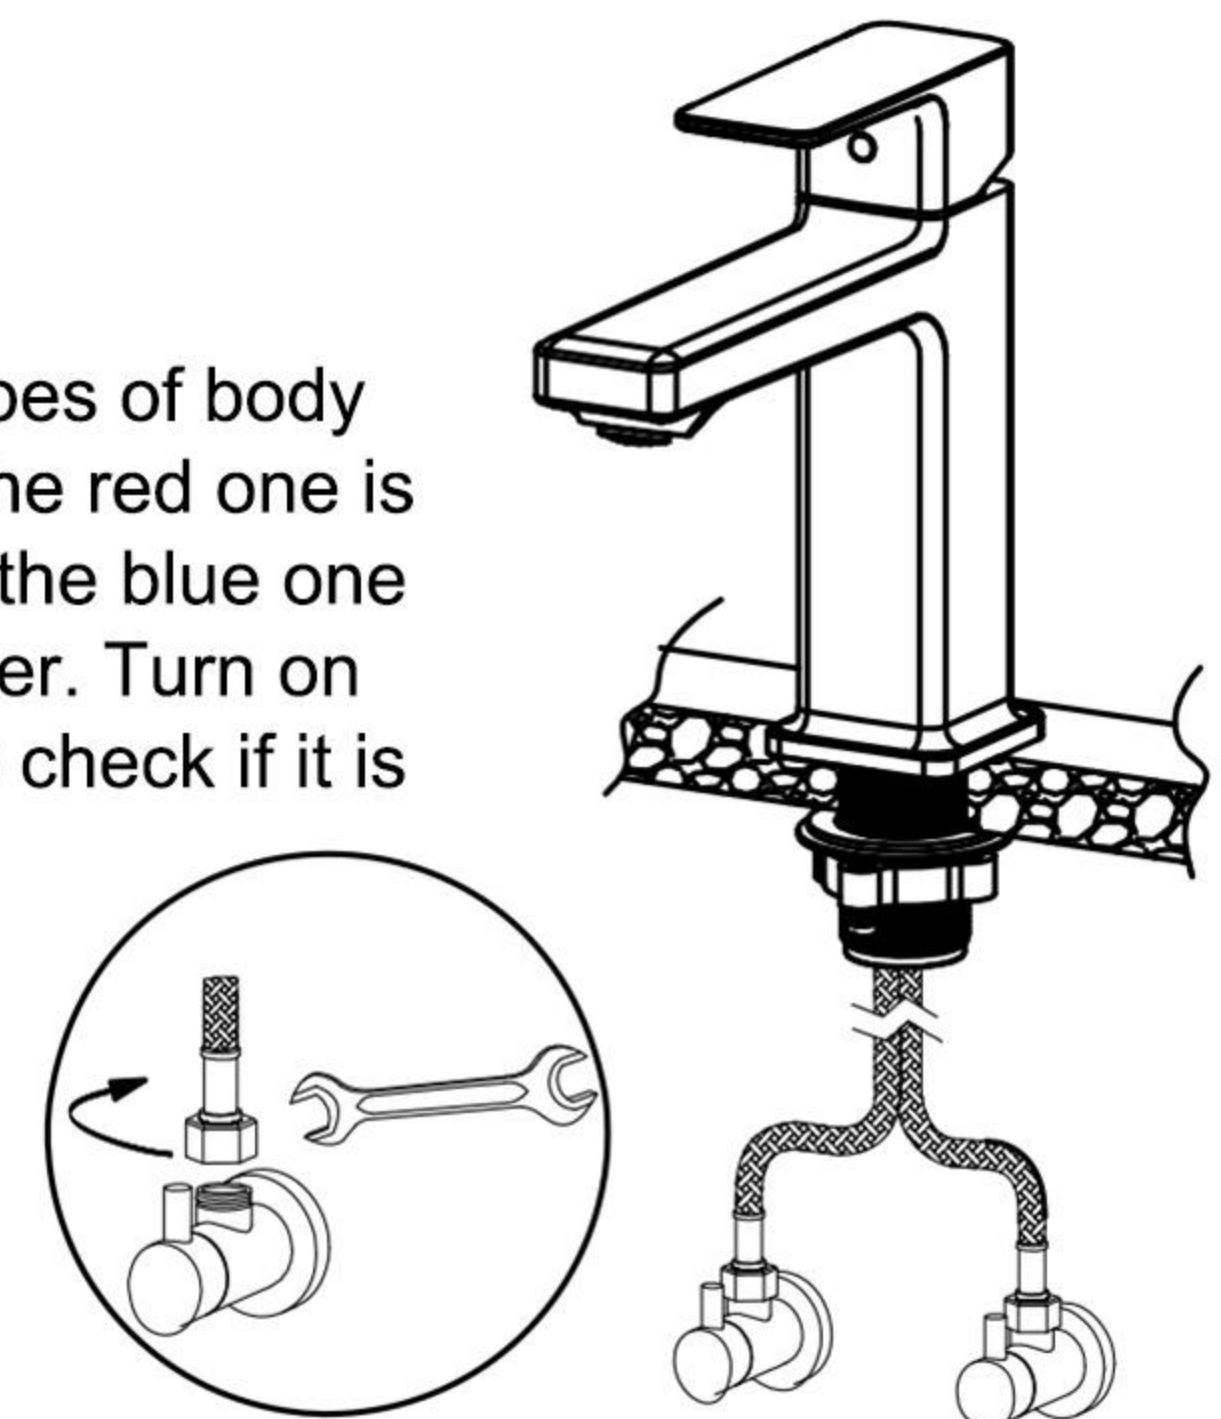


5 Faucet Care And Maintenance

a. To keep the faucet surface bright and clean, please clean the faucet regularly:

1. Use clean water to wash the faucet and wipe it dry with a soft cotton cloth.
2. Avoid using cleaning powder, polishing powder, and other abrasive detergents or nylon brushes, as this may scratch and corrode the product.
3. Do not use acidic cleaning agents to wash the faucet, as this may cause corrosion on the surface of the faucet. If the faucet comes into contact with harmful acidic agents, rinse it off with water immediately.

b. If you want to thoroughly clean the faucet, please follow the steps below:

1. Use clean water and a soft cloth to remove as much surface dirt and grime as possible.
2. Use one of the following cleaning agents to remove surface dirt and grime:
 - (1) Mild liquid cleanser
 - (2) Colorless glass cleaner that does not have abrasive properties and can be completely dissolved (according to instructions)
 - (3) Polish liquid that does not have abrasive properties.
3. After cleaning, rinse off all of the cleaning agent with clean water and wipe dry with a soft cotton.

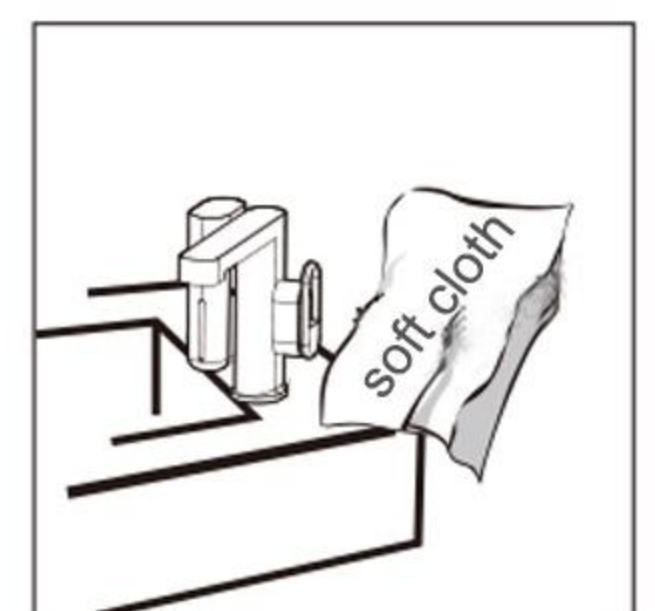

For customer support or assistance with product installation, please feel free to contact us:

Email: support@rainly.io

Our dedicated support team is available to assist you and provide the best customer service experience. Please don't hesitate to reach out if you have any questions or encounter any issues.