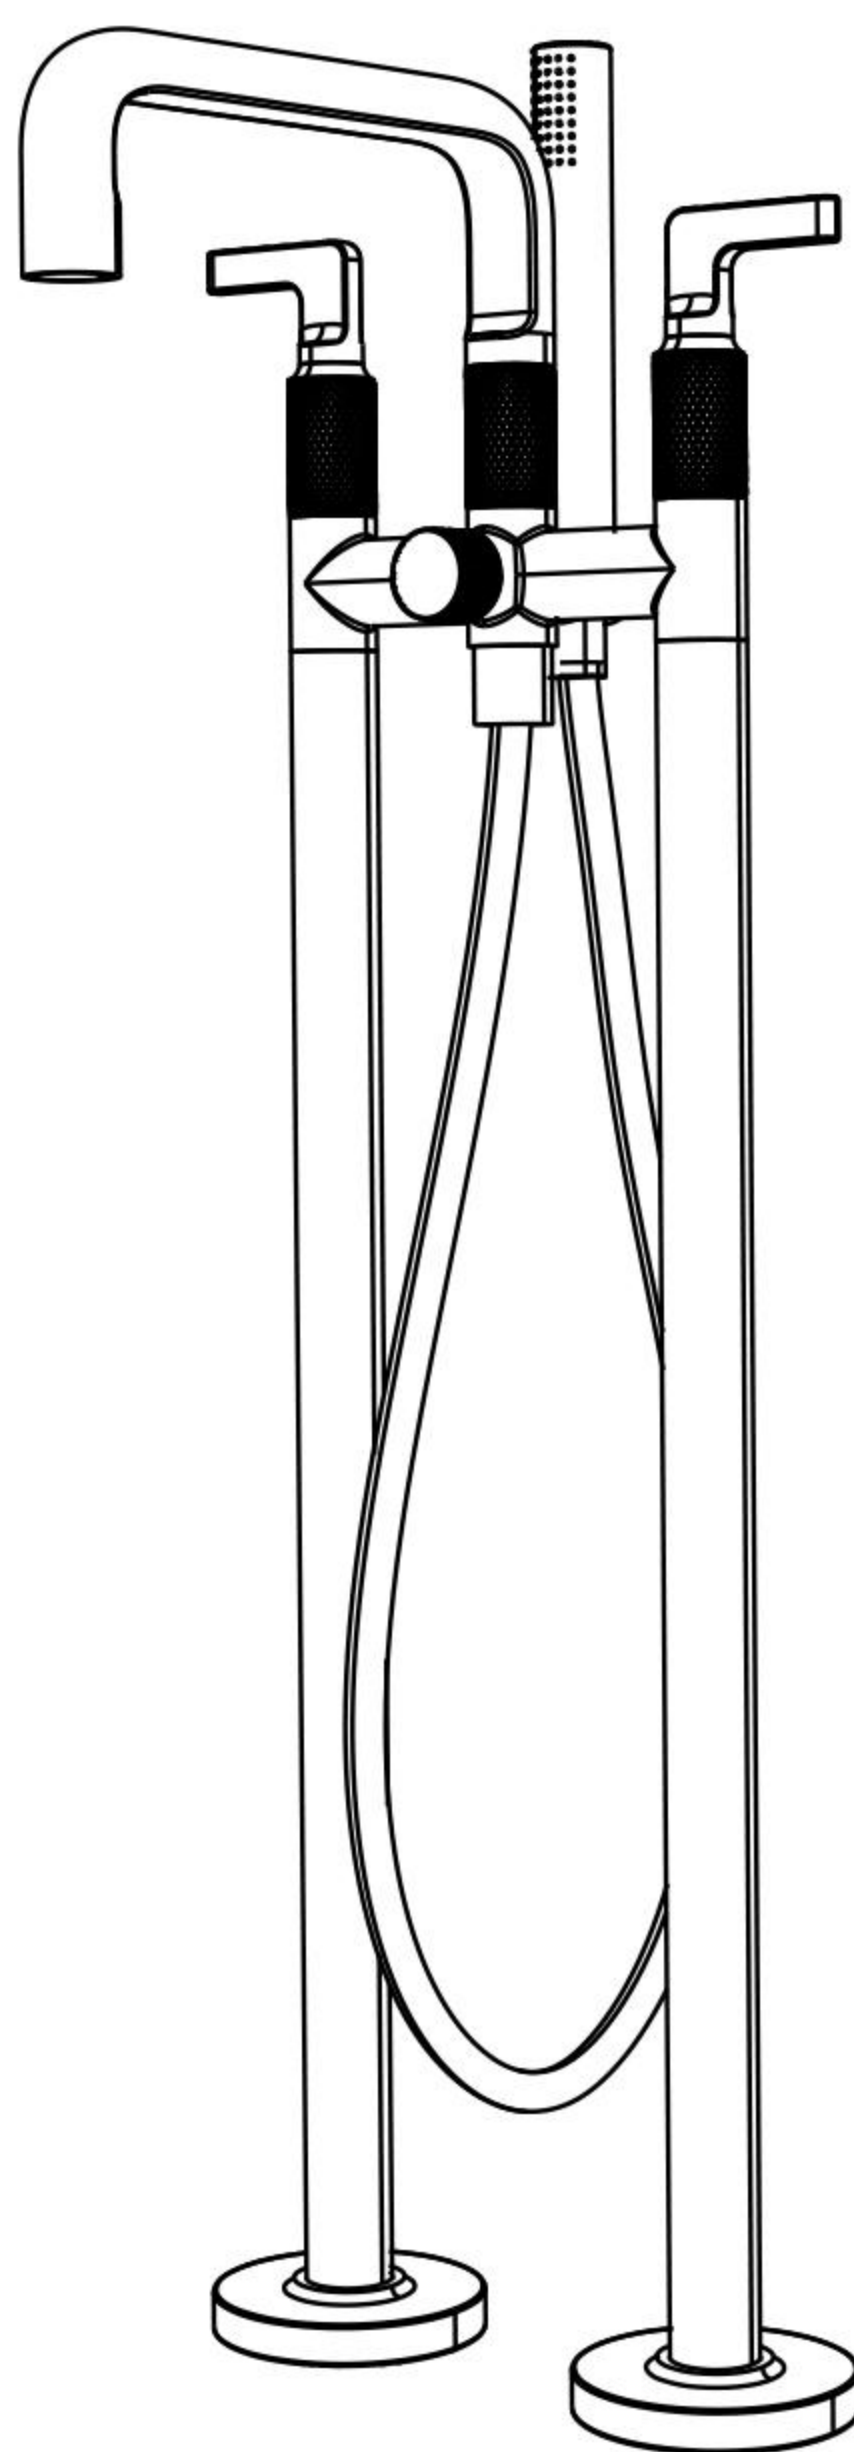


Installation instructions

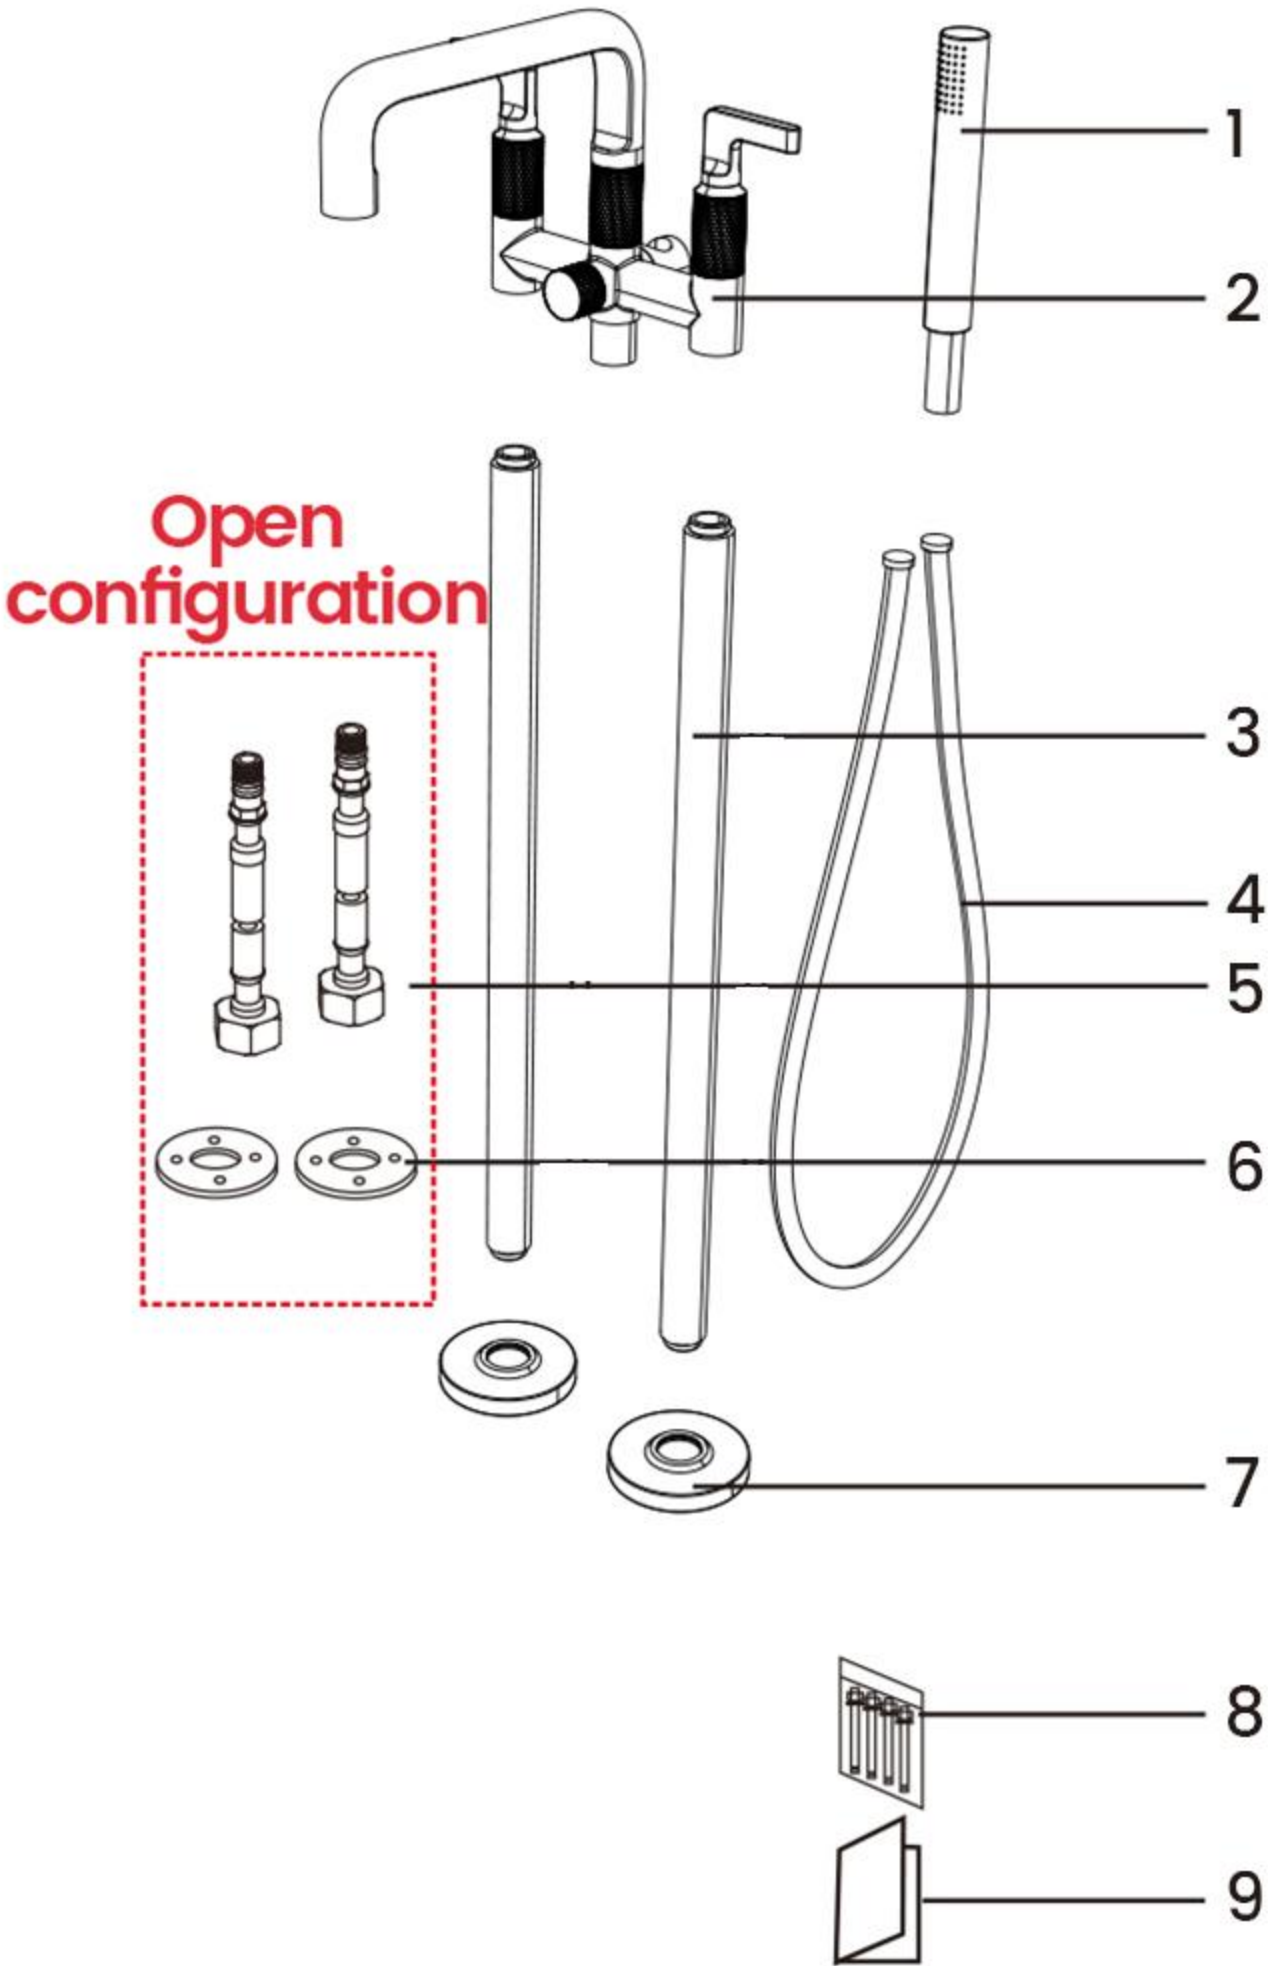
Buried floor mounted bathtub faucet



Precautions before installation


- 1、 Check whether the product in the package is the same product as this installation manual.
- 2、 Check whether the spare parts in the package are complete according to the attached drawing.
- 3、 Ensure that the product is suitable for use in the environment (pressure: 0.05MPa-1MPa, temperature: 5°C-90°C).
- 4、 Check whether the product and spare parts are damaged.
- 5、 Clean the impurities in the pipeline.

Packing List









- 1、 Holding flower wine
- 2、 Tap body
- 3、 Copper pipe of column
- 4、 Shower hose
- 5、 Water inlet braided pipe
- 6、 Flange
- 7、 Decorative cover
- 8、 Expansion screw package
- 9、 Instructions

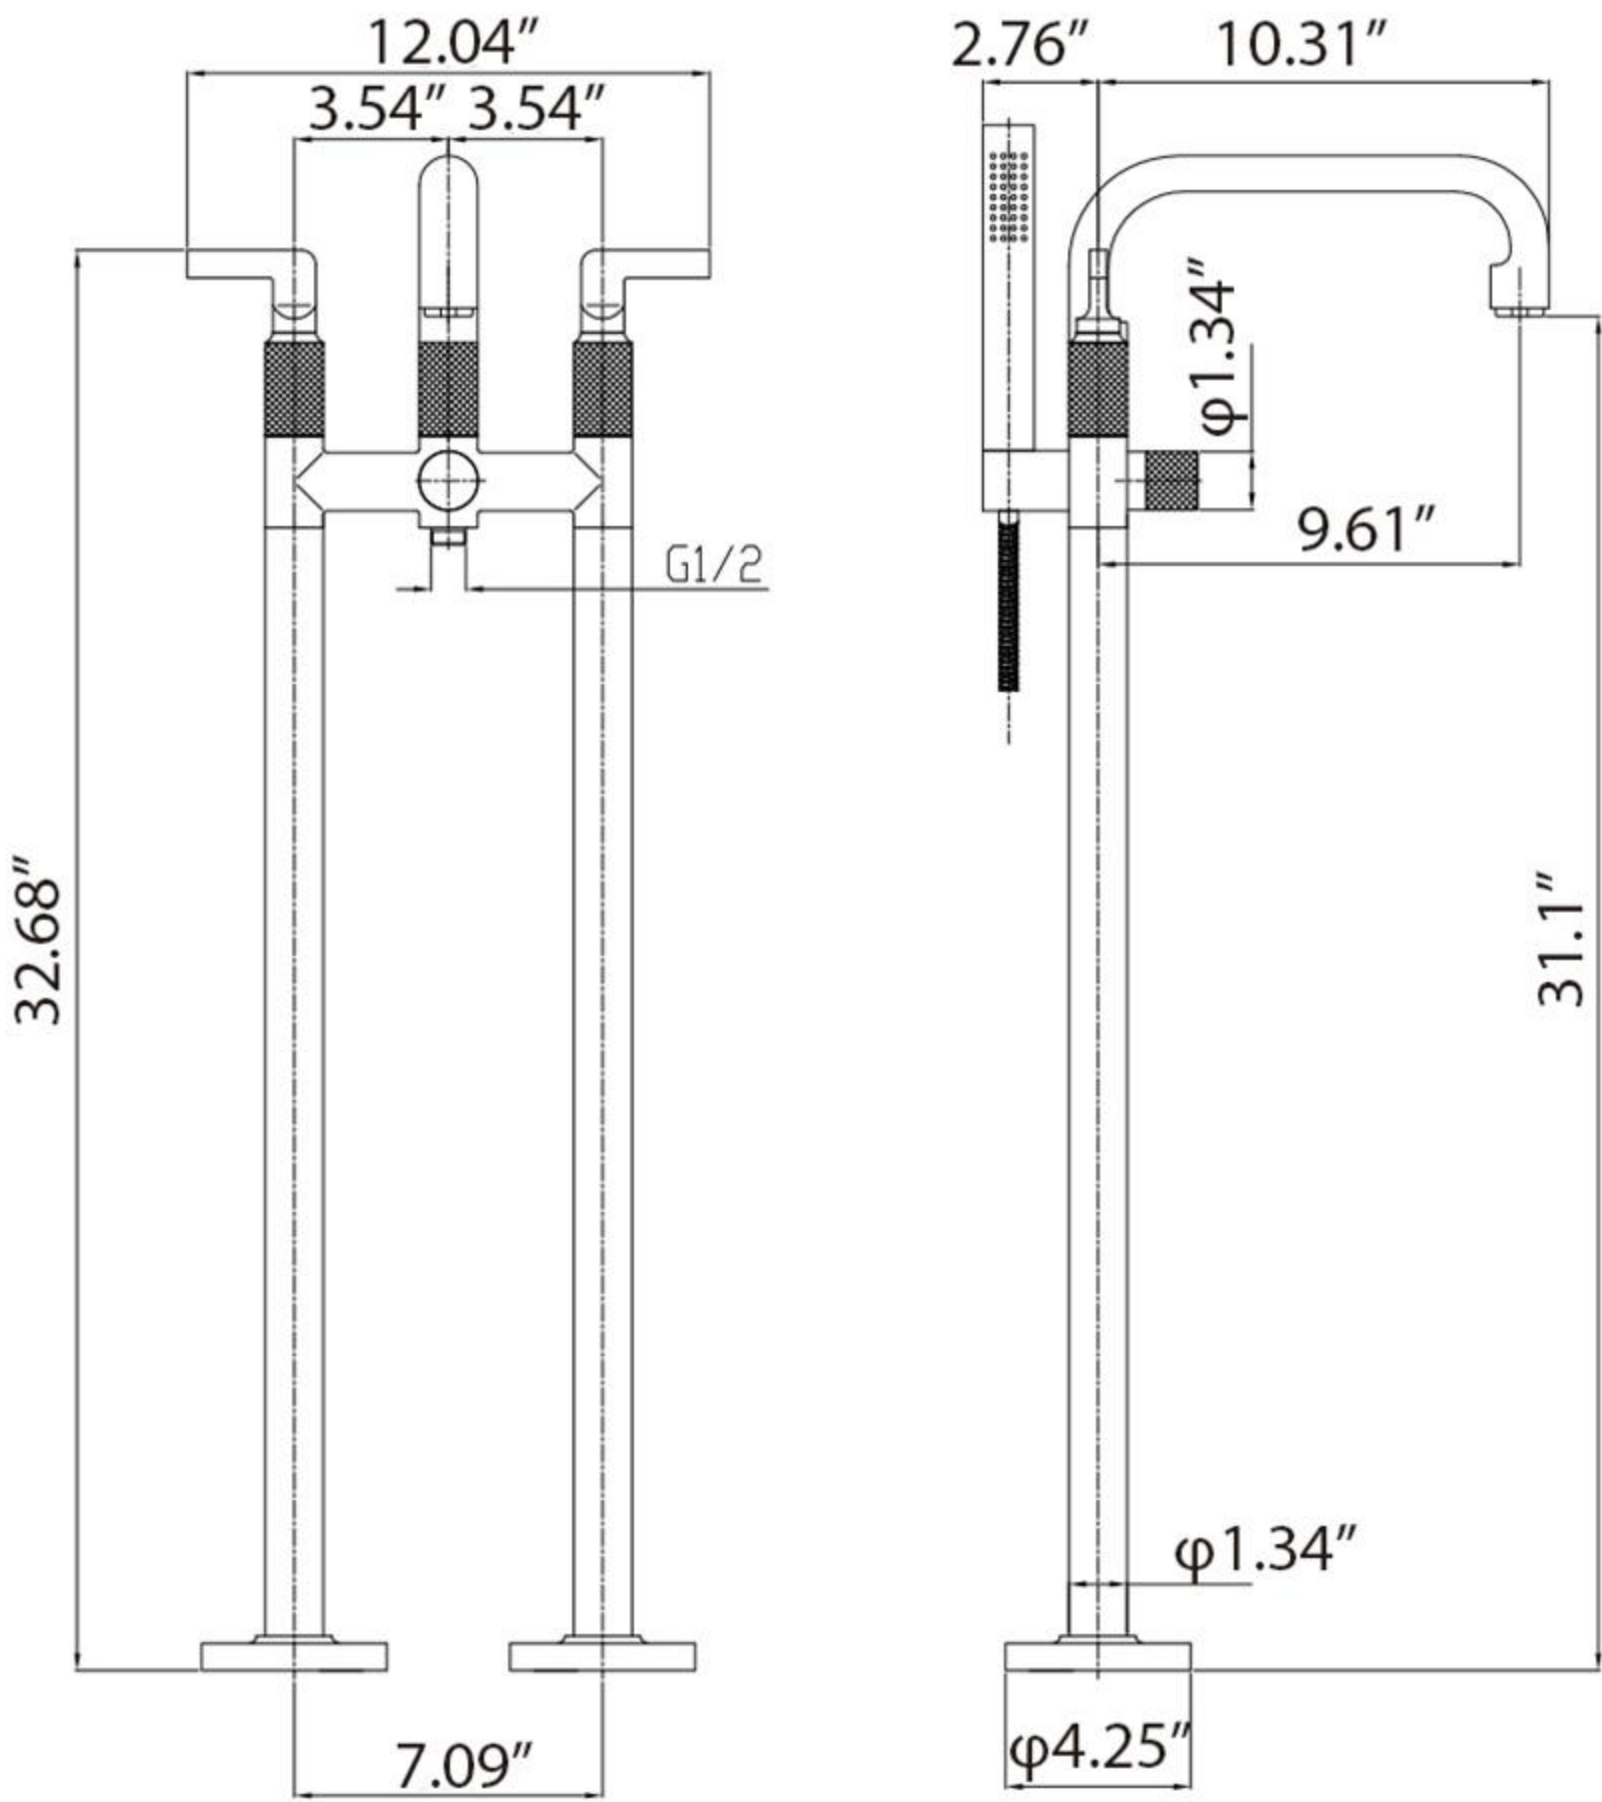Product size



Installation steps (open type)

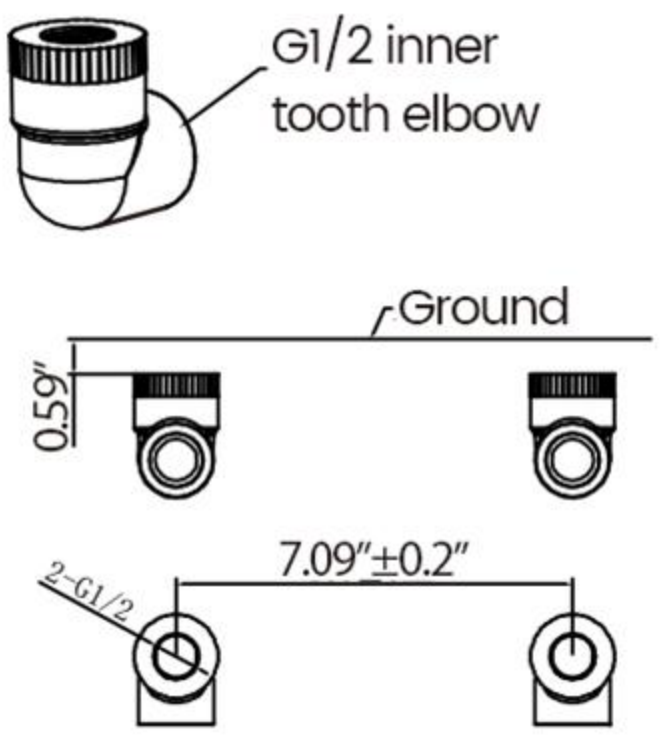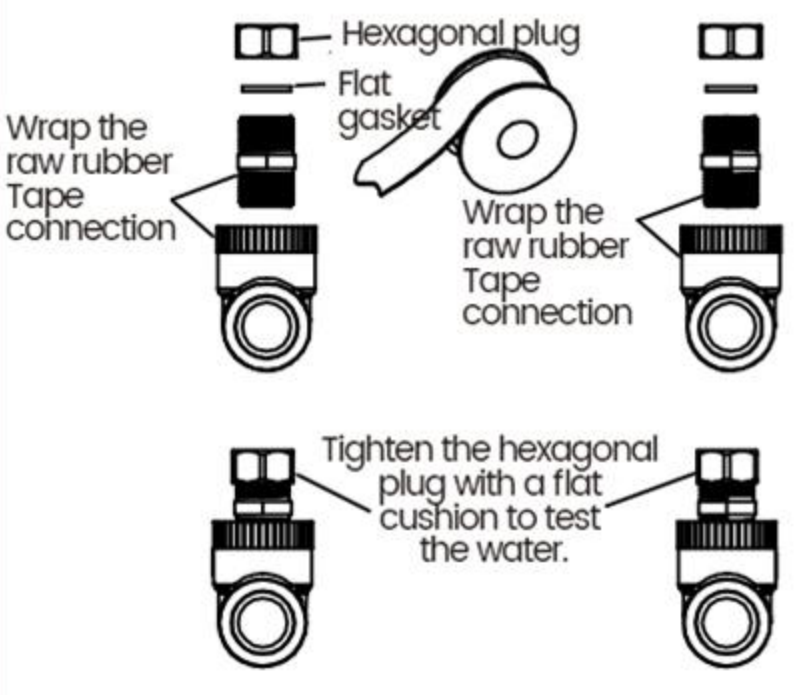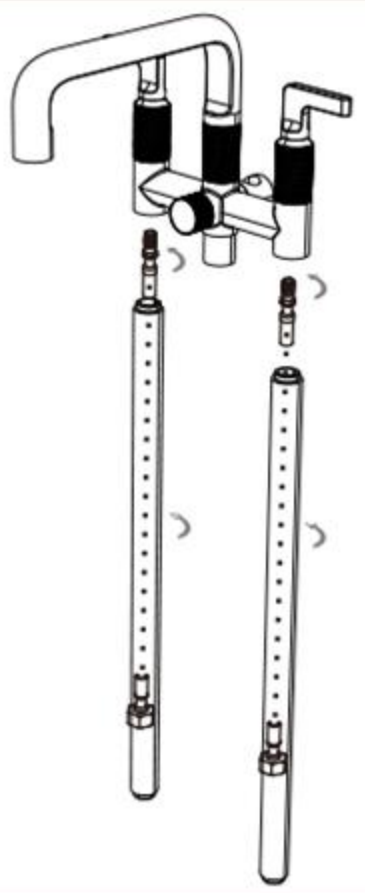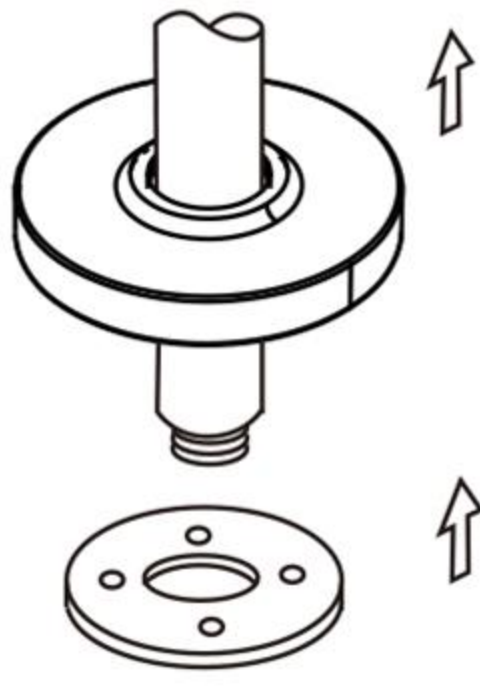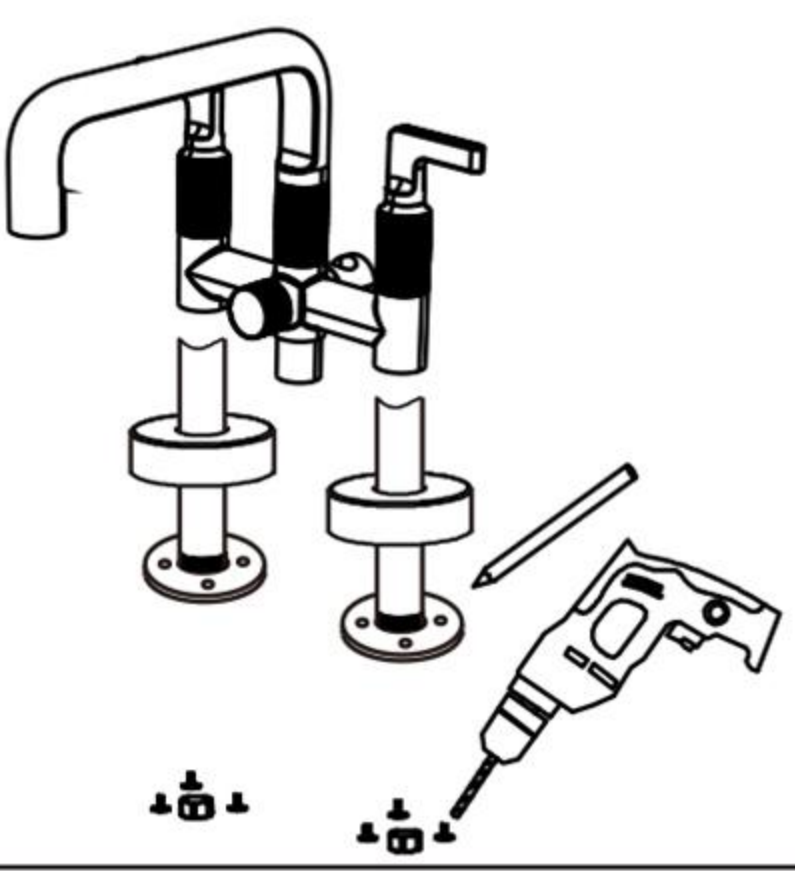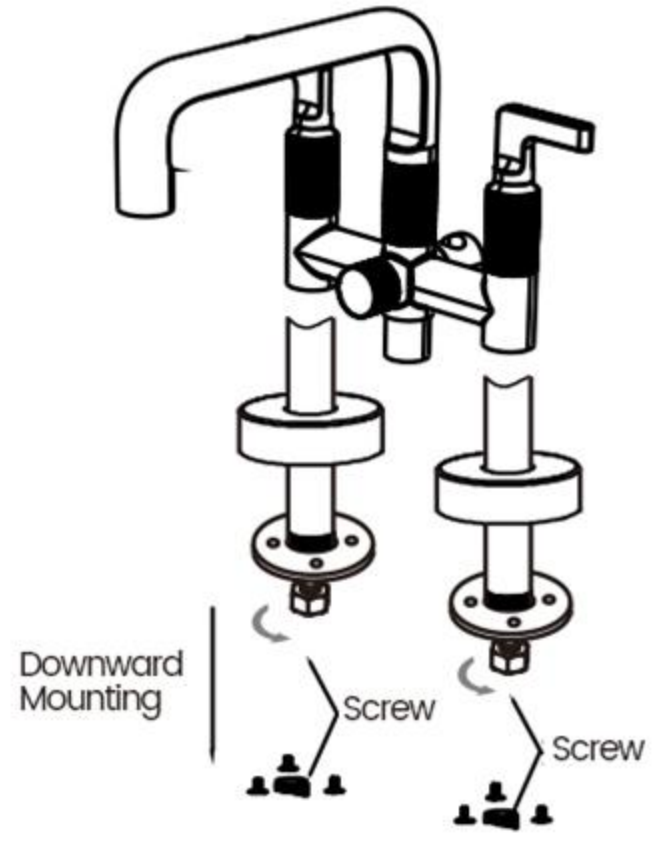 1. Work according to the dimensions shown above.	 2. Follow the diagram above.	 3. Install the water inlet braided pipe to the mixer body and then install the outer column copper pipe.
 4. Put the decorative cover from the lower part of the faucet upwards into the riser copper pipe and screw the flange clockwise into the bottom of the body.	 5. Align the assembly with the ground water inlet fitting then adjust the fixing piece to the right position and draw a line to punch the hole and drive in the expansion nail.	 6. Unscrew the hexagonal plug then connect the water inlet pipe. Finally, pass the main body group through the fixed piece, fix it to the expansion nail and lock it.

Use and maintenance

- faucet handle rotation for opening, anti-rotation for closing, the left handle to turn on the hot water increase, the right handle to turn on the Cold water increase.
- rotate to switch on can be switched to flower wine out of the water, the other direction, rotate to switch to the spout out of the water.
- in order to keep the faucet external surface clean and shiny and good performance, need to regularly surface cleaning, cleaning process do not use acidic detergents and have abrasive cleaning tools.
- in the process of use, the water nozzle will inevitably be clogged due to impurities or dirt resulting in reduced water flow, you can rotate the mesh nozzle shell, clean the mesh nozzle and then install it back to the original position.
- This warranty will not be replaced if lost, please keep it in a safe place.

Product category	Main accessories	Guarantee	Remarks
Faucet products (except single cold faucet)	Body and spool	Five years	Faucet body and ceramic spool, does not contain man-made damage improper maintenance and plating surface damage.
	The rest of the parts and accessories	One year	Handle, water wave device, hose, seal, connecting tube, hand held hops, top spray hops, feet, decorative caps, fastening parts, gaskets, mounting components, other accessories, etc., does not include human damage.