



INSTRUCTION MANUAL

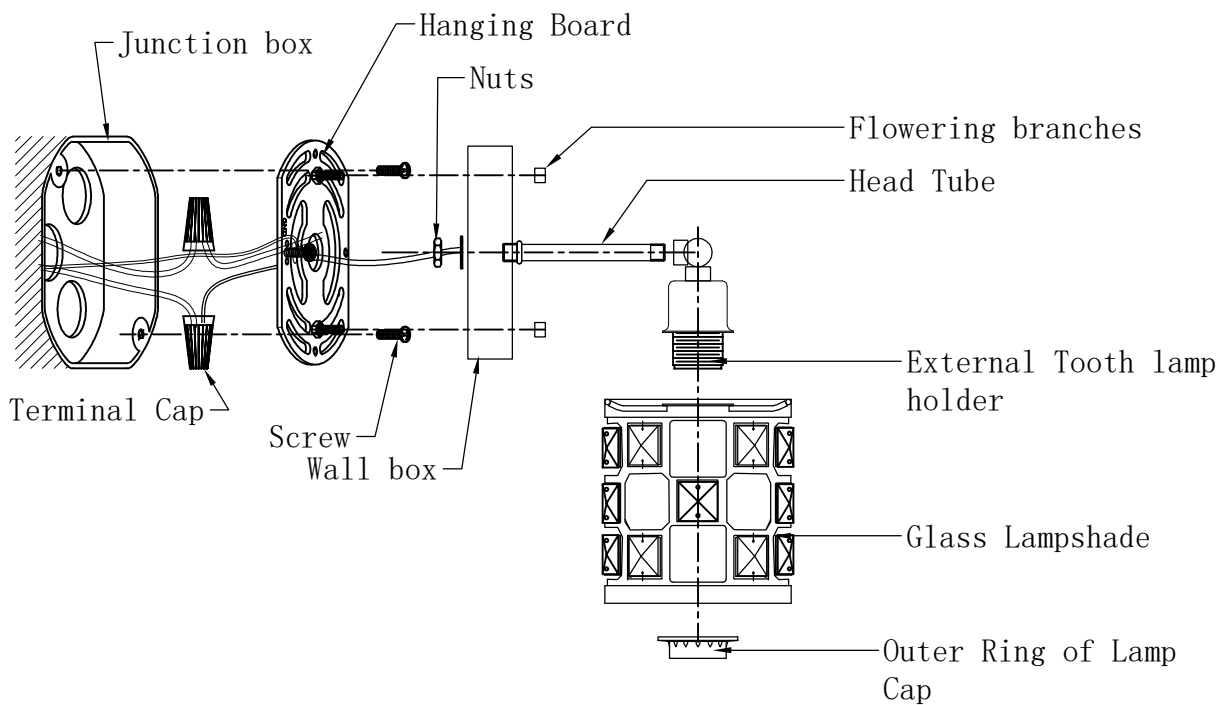

1. Pass the lamp thread through the header tube, then screw one end of the header tube into the lamp body, and lock it on the wall box with a nut.
2. Connect the wires with the Terminal Cap (black is positive and white is negative)
3. Lock the panel to the junction box with an M4 screw.
4. The top suction plate is locked on the hanging board with a metal bottom axle;
5. Lock the crystal lampshade with the outer ring of the lampholder on the outer tooth lampholder.
6. Screw in the light bulb and turn it on.

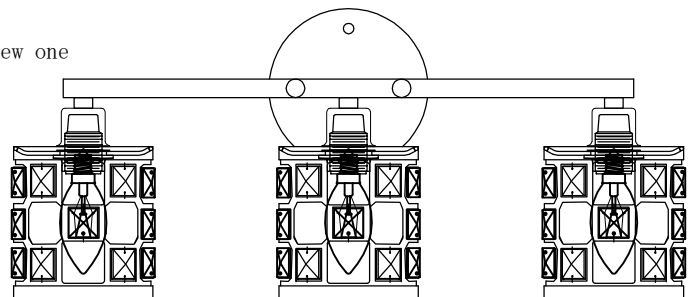

matters need attention

- 1 Rated Voltage 120V, 60Hz, lamp power $\leq 60W$
- 2 Avoid scratching the surface and wire of the lamp when installing, and wear gloves when installing, please don't hit the lamp tube to avoid injury (to avoid damage)
- 3 Use Medium paper, cloth and other flammable materials do not close to the bulb (to avoid causing a fire)
- 4 LUMINAIRES shall not be near acids, alkalis containing corrosive chemicals and gases, shall not be washed with water, can only be cleaned with a clean soft cloth.
- 5 Please do not touch the lamp tube while in use or after the lamp is switched off (avoid scalding)
- 6 Please do not use in the place of excessive humidity or high temperature.
- 7 When installing, cleaning and changing lamps, the power supply should be cut off (avoid electric shock)