

Indoor Ceiling Fan

Fir	nish		
		Dimensions (Inches)	
Brushed Nickel	Antique Bronze	Α	<u>B</u>
		52	16

Blades		
Side 1	Natural Cherry	Medium Cherry
Side 2	Cherry	Classic Walnut

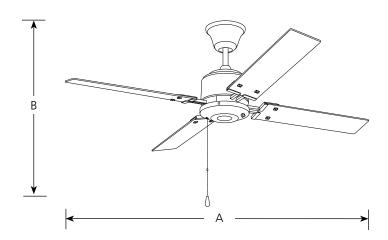



Fan mounted as close-to-ceiling.

Specifications:

General

- 30 year limited warranty
- Pull chain on brushed nickel is chrome with a maple fob and antique brass is oxide with a walnut fob

Blades

- Four blades
- Reversible
- 12.5 degree pitch
- · Sure Connect blade attachment system
 - Screws preinstalled in blades for attachment to motor arms
 - ° Special guides align blades to motor arms
 - Preinstalled rubber isolation pads minimize vibration noise
- Plywood blade construction

ENERGY INFORMATION AT HIGH SPEED

AIRFLOW: 4248 CFM cubic feet per minute

ELECTRICITY USE: 53 watts (excludes lights)

AIRFLOW EFFICIENCY: 76 cubic feet per minute per watt

Motor

- 3-speed pullchain control
- Triple capacitor speed control; manual reverse control
- 153mm dia x 18mm high

Mounting

- A 1"x 6" downrod is included. Longer accessory downrods can be ordered separately
- Standard canopy designed for sloped ceilings up to 45 degrees (12:12 ceiling pitch)
- Oversized, textured die cast hanger ball reduces noise and wobble vibrations
- Canopy covers standard recessed 4" octagonal outlet box. Note: An outlet box assembly designed for fan installation is required (not included)
- Mounting hardware is included
- Close-to-ceiling installation 11 " ht.

Electrical

- 80" lead wires included
- Light fixture adaptable
- Pre-wired

<u>Labeling</u>

UL listed